

---

# **MMDetection**

***Release 3.0.0***

**MMDetection Authors**

**Apr 06, 2023**



## GET STARTED


<b>1</b>	<b>OVERVIEW</b>	<b>1</b>
<b>2</b>	<b>GET STARTED</b>	<b>3</b>
<b>3</b>	<b>Train &amp; Test</b>	<b>9</b>
<b>4</b>	<b>Useful Tools</b>	<b>69</b>
<b>5</b>	<b>Basic Concepts</b>	<b>105</b>
<b>6</b>	<b>Component Customization</b>	<b>109</b>
<b>7</b>	<b>How to</b>	<b>137</b>
<b>8</b>	<b>Migrating from MMDetection 2.x to 3.x</b>	<b>143</b>
<b>9</b>	<b>mmdet.apis</b>	<b>145</b>
<b>10</b>	<b>mmdet.datasets</b>	<b>147</b>
<b>11</b>	<b>mmdet.engine</b>	<b>151</b>
<b>12</b>	<b>mmdet.evaluation</b>	<b>157</b>
<b>13</b>	<b>mmdet.models</b>	<b>163</b>
<b>14</b>	<b>mmdet.structures</b>	<b>165</b>
<b>15</b>	<b>mmdet.testing</b>	<b>169</b>
<b>16</b>	<b>mmdet.visualization</b>	<b>171</b>
<b>17</b>	<b>mmdet.utils</b>	<b>173</b>
<b>18</b>	<b>Benchmark and Model Zoo</b>	<b>177</b>
<b>19</b>	<b>Contribution</b>	<b>187</b>
<b>20</b>	<b>Projects based on MMDetection</b>	<b>189</b>
<b>21</b>	<b>Changelog of v3.x</b>	<b>191</b>
<b>22</b>	<b>Changelog v2.x</b>	<b>207</b>

<b>23 Frequently Asked Questions</b>	<b>251</b>
<b>24 Compatibility of MMDetection 2.x</b>	<b>257</b>
<b>25 English</b>	<b>263</b>
<b>26</b>	<b>265</b>
<b>27 Indices and tables</b>	<b>267</b>
<b>Python Module Index</b>	<b>269</b>
<b>Index</b>	<b>271</b>

## OVERVIEW

This chapter introduces you to the framework of MMDetection, and provides links to detailed tutorials about MMDetection.

### 1.1 What is MMDetection

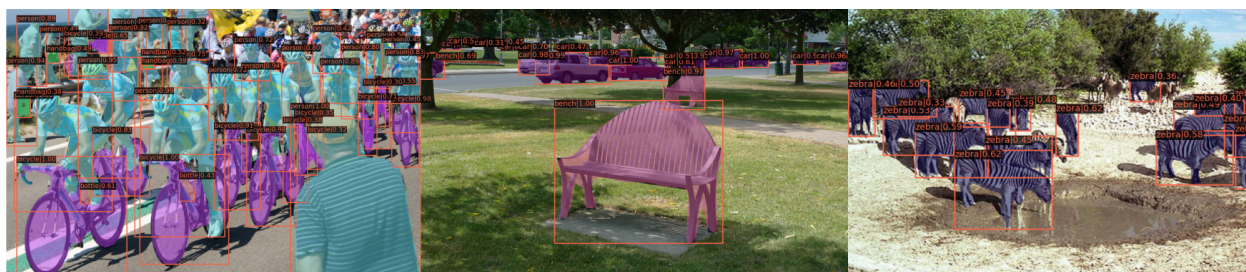

MMDetection is an object detection toolbox that contains a rich set of object detection, instance segmentation, and panoptic segmentation methods as well as related components and modules, and below is its whole framework:

MMDetection consists of 7 main parts, apis, structures, datasets, models, engine, evaluation and visualization.

- **apis** provides high-level APIs for model inference.
- **structures** provides data structures like bbox, mask, and DetDataSample.
- **datasets** supports various dataset for object detection, instance segmentation, and panoptic segmentation.
  - **transforms** contains a lot of useful data augmentation transforms.
  - **samplers** defines different data loader sampling strategy.
- **models** is the most vital part for detectors and contains different components of a detector.
  - **detectors** defines all of the detection model classes.
  - **data\_preprocessors** is for preprocessing the input data of the model.
  - **backbones** contains various backbone networks.
  - **necks** contains various neck components.
  - **dense\_heads** contains various detection heads that perform dense predictions.
  - **roi\_heads** contains various detection heads that predict from RoIs.
  - **seg\_heads** contains various segmentation heads.
  - **losses** contains various loss functions.

- **task\_modules** provides modules for detection tasks. E.g. assigners, samplers, box coders, and prior generators.
- **layers** provides some basic neural network layers.
- **engine** is a part for runtime components.
  - **runner** provides extensions for [MMEngine's runner](#).
  - **schedulers** provides schedulers for adjusting optimization hyperparameters.
  - **optimizers** provides optimizers and optimizer wrappers.
  - **hooks** provides various hooks of the runner.
- **evaluation** provides different metrics for evaluating model performance.
- **visualization** is for visualizing detection results.

## 1.2 How to Use this Guide

Here is a detailed step-by-step guide to learn more about MMDetection:

1. For installation instructions, please see [get\\_started](#).
2. Refer to the below tutorials for the basic usage of MMDetection.
  - [Train and Test](#)
  - [Useful Tools](#)
3. Refer to the below tutorials to dive deeper:
  - [Basic Concepts](#)
  - [Component Customization](#)
4. For users of MMDetection 2.x version, we provide a guide to help you adapt to the new version. You can find it in the [migration guide](#).

## GET STARTED

### 2.1 Prerequisites

In this section, we demonstrate how to prepare an environment with PyTorch.

MMDetection works on Linux, Windows, and macOS. It requires Python 3.7+, CUDA 9.2+, and PyTorch 1.6+.

---

**Note:** If you are experienced with PyTorch and have already installed it, just skip this part and jump to the [next section](#). Otherwise, you can follow these steps for the preparation.

---

**Step 0.** Download and install Miniconda from the [official website](#).

**Step 1.** Create a conda environment and activate it.

```
conda create --name openmmlab python=3.8 -y
conda activate openmmlab
```

**Step 2.** Install PyTorch following [official instructions](#), e.g.

On GPU platforms:

```
conda install pytorch torchvision -c pytorch
```

On CPU platforms:

```
conda install pytorch torchvision cpuonly -c pytorch
```

### 2.2 Installation

We recommend that users follow our best practices to install MMDetection. However, the whole process is highly customizable. See [Customize Installation](#) section for more information.

## 2.2.1 Best Practices

**Step 0.** Install MMEngine and MMCV using MIM.

```
pip install -U openmim
mim install mmengine
mim install "mmlcv>=2.0.0"
```

**Note:** In MMCV-v2.x, mmlcv-full is rename to mmlcv, if you want to install mmlcv without CUDA ops, you can use mim install "mmlcv-lite>=2.0.0rc1" to install the lite version.

**Step 1.** Install MMDetection.

Case a: If you develop and run mmdet directly, install it from source:

```
git clone https://github.com/open-mmlab/mmdetection.git
cd mmdetection
pip install -v -e .
# "-v" means verbose, or more output
# "-e" means installing a project in editable mode,
# thus any local modifications made to the code will take effect without reinstallation.
```

Case b: If you use mmdet as a dependency or third-party package, install it with MIM:

```
mim install mmdet
```

## 2.3 Verify the installation

To verify whether MMDetection is installed correctly, we provide some sample codes to run an inference demo.

**Step 1.** We need to download config and checkpoint files.

```
mim download mmdet --config rtmDET_tiny_8xb32-300e_coco --dest .
```

The downloading will take several seconds or more, depending on your network environment. When it is done, you will find two files rtmDET\_tiny\_8xb32-300e\_coco.py and rtmDET\_tiny\_8xb32-300e\_coco\_20220902\_112414-78e30dcc.pth in your current folder.

**Step 2.** Verify the inference demo.

Case a: If you install MMDetection from source, just run the following command.

```
python demo/image_demo.py demo/demo.jpg rtmDET_tiny_8xb32-300e_coco.py --weights rtmDET_
tiny_8xb32-300e_coco_20220902_112414-78e30dcc.pth --device cpu
```

You will see a new image demo.jpg on your ./outputs/vis folder, where bounding boxes are plotted on cars, benches, etc.

Case b: If you install MMDetection with MIM, open your python interpreter and copy&paste the following codes.

```
from mmdet.apis import init_detector, inference_detector

config_file = 'rtmDET_tiny_8xb32-300e_coco.py'
checkpoint_file = 'rtmDET_tiny_8xb32-300e_coco_20220902_112414-78e30dcc.pth'
model = init_detector(config_file, checkpoint_file, device='cpu') # or device='cuda:0'
inference_detector(model, 'demo/demo.jpg')
```

You will see a list of `DetDataSample`, and the predictions are in the `pred_instance`, indicating the detected bounding boxes, labels, and scores.

## 2.3.1 Customize Installation

### CUDA versions

When installing PyTorch, you need to specify the version of CUDA. If you are not clear on which to choose, follow our recommendations:

- For Ampere-based NVIDIA GPUs, such as GeForce 30 series and NVIDIA A100, CUDA 11 is a must.
- For older NVIDIA GPUs, CUDA 11 is backward compatible, but CUDA 10.2 offers better compatibility and is more lightweight.

Please make sure the GPU driver satisfies the minimum version requirements. See [this table](#) for more information.

---

**Note:** Installing CUDA runtime libraries is enough if you follow our best practices, because no CUDA code will be compiled locally. However, if you hope to compile MMCV from source or develop other CUDA operators, you need to install the complete CUDA toolkit from NVIDIA's [website](#), and its version should match the CUDA version of PyTorch. i.e., the specified version of `cuda-toolkit` in the `conda install` command.

---

### Install MMEEngine without MIM

To install MMEEngine with pip instead of MIM, please follow [MMEEngine installation guides](#).

For example, you can install MMEEngine by the following command.

```
pip install mmengine
```

### Install MMCV without MIM

MMCV contains C++ and CUDA extensions, thus depending on PyTorch in a complex way. MIM solves such dependencies automatically and makes the installation easier. However, it is not a must.

To install MMCV with pip instead of MIM, please follow [MMCV installation guides](#). This requires manually specifying a find-url based on the PyTorch version and its CUDA version.

For example, the following command installs MMCV built for PyTorch 1.12.x and CUDA 11.6.

```
pip install "mmcv>=2.0.0" -f https://download.openmmlab.com/mmcv/dist/cu116/torch1.12.0/
↪index.html
```

## Install on CPU-only platforms

MMDetection can be built for CPU-only environments. In CPU mode you can train (requires MMCV version  $\geq 2.0.0rc1$ ), test, or infer a model.

However, some functionalities are gone in this mode:

- Deformable Convolution
- Modulated Deformable Convolution
- ROI pooling
- Deformable ROI pooling
- CARAFE
- SyncBatchNorm
- CrissCrossAttention
- MaskedConv2d
- Temporal Interlace Shift
- nms\_cuda
- sigmoid\_focal\_loss\_cuda
- bbox\_overlaps

If you try to train/test/infer a model containing the above ops, an error will be raised. The following table lists affected algorithms.

## Install on Google Colab

Google Colab usually has PyTorch installed, thus we only need to install MMEEngine, MMCV, and MMDetection with the following commands.

**Step 1.** Install MMEEngine and MMCV using MIM.

```
!pip3 install openmim
!mim install mmengine
!mim install "mmdcv>=2.0.0,<2.1.0"
```

**Step 2.** Install MMDetection from the source.

```
!git clone https://github.com/open-mmlab/mmdetection.git
%cd mmdetection
!pip install -e .
```

**Step 3.** Verification.

```
import mmdet
print(mmdet.__version__)
# Example output: 3.0.0, or an another version.
```

---

**Note:** Within Jupyter, the exclamation mark ! is used to call external executables and %cd is a magic command to change the current working directory of Python.

---

## Use MMDetection with Docker

We provide a Dockerfile to build an image. Ensure that your `docker version`  $\geq 19.03$ .

```
# build an image with PyTorch 1.9, CUDA 11.1
# If you prefer other versions, just modified the Dockerfile
docker build -t mmdetection docker/
```

Run it with

```
docker run --gpus all --shm-size=8g -it -v {DATA_DIR}:/mmdetection/data mmdetection
```

### 2.3.2 Troubleshooting

If you have some issues during the installation, please first view the [FAQ](#) page. You may [open an issue](#) on GitHub if no solution is found.

### 2.3.3 Use Multiple Versions of MMDetection in Development

Training and testing scripts have already been modified in `PYTHONPATH` in order to make sure the scripts are using their own versions of MMDetection.

To install the default version of MMDetection in your environment, you can exclude the follow code in the relative scripts:

```
PYTHONPATH="$(dirname $0)/..":$PYTHONPATH
```



## TRAIN & TEST

MMDetection provides hundreds of pretrained detection models in [Model Zoo](#), and supports multiple standard datasets, including Pascal VOC, COCO, CityScapes, LVIS, etc. This note will show how to perform common tasks on these existing models and standard datasets:

### 3.1 Learn about Configs

MMDetection and other OpenMMLab repositories use [MMEEngine's config system](#). It has a modular and inheritance design, which is convenient to conduct various experiments.

#### 3.1.1 Config file content

MMDetection uses a modular design, all modules with different functions can be configured through the config. Taking Mask R-CNN as an example, we will introduce each field in the config according to different function modules:

##### Model config

In MMDetection's config, we use `model` to set up detection algorithm components. In addition to neural network components such as `backbone`, `neck`, etc, it also requires `data_preprocessor`, `train_cfg`, and `test_cfg`. `data_preprocessor` is responsible for processing a batch of data output by dataloader. `train_cfg`, and `test_cfg` in the model config are for training and testing hyperparameters of the components.

```
model = dict(
    type='MaskRCNN', # The name of detector
    data_preprocessor=dict( # The config of data preprocessor, usually includes image_
        ↪normalization and padding
        type='DetDataPreprocessor', # The type of the data preprocessor, refer to_
        ↪https://mmdetection.readthedocs.io/en/latest/api.html#mmdet.models.data_preprocessors.
        ↪DetDataPreprocessor
        mean=[123.675, 116.28, 103.53], # Mean values used to pre-training the pre-
        ↪trained backbone models, ordered in R, G, B
        std=[58.395, 57.12, 57.375], # Standard variance used to pre-training the pre-
        ↪trained backbone models, ordered in R, G, B
        bgr_to_rgb=True, # whether to convert image from BGR to RGB
        pad_mask=True, # whether to pad instance masks
        pad_size_divisor=32), # The size of padded image should be divisible by ``pad_
        ↪size_divisor``
    backbone=dict( # The config of backbone
```

(continues on next page)

(continued from previous page)

```

type='ResNet', # The type of backbone network. Refer to https://mmdetection.
↳readthedocs.io/en/latest/api.html#mmdet.models.backbones.ResNet
depth=50, # The depth of backbone, usually it is 50 or 101 for ResNet and
↳ResNext backbones.
num_stages=4, # Number of stages of the backbone.
out_indices=(0, 1, 2, 3), # The index of output feature maps produced in each
↳stage
frozen_stages=1, # The weights in the first stage are frozen
norm_cfg=dict( # The config of normalization layers.
    type='BN', # Type of norm layer, usually it is BN or GN
    requires_grad=True), # Whether to train the gamma and beta in BN
norm_eval=True, # Whether to freeze the statistics in BN
style='pytorch', # The style of backbone, 'pytorch' means that stride 2 layers
↳are in 3x3 Conv, 'caffe' means stride 2 layers are in 1x1 Convs.
init_cfg=dict(type='Pretrained', checkpoint='torchvision://resnet50')), #
↳The ImageNet pretrained backbone to be loaded
neck=dict(
    type='FPN', # The neck of detector is FPN. We also support 'NASFPN', 'PAFPN', etc.
↳Refer to https://mmdetection.readthedocs.io/en/latest/api.html#mmdet.models.necks.FPN
↳for more details.
    in_channels=[256, 512, 1024, 2048], # The input channels, this is consistent
↳with the output channels of backbone
    out_channels=256, # The output channels of each level of the pyramid feature map
    num_outs=5), # The number of output scales
rpn_head=dict(
    type='RPNHead', # The type of RPN head is 'RPNHead', we also support 'GARPNHead',
↳etc. Refer to https://mmdetection.readthedocs.io/en/latest/api.html#mmdet.models.dense_
↳heads.RPNHead for more details.
    in_channels=256, # The input channels of each input feature map, this is
↳consistent with the output channels of neck
    feat_channels=256, # Feature channels of convolutional layers in the head.
    anchor_generator=dict( # The config of anchor generator
        type='AnchorGenerator', # Most of methods use AnchorGenerator, SSD
↳Detectors uses `SSDAnchorGenerator`. Refer to https://github.com/open-mmlab/mmdetection/
↳blob/main/mmdet/models/task_modules/prior_generators/anchor_generator.py#L18 for more
↳details
        scales=[8], # Basic scale of the anchor, the area of the anchor in one
↳position of a feature map will be scale * base_sizes
        ratios=[0.5, 1.0, 2.0], # The ratio between height and width.
        strides=[4, 8, 16, 32, 64]), # The strides of the anchor generator. This is
↳consistent with the FPN feature strides. The strides will be taken as base_sizes if
↳base_sizes is not set.
    bbox_coder=dict( # Config of box coder to encode and decode the boxes during
↳training and testing
        type='DeltaXYWHBBoxCoder', # Type of box coder. 'DeltaXYWHBBoxCoder' is
↳applied for most of the methods. Refer to https://github.com/open-mmlab/mmdetection/
↳blob/main/mmdet/models/task_modules/coders/delta_xywh_bbox_coder.py#L13 for more
↳details.
        target_means=[0.0, 0.0, 0.0, 0.0], # The target means used to encode and
↳decode boxes
        target_stds=[1.0, 1.0, 1.0, 1.0]), # The standard variance used to encode
↳and decode boxes

```

(continues on next page)

(continued from previous page)

```

    loss_cls=dict( # Config of loss function for the classification branch
        type='CrossEntropyLoss', # Type of loss for classification branch, we also
        ↪support FocalLoss etc. Refer to https://github.com/open-mmlab/mmdetection/blob/main/
        ↪mmdet/models/losses/cross_entropy_loss.py#L201 for more details
        use_sigmoid=True, # RPN usually performs two-class classification, so it
        ↪usually uses the sigmoid function.
        loss_weight=1.0), # Loss weight of the classification branch.
    loss_bbox=dict( # Config of loss function for the regression branch.
        type='L1Loss', # Type of loss, we also support many IoU Losses and smooth
        ↪L1-loss, etc. Refer to https://github.com/open-mmlab/mmdetection/blob/main/mmdet/
        ↪models/losses/smooth_l1_loss.py#L56 for implementation.
        loss_weight=1.0)), # Loss weight of the regression branch.
    roi_head=dict( # RoIHead encapsulates the second stage of two-stage/cascade
        ↪detectors.
        type='StandardRoIHead',
        bbox_roi_extractor=dict( # RoI feature extractor for bbox regression.
            type='SingleRoIExtractor', # Type of the RoI feature extractor, most of
            ↪methods uses SingleRoIExtractor. Refer to https://github.com/open-mmlab/mmdetection/
            ↪blob/main/mmdet/models/roi_heads/roi_extractors/single_level_roi_extractor.py#L13 for
            ↪details.
            roi_layer=dict( # Config of RoI Layer
                type='RoIAlign', # Type of RoI Layer, DeformRoIPoolingPack and
                ↪ModulatedDeformRoIPoolingPack are also supported. Refer to https://mmdcv.readthedocs.io/
                ↪en/latest/api.html#mmdcv.ops.RoIAlign for details.
                output_size=7, # The output size of feature maps.
                sampling_ratio=0), # Sampling ratio when extracting the RoI features. 0
                ↪means adaptive ratio.
                out_channels=256, # output channels of the extracted feature.
                featmap_strides=[4, 8, 16, 32]), # Strides of multi-scale feature maps. It
                ↪should be consistent with the architecture of the backbone.
            bbox_head=dict( # Config of box head in the RoIHead.
                type='Shared2FCBBoxHead', # Type of the bbox head, Refer to https://github.
                ↪com/open-mmlab/mmdetection/blob/main/mmdet/models/roi_heads/bbox_heads/convfc_bbox_
                ↪head.py#L220 for implementation details.
                in_channels=256, # Input channels for bbox head. This is consistent with
                ↪the out_channels in roi_extractor
                fc_out_channels=1024, # Output feature channels of FC layers.
                roi_feat_size=7, # Size of RoI features
                num_classes=80, # Number of classes for classification
                bbox_coder=dict( # Box coder used in the second stage.
                    type='DeltaXYWHBBoxCoder', # Type of box coder. 'DeltaXYWHBBoxCoder' is
                    ↪applied for most of the methods.
                    target_means=[0.0, 0.0, 0.0, 0.0], # Means used to encode and decode box
                    target_stds=[0.1, 0.1, 0.2, 0.2]), # Standard variance for encoding and
                    ↪decoding. It is smaller since the boxes are more accurate. [0.1, 0.1, 0.2, 0.2] is a
                    ↪conventional setting.
                    reg_class_agnostic=False, # Whether the regression is class agnostic.
                    loss_cls=dict( # Config of loss function for the classification branch
                        type='CrossEntropyLoss', # Type of loss for classification branch, we
                        ↪also support FocalLoss etc.
                        use_sigmoid=False, # Whether to use sigmoid.
                        loss_weight=1.0), # Loss weight of the classification branch.

```

(continues on next page)

(continued from previous page)

```

    loss_bbox=dict( # Config of loss function for the regression branch.
        type='L1Loss', # Type of loss, we also support many IoU Losses and
        ↪smooth L1-loss, etc.
        loss_weight=1.0)), # Loss weight of the regression branch.
    mask_roi_extractor=dict( # RoI feature extractor for mask generation.
        type='SingleRoIExtractor', # Type of the RoI feature extractor, most of
        ↪methods uses SingleRoIExtractor.
        roi_layer=dict( # Config of RoI Layer that extracts features for instance
        ↪segmentation
            type='RoIAlign', # Type of RoI Layer, DeformRoIPoolingPack and
            ↪ModulatedDeformRoIPoolingPack are also supported
            output_size=14, # The output size of feature maps.
            sampling_ratio=0), # Sampling ratio when extracting the RoI features.
        out_channels=256, # Output channels of the extracted feature.
        featmap_strides=[4, 8, 16, 32]), # Strides of multi-scale feature maps.
    mask_head=dict( # Mask prediction head
        type='FCNMaskHead', # Type of mask head, refer to https://mmdetection.
        ↪readthedocs.io/en/latest/api.html#mmdet.models.roi_heads.FCNMaskHead for
        ↪implementation details.
        num_convs=4, # Number of convolutional layers in mask head.
        in_channels=256, # Input channels, should be consistent with the output
        ↪channels of mask roi extractor.
        conv_out_channels=256, # Output channels of the convolutional layer.
        num_classes=80, # Number of class to be segmented.
        loss_mask=dict( # Config of loss function for the mask branch.
            type='CrossEntropyLoss', # Type of loss used for segmentation
            use_mask=True, # Whether to only train the mask in the correct class.
            loss_weight=1.0))), # Loss weight of mask branch.
    train_cfg = dict( # Config of training hyperparameters for rpn and rcnn
        rpn=dict( # Training config of rpn
            assigner=dict( # Config of assigner
                type='MaxIoUAssigner', # Type of assigner, MaxIoUAssigner is used for
                ↪many common detectors. Refer to https://github.com/open-mmlab/mmdetection/blob/main/
                ↪mmdet/models/task_modules/assigners/max_iou_assigner.py#L14 for more details.
                pos_iou_thr=0.7, # IoU >= threshold 0.7 will be taken as positive
                ↪samples
                neg_iou_thr=0.3, # IoU < threshold 0.3 will be taken as negative samples
                min_pos_iou=0.3, # The minimal IoU threshold to take boxes as positive
                ↪samples
                match_low_quality=True, # Whether to match the boxes under low quality
                ↪(see API doc for more details).
                ignore_iof_thr=-1), # IoF threshold for ignoring bboxes
            sampler=dict( # Config of positive/negative sampler
                type='RandomSampler', # Type of sampler, PseudoSampler and other
                ↪samplers are also supported. Refer to https://github.com/open-mmlab/mmdetection/blob/
                ↪main/mmdet/models/task_modules/samplers/random_sampler.py#L14 for implementation
                ↪details.
                num=256, # Number of samples
                pos_fraction=0.5, # The ratio of positive samples in the total samples.
                neg_pos_ub=-1, # The upper bound of negative samples based on the
                ↪number of positive samples.
                add_gt_as_proposals=False), # Whether add GT as proposals after
        ↪sampling.

```

(continues on next page)

(continued from previous page)

```

    allowed_border=-1, # The border allowed after padding for valid anchors.
    pos_weight=-1, # The weight of positive samples during training.
    debug=False), # Whether to set the debug mode
    rpn_proposal=dict( # The config to generate proposals during training
        nms_across_levels=False, # Whether to do NMS for boxes across levels. Only
        ↪work in `GARPHead`, naive rpn does not support do nms cross levels.
        nms_pre=2000, # The number of boxes before NMS
        nms_post=1000, # The number of boxes to be kept by NMS. Only work in
        ↪`GARPHead`.
        max_per_img=1000, # The number of boxes to be kept after NMS.
        nms=dict( # Config of NMS
            type='nms', # Type of NMS
            iou_threshold=0.7 # NMS threshold
        ),
        min_bbox_size=0), # The allowed minimal box size
    rcnn=dict( # The config for the roi heads.
        assigner=dict( # Config of assigner for second stage, this is different for
        ↪that in rpn
            type='MaxIoUAssigner', # Type of assigner, MaxIoUAssigner is used for
        ↪all roi_heads for now. Refer to https://github.com/open-mmlab/mmdetection/blob/main/
        ↪mmdet/models/task_modules/assigners/max_iou_assigner.py#L14 for more details.
            pos_iou_thr=0.5, # IoU >= threshold 0.5 will be taken as positive
        ↪samples
            neg_iou_thr=0.5, # IoU < threshold 0.5 will be taken as negative samples
            min_pos_iou=0.5, # The minimal IoU threshold to take boxes as positive
        ↪samples
            match_low_quality=False, # Whether to match the boxes under low quality
        ↪(see API doc for more details).
            ignore_iof_thr=-1), # IoF threshold for ignoring bboxes
        sampler=dict(
            type='RandomSampler', # Type of sampler, PseudoSampler and other
        ↪samplers are also supported. Refer to https://github.com/open-mmlab/mmdetection/blob/
        ↪main/mmdet/models/task_modules/samplers/random_sampler.py#L14 for implementation
        ↪details.
            num=512, # Number of samples
            pos_fraction=0.25, # The ratio of positive samples in the total samples.
            neg_pos_ub=-1, # The upper bound of negative samples based on the
        ↪number of positive samples.
            add_gt_as_proposals=True
        ), # Whether add GT as proposals after sampling.
        mask_size=28, # Size of mask
        pos_weight=-1, # The weight of positive samples during training.
        debug=False)), # Whether to set the debug mode
    test_cfg = dict( # Config for testing hyperparameters for rpn and rcnn
        rpn=dict( # The config to generate proposals during testing
            nms_across_levels=False, # Whether to do NMS for boxes across levels. Only
        ↪work in `GARPHead`, naive rpn does not support do nms cross levels.
            nms_pre=1000, # The number of boxes before NMS
            nms_post=1000, # The number of boxes to be kept by NMS. Only work in
        ↪`GARPHead`.
            max_per_img=1000, # The number of boxes to be kept after NMS.
            nms=dict( # Config of NMS

```

(continues on next page)

(continued from previous page)

```

        type='nms', #Type of NMS
        iou_threshold=0.7 # NMS threshold
    ),
    min_bbox_size=0), # The allowed minimal box size
    rcnn=dict( # The config for the roi heads.
        score_thr=0.05, # Threshold to filter out boxes
        nms=dict( # Config of NMS in the second stage
            type='nms', # Type of NMS
            iou_thr=0.5), # NMS threshold
        max_per_img=100, # Max number of detections of each image
        mask_thr_binary=0.5))) # Threshold of mask prediction

```

### Dataset and evaluator config

`Dataloaders` are required for the training, validation, and testing of the `runner`. Dataset and data pipeline need to be set to build the dataloader. Due to the complexity of this part, we use intermediate variables to simplify the writing of dataloader configs.

```

dataset_type = 'CocoDataset' # Dataset type, this will be used to define the dataset
data_root = 'data/coco/' # Root path of data
backend_args = None # Arguments to instantiate the corresponding file backend

train_pipeline = [ # Training data processing pipeline
    dict(type='LoadImageFromFile', backend_args=backend_args), # First pipeline to load
    ↪ images from file path
    dict(
        type='LoadAnnotations', # Second pipeline to load annotations for current image
        with_bbox=True, # Whether to use bounding box, True for detection
        with_mask=True, # Whether to use instance mask, True for instance segmentation
        poly2mask=True), # Whether to convert the polygon mask to instance mask, set
    ↪ False for acceleration and to save memory
    dict(
        type='Resize', # Pipeline that resizes the images and their annotations
        scale=(1333, 800), # The largest scale of the images
        keep_ratio=True # Whether to keep the ratio between height and width
    ),
    dict(
        type='RandomFlip', # Augmentation pipeline that flips the images and their
    ↪ annotations
        prob=0.5), # The probability to flip
    dict(type='PackDetInputs') # Pipeline that formats the annotation data and decides
    ↪ which keys in the data should be packed into data_samples
]
test_pipeline = [ # Testing data processing pipeline
    dict(type='LoadImageFromFile', backend_args=backend_args), # First pipeline to load
    ↪ images from file path
    dict(type='Resize', scale=(1333, 800), keep_ratio=True), # Pipeline that resizes
    ↪ the images
    dict(
        type='PackDetInputs', # Pipeline that formats the annotation data and decides
    ↪ which keys in the data should be packed into data_samples

```

(continues on next page)

(continued from previous page)

```

        meta_keys=('img_id', 'img_path', 'ori_shape', 'img_shape',
                    'scale_factor'))
    ]
    train_dataloader = dict( # Train dataloader config
        batch_size=2, # Batch size of a single GPU
        num_workers=2, # Worker to pre-fetch data for each single GPU
        persistent_workers=True, # If ``True``, the dataloader will not shut down the worker_
        ↪ processes after an epoch end, which can accelerate training speed.
        sampler=dict( # training data sampler
            type='DefaultSampler', # DefaultSampler which supports both distributed and non-
            ↪ distributed training. Refer to https://mmdengine.readthedocs.io/en/latest/api/generated/
            ↪ mmdengine.dataset.DefaultSampler.html#mmdengine.dataset.DefaultSampler
            shuffle=True), # randomly shuffle the training data in each epoch
        batch_sampler=dict(type='AspectRatioBatchSampler'), # Batch sampler for grouping_
        ↪ images with similar aspect ratio into a same batch. It can reduce GPU memory cost.
        dataset=dict( # Train dataset config
            type=dataset_type,
            data_root=data_root,
            ann_file='annotations/instances_train2017.json', # Path of annotation file
            data_prefix=dict(img='train2017/'), # Prefix of image path
            filter_cfg=dict(filter_empty_gt=True, min_size=32), # Config of filtering_
            ↪ images and annotations
            pipeline=train_pipeline,
            backend_args=backend_args))
    val_dataloader = dict( # Validation dataloader config
        batch_size=1, # Batch size of a single GPU. If batch-size > 1, the extra padding_
        ↪ area may influence the performance.
        num_workers=2, # Worker to pre-fetch data for each single GPU
        persistent_workers=True, # If ``True``, the dataloader will not shut down the worker_
        ↪ processes after an epoch end, which can accelerate training speed.
        drop_last=False, # Whether to drop the last incomplete batch, if the dataset size_
        ↪ is not divisible by the batch size
        sampler=dict(
            type='DefaultSampler',
            shuffle=False), # not shuffle during validation and testing
        dataset=dict(
            type=dataset_type,
            data_root=data_root,
            ann_file='annotations/instances_val2017.json',
            data_prefix=dict(img='val2017/'),
            test_mode=True, # Turn on the test mode of the dataset to avoid filtering_
            ↪ annotations or images
            pipeline=test_pipeline,
            backend_args=backend_args))
    test_dataloader = val_dataloader # Testing dataloader config

```

Evaluators are used to compute the metrics of the trained model on the validation and testing datasets. The config of evaluators consists of one or a list of metric configs:

```

val_evaluator = dict( # Validation evaluator config
    type='CocoMetric', # The coco metric used to evaluate AR, AP, and mAP for detection_
    ↪ and instance segmentation

```

(continues on next page)

(continued from previous page)

```

ann_file=data_root + 'annotations/instances_val2017.json', # Annotation file path
metric=['bbox', 'segm'], # Metrics to be evaluated, `bbox` for detection and `segm`
↪for instance segmentation
format_only=False,
backend_args=backend_args)
test_evaluator = val_evaluator # Testing evaluator config

```

Since the test dataset has no annotation files, the test\_dataloader and test\_evaluator config in MMDetection are generally equal to the val's. If you want to save the detection results on the test dataset, you can write the config like this:

```

# inference on test dataset and
# format the output results for submission.
test_dataloader = dict(
    batch_size=1,
    num_workers=2,
    persistent_workers=True,
    drop_last=False,
    sampler=dict(type='DefaultSampler', shuffle=False),
    dataset=dict(
        type=dataset_type,
        data_root=data_root,
        ann_file=data_root + 'annotations/image_info_test-dev2017.json',
        data_prefix=dict(img='test2017/'),
        test_mode=True,
        pipeline=test_pipeline))
test_evaluator = dict(
    type='CocoMetric',
    ann_file=data_root + 'annotations/image_info_test-dev2017.json',
    metric=['bbox', 'segm'], # Metrics to be evaluated
    format_only=True, # Only format and save the results to coco json file
    outfile_prefix='./work_dirs/coco_detection/test') # The prefix of output json files

```

## Training and testing config

MMEngine's runner uses Loop to control the training, validation, and testing processes. Users can set the maximum training epochs and validation intervals with these fields.

```

train_cfg = dict(
    type='EpochBasedTrainLoop', # The training loop type. Refer to https://github.com/
↪open-mmlab/mmdetection/blob/main/mmdetection/runner/loops.py
    max_epochs=12, # Maximum training epochs
    val_interval=1) # Validation intervals. Run validation every epoch.
val_cfg = dict(type='ValLoop') # The validation loop type
test_cfg = dict(type='TestLoop') # The testing loop type

```

## Optimization config

`optim_wrapper` is the field to configure optimization-related settings. The optimizer wrapper not only provides the functions of the optimizer, but also supports functions such as gradient clipping, mixed precision training, etc. Find more in [optimizer wrapper tutorial](#).

```
optim_wrapper = dict( # Optimizer wrapper config
    type='OptimWrapper', # Optimizer wrapper type, switch to AmpOptimWrapper to enable
    ↪mixed precision training.
    optimizer=dict( # Optimizer config. Support all kinds of optimizers in PyTorch.
    ↪Refer to https://pytorch.org/docs/stable/optim.html#algorithms
        type='SGD', # Stochastic gradient descent optimizer
        lr=0.02, # The base learning rate
        momentum=0.9, # Stochastic gradient descent with momentum
        weight_decay=0.0001), # Weight decay of SGD
    clip_grad=None, # Gradient clip option. Set None to disable gradient clip. Find
    ↪usage in https://mengine.readthedocs.io/en/latest/tutorials/optimizer.html
)
```

`param_scheduler` is a field that configures methods of adjusting optimization hyperparameters such as learning rate and momentum. Users can combine multiple schedulers to create a desired parameter adjustment strategy. Find more in [parameter scheduler tutorial](#) and [parameter scheduler API documents](#)

```
param_scheduler = [
    # Linear learning rate warm-up scheduler
    dict(
        type='LinearLR', # Use linear policy to warmup learning rate
        start_factor=0.001, # The ratio of the starting learning rate used for warmup
        by_epoch=False, # The warmup learning rate is updated by iteration
        begin=0, # Start from the first iteration
        end=500), # End the warmup at the 500th iteration
    # The main LRScheduler
    dict(
        type='MultiStepLR', # Use multi-step learning rate policy during training
        by_epoch=True, # The learning rate is updated by epoch
        begin=0, # Start from the first epoch
        end=12, # End at the 12th epoch
        milestones=[8, 11], # Epochs to decay the learning rate
        gamma=0.1) # The learning rate decay ratio
]
```

## Hook config

Users can attach Hooks to training, validation, and testing loops to insert some operations during running. There are two different hook fields, one is `default_hooks` and the other is `custom_hooks`.

`default_hooks` is a dict of hook configs, and they are the hooks must be required at the runtime. They have default priority which should not be modified. If not set, runner will use the default values. To disable a default hook, users can set its config to `None`. Find more in [HOOK](#).

```
default_hooks = dict(
    timer=dict(type='IterTimerHook'), # Update the time spent during iteration into
    ↪message hub
```

(continues on next page)

(continued from previous page)

```

logger=dict(type='LoggerHook', interval=50), # Collect logs from different
↳ components of Runner and write them to terminal, JSON file, tensorboard and wandb .etc
param_scheduler=dict(type='ParamSchedulerHook'), # update some hyper-parameters of
↳ optimizer
checkpoint=dict(type='CheckpointHook', interval=1), # Save checkpoints periodically
sampler_seed=dict(type='DistSamplerSeedHook'), # Ensure distributed Sampler shuffle
↳ is active
visualization=dict(type='DetVisualizationHook')) # Detection Visualization Hook.
↳ Used to visualize validation and testing process prediction results

```

custom\_hooks is a list of all other hook configs. Users can develop their own hooks and insert them in this field.

```
custom_hooks = []
```

## Runtime config

```

default_scope = 'mmdet' # The default registry scope to find modules. Refer to https://
↳ mmengine.readthedocs.io/en/latest/advanced_tutorials/registry.html

env_cfg = dict(
    cudnn_benchmark=False, # Whether to enable cudnn benchmark
    mp_cfg=dict( # Multi-processing config
        mp_start_method='fork', # Use fork to start multi-processing threads. 'fork'
↳ usually faster than 'spawn' but maybe unsafe. See discussion in https://github.com/
↳ pytorch/pytorch/issues/1355
        opencv_num_threads=0), # Disable opencv multi-threads to avoid system being
↳ overloaded
    dist_cfg=dict(backend='nccl'), # Distribution configs
)

vis_backends = [dict(type='LocalVisBackend')] # Visualization backends. Refer to https://
↳ mmengine.readthedocs.io/en/latest/advanced_tutorials/visualization.html
visualizer = dict(
    type='DetLocalVisualizer', vis_backends=vis_backends, name='visualizer')
log_processor = dict(
    type='LogProcessor', # Log processor to process runtime logs
    window_size=50, # Smooth interval of log values
    by_epoch=True) # Whether to format logs with epoch type. Should be consistent with
↳ the train loop's type.

log_level = 'INFO' # The level of logging.
load_from = None # Load model checkpoint as a pre-trained model from a given path. This
↳ will not resume training.
resume = False # Whether to resume from the checkpoint defined in `load_from`. If `load_
↳ from` is None, it will resume the latest checkpoint in the `work_dir`.

```

### 3.1.2 Iter-based config

MMEngine's Runner also provides an iter-based training loop except for epoch-based. To use iter-based training, users should modify the `train_cfg`, `param_scheduler`, `train_dataloader`, `default_hooks`, and `log_processor`. Here is an example of changing an epoch-based RetinaNet config to iter-based: `configs/retinanet/retinanet_r50_fpn_90k_coco.py`

```
# Iter-based training config
train_cfg = dict(
    _delete=True, # Ignore the base config setting (optional)
    type='IterBasedTrainLoop', # Use iter-based training loop
    max_iters=90000, # Maximum iterations
    val_interval=10000) # Validation interval

# Change the scheduler to iter-based
param_scheduler = [
    dict(
        type='LinearLR', start_factor=0.001, by_epoch=False, begin=0, end=500),
    dict(
        type='MultiStepLR',
        begin=0,
        end=90000,
        by_epoch=False,
        milestones=[60000, 80000],
        gamma=0.1)
]

# Switch to InfiniteSampler to avoid dataloader restart
train_dataloader = dict(sampler=dict(type='InfiniteSampler'))

# Change the checkpoint saving interval to iter-based
default_hooks = dict(checkpoint=dict(by_epoch=False, interval=10000))

# Change the log format to iter-based
log_processor = dict(by_epoch=False)
```

### 3.1.3 Config file inheritance

There are 4 basic component types under `config/_base_`, `dataset`, `model`, `schedule`, `default_runtime`. Many methods could be easily constructed with one of these models like Faster R-CNN, Mask R-CNN, Cascade R-CNN, RPN, SSD. The configs that are composed by components from `_base_` are called the *primitive*.

For all configs under the same folder, it is recommended to have only **one** *primitive* config. All other configs should inherit from the *primitive* config. In this way, the maximum of inheritance level is 3.

For easy understanding, we recommend contributors to inherit from existing methods. For example, if some modification is made based on Faster R-CNN, users may first inherit the basic Faster R-CNN structure by specifying `_base_ = ../faster_rcnn/faster-rcnn_r50_fpn_1x_coco.py`, then modify the necessary fields in the config files.

If you are building an entirely new method that does not share the structure with any of the existing methods, you may create a folder `xxx_rcnn` under `configs`,

Please refer to [mmengine config tutorial](#) for detailed documentation.

By setting the `_base_` field, we can set which files the current configuration file inherits from.

When `_base_` is a string of a file path, it means inheriting the contents from one config file.

```
_base_ = './mask-rcnn_r50_fpn_1x_coco.py'
```

When `_base_` is a list of multiple file paths, it means inheriting from multiple files.

```
_base_ = [
    '../_base_/models/mask-rcnn_r50_fpn.py',
    '../_base_/datasets/coco_instance.py',
    '../_base_/schedules/schedule_1x.py', '../_base_/default_runtime.py'
]
```

If you wish to inspect the config file, you may run `python tools/misc/print_config.py /PATH/TO/CONFIG` to see the complete config.

### Ignore some fields in the base configs

Sometimes, you may set `_delete_=True` to ignore some of the fields in base configs. You may refer to [mmdetection config tutorial](#) for a simple illustration.

In MMDetection, for example, to change the backbone of Mask R-CNN with the following config.

```
model = dict(
    type='MaskRCNN',
    backbone=dict(
        type='ResNet',
        depth=50,
        num_stages=4,
        out_indices=(0, 1, 2, 3),
        frozen_stages=1,
        norm_cfg=dict(type='BN', requires_grad=True),
        norm_eval=True,
        style='pytorch',
        init_cfg=dict(type='Pretrained', checkpoint='torchvision://resnet50')),
    neck=dict(...),
    rpn_head=dict(...),
    roi_head=dict(...))
```

ResNet and HRNet use different keywords to construct.

```
_base_ = '../mask_rcnn/mask-rcnn_r50_fpn_1x_coco.py'
model = dict(
    backbone=dict(
        _delete_=True,
        type='HRNet',
        extra=dict(
            stage1=dict(
                num_modules=1,
                num_branches=1,
                block='BOTTLENECK',
                num_blocks=(4, ),
                num_channels=(64, )),
```

(continues on next page)

(continued from previous page)

```

stage2=dict(
    num_modules=1,
    num_branches=2,
    block='BASIC',
    num_blocks=(4, 4),
    num_channels=(32, 64)),
stage3=dict(
    num_modules=4,
    num_branches=3,
    block='BASIC',
    num_blocks=(4, 4, 4),
    num_channels=(32, 64, 128)),
stage4=dict(
    num_modules=3,
    num_branches=4,
    block='BASIC',
    num_blocks=(4, 4, 4, 4),
    num_channels=(32, 64, 128, 256)),
init_cfg=dict(type='Pretrained', checkpoint='open-mmlab://msra/hrnetv2_w32'),
neck=dict(...))

```

The `_delete_=True` would replace all old keys in backbone field with new keys.

### Use intermediate variables in configs

Some intermediate variables are used in the configs files, like `train_pipeline/test_pipeline` in datasets. It's worth noting that when modifying intermediate variables in the children configs, users need to pass the intermediate variables into corresponding fields again. For example, we would like to use a multi-scale strategy to train a Mask R-CNN. `train_pipeline/test_pipeline` are intermediate variables we would like to modify.

```

_base_ = './mask-rcnn_r50_fpn_1x_coco.py'

train_pipeline = [
    dict(type='LoadImageFromFile'),
    dict(type='LoadAnnotations', with_bbox=True, with_mask=True),
    dict(
        type='RandomResize', scale=[(1333, 640), (1333, 800)],
        keep_ratio=True),
    dict(type='RandomFlip', prob=0.5),
    dict(type='PackDetInputs')
]
test_pipeline = [
    dict(type='LoadImageFromFile'),
    dict(type='Resize', scale=(1333, 800), keep_ratio=True),
    dict(
        type='PackDetInputs',
        meta_keys=('img_id', 'img_path', 'ori_shape', 'img_shape',
                  'scale_factor'))
]
train_dataloader = dict(dataset=dict(pipeline=train_pipeline))
val_dataloader = dict(dataset=dict(pipeline=test_pipeline))
test_dataloader = dict(dataset=dict(pipeline=test_pipeline))

```

We first define the new `train_pipeline/test_pipeline` and pass them into dataloader fields.

Similarly, if we would like to switch from SyncBN to BN or MMSyncBN, we need to substitute every `norm_cfg` in the config.

```
_base_ = './mask-rcnn_r50_fpn_1x_coco.py'
norm_cfg = dict(type='BN', requires_grad=True)
model = dict(
    backbone=dict(norm_cfg=norm_cfg),
    neck=dict(norm_cfg=norm_cfg),
    ...)
```

### Reuse variables in `_base_` file

If the users want to reuse the variables in the base file, they can get a copy of the corresponding variable by using `{{_base_.xxx}}`. E.g:

```
_base_ = './mask-rcnn_r50_fpn_1x_coco.py'

a = {{_base_.model}} # Variable `a` is equal to the `model` defined in `_base_`
```

## 3.1.4 Modify config through script arguments

When submitting jobs using `tools/train.py` or `tools/test.py`, you may specify `--cfg-options` to in-place modify the config.

- Update config keys of dict chains.

The config options can be specified following the order of the dict keys in the original config. For example, `--cfg-options model.backbone.norm_eval=False` changes the all BN modules in model backbones to train mode.

- Update keys inside a list of configs.

Some config dicts are composed as a list in your config. For example, the training pipeline `train_dataloader.dataset.pipeline` is normally a list e.g. `[dict(type='LoadImageFromFile'), ...]`. If you want to change 'LoadImageFromFile' to 'LoadImageFromNDArray' in the pipeline, you may specify `--cfg-options data.train.pipeline.0.type=LoadImageFromNDArray`.

- Update values of list/tuples.

If the value to be updated is a list or a tuple. For example, the config file normally sets `model.data_preprocessor.mean=[123.675, 116.28, 103.53]`. If you want to change the mean values, you may specify `--cfg-options model.data_preprocessor.mean="[127,127,127]"`. Note that the quotation mark " is necessary to support list/tuple data types, and **NO** white space is allowed inside the quotation marks in the specified value.

### 3.1.5 Config name style

We follow the below style to name config files. Contributors are advised to follow the same style.

```
{algorithm name}_{model component names [component1]_[component2]_[...] }_{training_
↪ settings}_{training dataset information}_{testing dataset information}.py
```

The file name is divided into five parts. All parts and components are connected with `_` and words of each part or component should be connected with `-`.

- `{algorithm name}`: The name of the algorithm. It can be a detector name such as `faster-rcnn`, `mask-rcnn`, etc. Or can be a semi-supervised or knowledge-distillation algorithm such as `soft-teacher`, `lad`. etc.
- `{model component names}`: Names of the components used in the algorithm such as backbone, neck, etc. For example, `r50-caffe_fpn_gn-head` means using caffe-style ResNet50, FPN and detection head with Group Norm in the algorithm.
- `{training settings}`: Information of training settings such as batch size, augmentations, loss trick, scheduler, and epochs/iterations. For example: `4xb4-mixup-giou-coslr-100e` means using 8-gpus x 4-images-per-gpu, mixup augmentation, GIoU loss, cosine annealing learning rate, and train 100 epochs. Some abbreviations:
  - `{gpu x batch_per_gpu}`: GPUs and samples per GPU. `bN` indicates `N` batch size per GPU. E.g. `4xb4` is the short term of 4-GPUs x 4-images-per-GPU. And `8xb2` is used by default if not mentioned.
  - `{schedule}`: training schedule, options are `1x`, `2x`, `20e`, etc. `1x` and `2x` means 12 epochs and 24 epochs respectively. `20e` is adopted in cascade models, which denotes 20 epochs. For `1x/2x`, the initial learning rate decays by a factor of 10 at the 8/16th and 11/22th epochs. For `20e`, the initial learning rate decays by a factor of 10 at the 16th and 19th epochs.
- `{training dataset information}`: Training dataset names like `coco`, `coco-panoptic`, `cityscapes`, `voc-0712`, `wider-face`.
- `{testing dataset information}` (optional): Testing dataset name for models trained on one dataset but tested on another. If not mentioned, it means the model was trained and tested on the same dataset type.

## 3.2 Inference with existing models

MMDetection provides hundreds of pre-trained detection models in [Model Zoo](#). This note will show how to inference, which means using trained models to detect objects on images.

In MMDetection, a model is defined by a [configuration file](#) and existing model parameters are saved in a checkpoint file.

To start with, we recommend [RTMDet](#) with this [configuration file](#) and this [checkpoint file](#). It is recommended to download the checkpoint file to `checkpoints` directory.

### 3.2.1 High-level APIs for inference

MMDetection provides high-level Python APIs for inference on images. Here is an example of building the model and inference on given images or videos.

```
import cv2
import mmcv
from mmcv.transforms import Compose
from mmengine.utils import track_iter_progress
```

(continues on next page)

(continued from previous page)

```

from mmdet.registry import VISUALIZERS
from mmdet.apis import init_detector, inference_detector

# Specify the path to model config and checkpoint file
config_file = 'configs/rtmdet/rtmdet_l_8xb32-300e_coco.py'
checkpoint_file = 'checkpoints/rtmdet_l_8xb32-300e_coco_20220719_112030-5a0be7c4.pth'

# Build the model from a config file and a checkpoint file
model = init_detector(config_file, checkpoint_file, device='cuda:0')

# Init visualizer
visualizer = VISUALIZERS.build(model.cfg.visualizer)
# The dataset_meta is loaded from the checkpoint and
# then pass to the model in init_detector
visualizer.dataset_meta = model.dataset_meta

# Test a single image and show the results
img = 'test.jpg' # or img = mmcv.imread(img), which will only load it once
result = inference_detector(model, img)

# Show the results
img = mmcv.imread(img)
img = mmcv.imconvert(img, 'bgr', 'rgb')

visualizer.add_datasample(
    'result',
    img,
    data_sample=result,
    draw_gt=False,
    show=True)

# Test a video and show the results
# Build test pipeline
model.cfg.test_dataloader.dataset.pipeline[0].type = 'LoadImageFromNDArray'
test_pipeline = Compose(model.cfg.test_dataloader.dataset.pipeline)

# visualizer has been created in line 31 and 34, if you run this demo in one notebook,
# you need not build the visualizer again.

# Init visualizer
visualizer = VISUALIZERS.build(model.cfg.visualizer)
# The dataset_meta is loaded from the checkpoint and
# then pass to the model in init_detector
visualizer.dataset_meta = model.dataset_meta

# The interval of show (ms), 0 is block
wait_time = 1

video_reader = mmcv.VideoReader('video.mp4')

```

(continues on next page)

(continued from previous page)

```

cv2.namedWindow('video', 0)

for frame in track_iter_progress(video_reader):
    result = inference_detector(model, frame, test_pipeline=test_pipeline)
    visualizer.add_datasample(
        name='video',
        image=frame,
        data_sample=result,
        draw_gt=False,
        show=False)
    frame = visualizer.get_image()
    mmcv.imshow(frame, 'video', wait_time)

cv2.destroyAllWindows()

```

A notebook demo can be found in [demo/inference\\_demo.ipynb](#).

Note: `inference_detector` only supports single-image inference for now.

### 3.2.2 Demos

We also provide three demo scripts, implemented with high-level APIs and supporting functionality codes. Source codes are available [here](#).

#### Image demo

This script performs inference on a single image.

```

python demo/image_demo.py \
    ${IMAGE_FILE} \
    ${CONFIG_FILE} \
    [--weights ${WEIGHTS}] \
    [--device ${GPU_ID}] \
    [--pred-score-thr ${SCORE_THR}]

```

Examples:

```

python demo/image_demo.py demo/demo.jpg \
    configs/rtdet/rtdet_l_8xb32-300e_coco.py \
    --weights checkpoints/rtdet_l_8xb32-300e_coco_20220719_112030-5a0be7c4.pth \
    --device cpu

```

## Webcam demo

This is a live demo from a webcam.

```
python demo/webcam_demo.py \  
    ${CONFIG_FILE} \  
    ${CHECKPOINT_FILE} \  
    [--device ${GPU_ID}] \  
    [--camera-id ${CAMERA_ID}] \  
    [--score-thr ${SCORE_THR}]
```

Examples:

```
python demo/webcam_demo.py \  
    configs/rtdet/rtdet_l_8xb32-300e_coco.py \  
    checkpoints/rtdet_l_8xb32-300e_coco_20220719_112030-5a0be7c4.pth
```

## Video demo

This script performs inference on a video.

```
python demo/video_demo.py \  
    ${VIDEO_FILE} \  
    ${CONFIG_FILE} \  
    ${CHECKPOINT_FILE} \  
    [--device ${GPU_ID}] \  
    [--score-thr ${SCORE_THR}] \  
    [--out ${OUT_FILE}] \  
    [--show] \  
    [--wait-time ${WAIT_TIME}]
```

Examples:

```
python demo/video_demo.py demo/demo.mp4 \  
    configs/rtdet/rtdet_l_8xb32-300e_coco.py \  
    checkpoints/rtdet_l_8xb32-300e_coco_20220719_112030-5a0be7c4.pth \  
    --out result.mp4
```

## Video demo with GPU acceleration

This script performs inference on a video with GPU acceleration.

```
python demo/video_gpuaccel_demo.py \  
    ${VIDEO_FILE} \  
    ${CONFIG_FILE} \  
    ${CHECKPOINT_FILE} \  
    [--device ${GPU_ID}] \  
    [--score-thr ${SCORE_THR}] \  
    [--nvdecode] \  
    [--out ${OUT_FILE}] \  
    [--show] \  
    [--wait-time ${WAIT_TIME}]
```

Examples:

```
python demo/video_gpuaccel_demo.py demo/demo.mp4 \
    configs/rtdet/rtdet_l_8xb32-300e_coco.py \
    checkpoints/rtdet_l_8xb32-300e_coco_20220719_112030-5a0be7c4.pth \
    --nvdecode --out result.mp4
```

### 3.3 Dataset Prepare

MMDetection supports multiple public datasets including COCO, Pascal VOC, CityScapes, and more.

Public datasets like [Pascal VOC](#) or [mirror](#) and [COCO](#) are available from official websites or mirrors. Note: In the detection task, Pascal VOC 2012 is an extension of Pascal VOC 2007 without overlap, and we usually use them together. It is recommended to download and extract the dataset somewhere outside the project directory and symlink the dataset root to \$MMDetection/data as below. If your folder structure is different, you may need to change the corresponding paths in config files.

We provide a script to download datasets such as COCO, you can run `python tools/misc/download_dataset.py --dataset-name coco2017` to download COCO dataset. For users in China, more datasets can be downloaded from the opensource dataset platform: [OpenDataLab](#).

For more usage please refer to [dataset-download](#)

```
mmdetection
├── mmdet
├── tools
├── configs
├── data
│   ├── coco
│   │   ├── annotations
│   │   ├── train2017
│   │   ├── val2017
│   │   └── test2017
│   ├── cityscapes
│   │   ├── annotations
│   │   ├── leftImg8bit
│   │   │   ├── train
│   │   │   └── val
│   │   ├── gtFine
│   │   │   ├── train
│   │   │   └── val
│   ├── VOCdevkit
│   │   ├── VOC2007
│   │   └── VOC2012
```

Some models require additional [COCO-stuff](#) datasets, such as HTC, DetectoRS and SCNet, you can download, unzip, and then move them to the coco folder. The directory should be like this.


```
mmdetection
├── data
│   └── coco
│       ├── annotations
│       └── train2017
```

(continues on next page)

(continued from previous page)



Panoptic segmentation models like PanopticFPN require additional [COCO Panoptic](#) datasets, you can download, unzip, and then move them to the coco annotation folder. The directory should be like this.

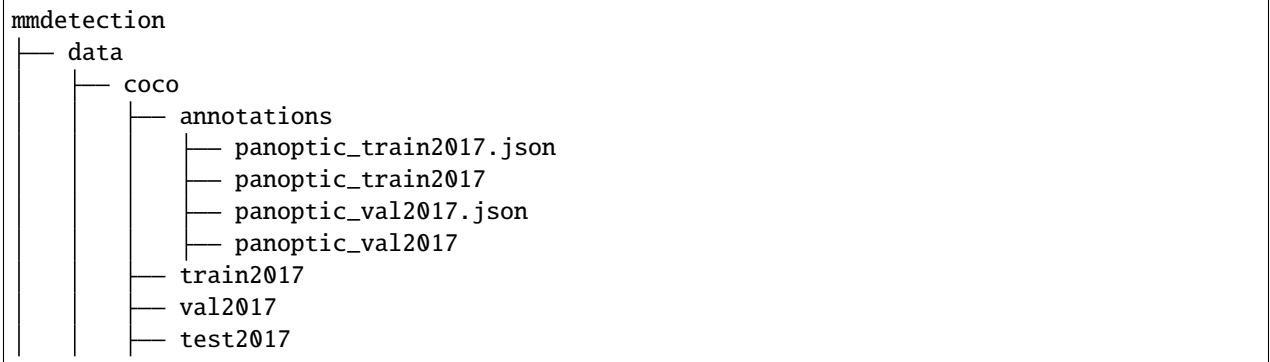

The `citiscapes` annotations need to be converted into the coco format using `tools/dataset_converters/citiscapes.py`:

```
pip install cityscapesscripts

python tools/dataset_converters/cityscapes.py \
    ./data/cityscapes \
    --nproc 8 \
    --out-dir ./data/cityscapes/annotations
```

### 3.4 Test existing models on standard datasets

To evaluate a model’s accuracy, one usually tests the model on some standard datasets, please refer to [dataset prepare guide](#) to prepare the dataset.

This section will show how to test existing models on supported datasets.

### 3.4.1 Test existing models

We provide testing scripts for evaluating an existing model on the whole dataset (COCO, PASCAL VOC, Cityscapes, etc.). The following testing environments are supported:

- single GPU
- CPU
- single node multiple GPUs
- multiple nodes

Choose the proper script to perform testing depending on the testing environment.

```
# Single-gpu testing
python tools/test.py \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    [--out ${RESULT_FILE}] \
    [--show]

# CPU: disable GPUs and run single-gpu testing script
export CUDA_VISIBLE_DEVICES=-1
python tools/test.py \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    [--out ${RESULT_FILE}] \
    [--show]

# Multi-gpu testing
bash tools/dist_test.sh \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    ${GPU_NUM} \
    [--out ${RESULT_FILE}]
```

`tools/dist_test.sh` also supports multi-node testing, but relies on PyTorch's [launch utility](#).

Optional arguments:

- `RESULT_FILE`: Filename of the output results in pickle format. If not specified, the results will not be saved to a file.
- `--show`: If specified, detection results will be plotted on the images and shown in a new window. It is only applicable to single GPU testing and used for debugging and visualization. Please make sure that GUI is available in your environment. Otherwise, you may encounter an error like `cannot connect to X server`.
- `--show-dir`: If specified, detection results will be plotted on the images and saved to the specified directory. It is only applicable to single GPU testing and used for debugging and visualization. You do NOT need a GUI available in your environment for using this option.
- `--work-dir`: If specified, detection results containing evaluation metrics will be saved to the specified directory.
- `--cfg-options`: If specified, the key-value pair optional `cfg` will be merged into config file

### 3.4.2 Examples

Assuming that you have already downloaded the checkpoints to the directory `checkpoints/`.

1. Test RTMDet and visualize the results. Press any key for the next image. Config and checkpoint files are available [here](#).

```
python tools/test.py \
    configs/rtdet/rtdet_l_8xb32-300e_coco.py \
    checkpoints/rtdet_l_8xb32-300e_coco_20220719_112030-5a0be7c4.pth \
    --show
```

2. Test RTMDet and save the painted images for future visualization. Config and checkpoint files are available [here](#).

```
python tools/test.py \
  configs/rtdet/rtdet_l_8xb32-300e_coco.py \
  checkpoints/rtdet_l_8xb32-300e_coco_20220719_112030-5a0be7c4.pth \
  --show-dir faster_rcnn_r50_fpn_1x_results
```

3. Test Faster R-CNN on PASCAL VOC (without saving the test results). Config and checkpoint files are available [here](#).

```
python tools/test.py \
  configs/pascal_voc/faster-rcnn_r50_fpn_1x_voc0712.py \
  checkpoints/faster_rcnn_r50_fpn_1x_voc0712_20200624-c9895d40.pth
```

4. Test Mask R-CNN with 8 GPUs, and evaluate. Config and checkpoint files are available [here](#).

```
./tools/dist_test.sh \
  configs/mask-rcnn_r50_fpn_1x_coco.py \
  checkpoints/mask_rcnn_r50_fpn_1x_coco_20200205-d4b0c5d6.pth \
  8 \
  --out results.pkl
```

5. Test Mask R-CNN with 8 GPUs, and evaluate the metric **class-wise**. Config and checkpoint files are available [here](#).

```
./tools/dist_test.sh \
  configs/mask_rcnn/mask-rcnn_r50_fpn_1x_coco.py \
  checkpoints/mask_rcnn_r50_fpn_1x_coco_20200205-d4b0c5d6.pth \
  8 \
  --out results.pkl \
  --cfg-options test_evaluator.classwise=True
```

6. Test Mask R-CNN on COCO test-dev with 8 GPUs, and generate JSON files for submitting to the official evaluation server. Config and checkpoint files are available [here](#).

Replace the original `test_evaluator` and `test_dataloader` with `test_evaluator` and `test_dataloader` in the comment in config and run:

```
./tools/dist_test.sh \
  configs/mask_rcnn/mask-rcnn_r50_fpn_1x_coco.py \
  checkpoints/mask_rcnn_r50_fpn_1x_coco_20200205-d4b0c5d6.pth \
  8
```

This command generates two JSON files `./work_dirs/coco_instance/test.bbox.json` and `./work_dirs/coco_instance/test.segm.json`.

7. Test Mask R-CNN on Cityscapes test with 8 GPUs, and generate txt and png files for submitting to the official evaluation server. Config and checkpoint files are available [here](#).

Replace the original `test_evaluator` and `test_dataloader` with `test_evaluator` and `test_dataloader` in the comment in config and run:

```
./tools/dist_test.sh \
  configs/cityscapes/mask-rcnn_r50_fpn_1x_cityscapes.py \
  checkpoints/mask_rcnn_r50_fpn_1x_cityscapes_20200227-afe51d5a.pth \
  8
```

The generated png and txt would be under `./work_dirs/cityscapes_metric/` directory.

### 3.4.3 Test without Ground Truth Annotations

MMDetection supports to test models without ground-truth annotations using `CocoDataset`. If your dataset format is not in COCO format, please convert them to COCO format. For example, if your dataset format is VOC, you can directly convert it to COCO format by the script in tools. If your dataset format is Cityscapes, you can directly convert it to COCO format by the script in tools. The rest of the formats can be converted using this script.

```
python tools/dataset_converters/images2coco.py \
    ${IMG_PATH} \
    ${CLASSES} \
    ${OUT} \
    [--exclude-extensions]
```

arguments

- `IMG_PATH`: The root path of images.
- `CLASSES`: The text file with a list of categories.
- `OUT`: The output annotation json file name. The save dir is in the same directory as `IMG_PATH`.
- `exclude-extensions`: The suffix of images to be excluded, such as 'png' and 'bmp'.

After the conversion is complete, you need to replace the original `test_evaluator` and `test_dataloader` with `test_evaluator` and `test_dataloader` in the comment in config (find which dataset in 'configs/base/datasets' the current config corresponds to) and run:

```
# Single-gpu testing
python tools/test.py \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    [--show]

# CPU: disable GPUs and run single-gpu testing script
export CUDA_VISIBLE_DEVICES=-1
python tools/test.py \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    [--out ${RESULT_FILE}] \
    [--show]

# Multi-gpu testing
bash tools/dist_test.sh \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    ${GPU_NUM} \
    [--show]
```

Assuming that the checkpoints in the [model zoo](#) have been downloaded to the directory `checkpoints/`, we can test Mask R-CNN on COCO test-dev with 8 GPUs, and generate JSON files using the following command.

```
./tools/dist_test.sh \
    configs/mask_rcnn/mask-rcnn_r50_fpn_1x_coco.py \
    checkpoints/mask_rcnn_r50_fpn_1x_coco_20200205-d4b0c5d6.pth \
    8
```

This command generates two JSON files `./work_dirs/coco_instance/test.bbox.json` and `./work_dirs/coco_instance/test.segm.json`.

### 3.4.4 Batch Inference

MMDetection supports inference with a single image or batched images in test mode. By default, we use single-image inference and you can use batch inference by modifying `samples_per_gpu` in the config of test data. You can do that either by modifying the config as below.

```
data = dict(train_dataloader=dict(...), val_dataloader=dict(...), test_
↳dataloader=dict(batch_size=2, ...))
```

Or you can set it through `--cfg-options` as `--cfg-options test_dataloader.batch_size=2`

### 3.4.5 Test Time Augmentation (TTA)

Test time augmentation (TTA) is a data augmentation strategy used during the test phase. It applies different augmentations, such as flipping and scaling, to the same image for model inference, and then merges the predictions of each augmented image to obtain more accurate predictions. To make it easier for users to use TTA, MMEEngine provides `BaseTTAModel` class, which allows users to implement different TTA strategies by simply extending the `BaseTTAModel` class according to their needs.

In MMDetection, we provides `DetTTAModel` class, which inherits from `BaseTTAModel`.

#### Use case

Using TTA requires two steps. First, you need to add `tta_model` and `tta_pipeline` in the configuration file:

```
tta_model = dict(
    type='DetTTAModel',
    tta_cfg=dict(nms=dict(
        type='nms',
        iou_threshold=0.5),
        max_per_img=100))

tta_pipeline = [
    dict(type='LoadImageFromFile',
        backend_args=None),
    dict(
        type='TestTimeAug',
        transforms=[
            dict(type='Resize', scale=(1333, 800), keep_ratio=True)
        ], [ # It uses 2 flipping transformations (flipping and not flipping).
            dict(type='RandomFlip', prob=1.),
            dict(type='RandomFlip', prob=0.)
        ], [
            dict(
                type='PackDetInputs',
                meta_keys=('img_id', 'img_path', 'ori_shape',
                    'img_shape', 'scale_factor', 'flip',
                    'flip_direction'))
        ]
    )
]
```

Second, set `--tta` when running the test scripts as examples below:

```
# Single-gpu testing
python tools/test.py \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    [--tta]

# CPU: disable GPUs and run single-gpu testing script
export CUDA_VISIBLE_DEVICES=-1
python tools/test.py \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    [--out ${RESULT_FILE}] \
    [--tta]

# Multi-gpu testing
bash tools/dist_test.sh \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    ${GPU_NUM} \
    [--tta]
```

You can also modify the TTA config by yourself, such as adding scaling enhancement:

```
tta_model = dict(
    type='DetTTAModel',
    tta_cfg=dict(nms=dict(
        type='nms',
        iou_threshold=0.5),
        max_per_img=100))

img_scales = [(1333, 800), (666, 400), (2000, 1200)]
tta_pipeline = [
    dict(type='LoadImageFromFile',
        backend_args=None),
    dict(
        type='TestTimeAug',
        transforms=[
            dict(type='Resize', scale=s, keep_ratio=True) for s in img_scales
        ], [
            dict(type='RandomFlip', prob=1.),
            dict(type='RandomFlip', prob=0.)
        ], [
            dict(
                type='PackDetInputs',
                meta_keys=('img_id', 'img_path', 'ori_shape',
                    'img_shape', 'scale_factor', 'flip',
                    'flip_direction'))
        ]
    )
]
```

The above data augmentation pipeline will first perform 3 multi-scaling transformations on the image, followed by 2 flipping transformations (flipping and not flipping). Finally, the image is packaged into the final result using PackDet-Inputs.

Here are more TTA use cases for your reference:

- RetinaNet
- CenterNet
- YOLOX
- RTMDet

For more advanced usage and data flow of TTA, please refer to [MMEngine](#). We will support instance segmentation TTA latter.

## 3.5 Train predefined models on standard datasets

MMDetection also provides out-of-the-box tools for training detection models. This section will show how to train *predefined* models (under configs) on standard datasets i.e. COCO.

### 3.5.1 Prepare datasets

Training requires preparing datasets too. See section [Prepare datasets](#) above for details.

**Note:** Currently, the config files under `configs/cityscapes` use COCO pre-trained weights to initialize. You could download the existing models in advance if the network connection is unavailable or slow. Otherwise, it would cause errors at the beginning of training.

### 3.5.2 Learning rate auto scaling

**Important:** The default learning rate in config files is for 8 GPUs and 2 sample per GPU (batch size =  $8 * 2 = 16$ ). And it had been set to `auto_scale_lr.base_batch_size` in `config/_base_/schedules/schedule_1x.py`. Learning rate will be automatically scaled base on this value when the batch size is 16. Meanwhile, in order not to affect other codebase which based on mmdet, the flag `auto_scale_lr.enable` is set to `False` by default.

If you want to enable this feature, you need to add argument `--auto-scale-lr`. And you need to check the config name which you want to use before you process the command, because the config name indicates the default batch size. By default, it is  $8 \times 2 = 16$  batch size, like `faster_rcnn_r50_caffe_fpn_90k_coco.py` or `pisa_faster_rcnn_x101_32x4d_fpn_1x_coco.py`. In other cases, you will see the config file name have `_NxM_` in dictating, like `cornernet_hourglass104_mstest_32x3_210e_coco.py` which batch size is  $32 \times 3 = 96$ , or `scnet_x101_64x4d_fpn_8x1_20e_coco.py` which batch size is  $8 \times 1 = 8$ .

**Please remember to check the bottom of the specific config file you want to use, it will have `auto_scale_lr.base_batch_size` if the batch size is not 16. If you can't find those values, check the config file which in `_base_[xxx]` and you will find it. Please do not modify its values if you want to automatically scale the LR.**

The basic usage of learning rate auto scaling is as follows.

```
python tools/train.py \
    ${CONFIG_FILE} \
    --auto-scale-lr \
    [optional arguments]
```

If you enabled this feature, the learning rate will be automatically scaled according to the number of GPUs on the machine and the batch size of training. See [linear scaling rule](#) for details. For example, If there are 4 GPUs and 2 pictures on each GPU,  $lr = 0.01$ , then if there are 16 GPUs and 4 pictures on each GPU, it will automatically scale to  $lr = 0.08$ .

If you don't want to use it, you need to calculate the learning rate according to the [linear scaling rule](#) manually then change `optimizer.lr` in specific config file.

### 3.5.3 Training on a single GPU

We provide `tools/train.py` to launch training jobs on a single GPU. The basic usage is as follows.

```
python tools/train.py \
    ${CONFIG_FILE} \
    [optional arguments]
```

During training, log files and checkpoints will be saved to the working directory, which is specified by `work_dir` in the config file or via CLI argument `--work-dir`.

By default, the model is evaluated on the validation set every epoch, the evaluation interval can be specified in the config file as shown below.

```
# evaluate the model every 12 epochs.
train_cfg = dict(val_interval=12)
```

This tool accepts several optional arguments, including:

- `--work-dir` `${WORK_DIR}`: Override the working directory.
- `--auto-resume`: resume from the latest checkpoint in the `work_dir` automatically.
- `--cfg-options` 'Key=value': Overrides other settings in the used config.

### 3.5.4 Training on CPU

The process of training on the CPU is consistent with single GPU training. We just need to disable GPUs before the training process.

```
export CUDA_VISIBLE_DEVICES=-1
```

And then run the script above.

#### Note:

We do not recommend users to use the CPU for training because it is too slow. We support this feature to allow users to debug on machines without GPU for convenience.

### 3.5.5 Training on multiple GPUs

We provide `tools/dist_train.sh` to launch training on multiple GPUs. The basic usage is as follows.

```
bash ./tools/dist_train.sh \
    ${CONFIG_FILE} \
    ${GPU_NUM} \
    [optional arguments]
```

Optional arguments remain the same as stated above.

## Launch multiple jobs simultaneously

If you would like to launch multiple jobs on a single machine, e.g., 2 jobs of 4-GPU training on a machine with 8 GPUs, you need to specify different ports (29500 by default) for each job to avoid communication conflict.

If you use `dist_train.sh` to launch training jobs, you can set the port in the commands.

```
CUDA_VISIBLE_DEVICES=0,1,2,3 PORT=29500 ./tools/dist_train.sh ${CONFIG_FILE} 4
CUDA_VISIBLE_DEVICES=4,5,6,7 PORT=29501 ./tools/dist_train.sh ${CONFIG_FILE} 4
```

## 3.5.6 Train with multiple machines

If you launch with multiple machines simply connected with ethernet, you can simply run the following commands:

On the first machine:

```
NNODES=2 NODE_RANK=0 PORT=$MASTER_PORT MASTER_ADDR=$MASTER_ADDR sh tools/dist_train.sh
↪ $CONFIG $GPUS
```

On the second machine:

```
NNODES=2 NODE_RANK=1 PORT=$MASTER_PORT MASTER_ADDR=$MASTER_ADDR sh tools/dist_train.sh
↪ $CONFIG $GPUS
```

Usually, it is slow if you do not have high-speed networking like InfiniBand.

## 3.5.7 Manage jobs with Slurm

**Slurm** is a good job scheduling system for computing clusters. On a cluster managed by Slurm, you can use `slurm_train.sh` to spawn training jobs. It supports both single-node and multi-node training.

The basic usage is as follows.

```
[GPUS=${GPUS}] ./tools/slurm_train.sh ${PARTITION} ${JOB_NAME} ${CONFIG_FILE} ${WORK_DIR}
```

Below is an example of using 16 GPUs to train Mask R-CNN on a Slurm partition named *dev*, and set the work-dir to some shared file systems.

```
GPUS=16 ./tools/slurm_train.sh dev mask_r50_1x configs/mask-rcnn_r50_fpn_1x_coco.py /nfs/
↪ xxxx/mask_rcnn_r50_fpn_1x
```

You can check the source code to review full arguments and environment variables.

When using Slurm, the port option needs to be set in one of the following ways:

1. Set the port through `--options`. This is more recommended since it does not change the original configs.

```
CUDA_VISIBLE_DEVICES=0,1,2,3 GPUS=4 ./tools/slurm_train.sh ${PARTITION} ${JOB_NAME} \
↪ config1.py ${WORK_DIR} --options 'dist_params.port=29500'
CUDA_VISIBLE_DEVICES=4,5,6,7 GPUS=4 ./tools/slurm_train.sh ${PARTITION} ${JOB_NAME} \
↪ config2.py ${WORK_DIR} --options 'dist_params.port=29501'
```

2. Modify the config files to set different communication ports.

In `config1.py`, set

```
dist_params = dict(backend='nccl', port=29500)
```

In config2.py, set

```
dist_params = dict(backend='nccl', port=29501)
```

Then you can launch two jobs with config1.py and config2.py.

```
CUDA_VISIBLE_DEVICES=0,1,2,3 GPUS=4 ./tools/slurm_train.sh ${PARTITION} ${JOB_NAME} \
↪ config1.py ${WORK_DIR}
CUDA_VISIBLE_DEVICES=4,5,6,7 GPUS=4 ./tools/slurm_train.sh ${PARTITION} ${JOB_NAME} \
↪ config2.py ${WORK_DIR}
```

## 3.6 Train with customized datasets

In this part, you will know how to train predefined models with customized datasets and then test it. We use the [balloon dataset](#) as an example to describe the whole process.

The basic steps are as below:

1. Prepare the customized dataset
2. Prepare a config
3. Train, test, and infer models on the customized dataset.

### 3.6.1 Prepare the customized dataset

There are three ways to support a new dataset in MMDetection:

1. Reorganize the dataset into COCO format.
2. Reorganize the dataset into a middle format.
3. Implement a new dataset.

Usually, we recommend using the first two methods which are usually easier than the third.

In this note, we give an example of converting the data into COCO format.

**Note:** Datasets and metrics have been decoupled except CityScapes since MMDetection 3.0. Therefore, users can use any kind of evaluation metrics for any format of datasets during validation. For example: evaluate on COCO dataset with VOC metric, or evaluate on OpenImages dataset with both VOC and COCO metrics.

#### COCO annotation format

The necessary keys of COCO format for instance segmentation are as below, for the complete details, please refer [here](#).

```
{
  "images": [image],
  "annotations": [annotation],
  "categories": [category]
}
```

(continues on next page)

(continued from previous page)

```

image = {
    "id": int,
    "width": int,
    "height": int,
    "file_name": str,
}

annotation = {
    "id": int,
    "image_id": int,
    "category_id": int,
    "segmentation": RLE or [polygon],
    "area": float,
    "bbox": [x,y,width,height], # (x, y) are the coordinates of the upper left corner of
    ↪ the bbox
    "iscrowd": 0 or 1,
}

categories = [{
    "id": int,
    "name": str,
    "supercategory": str,
}]

```

Assume we use the balloon dataset. After downloading the data, we need to implement a function to convert the annotation format into the COCO format. Then we can use implemented CocoDataset to load the data and perform training and evaluation.

If you take a look at the dataset, you will find the dataset format is as below:

```

{'base64_img_data': '',
 'file_attributes': {},
 'filename': '34020010494_e5cb88e1c4_k.jpg',
 'fileref': '',
 'regions': {'0': {'region_attributes': {},
 'shape_attributes': {'all_points_x': [1020,
 1000,
 994,
 1003,
 1023,
 1050,
 1089,
 1134,
 1190,
 1265,
 1321,
 1361,
 1403,
 1428,
 1442,
 1445,
 1441,
 1427,

```

(continues on next page)

(continued from previous page)

```
1400,  
1361,  
1316,  
1269,  
1228,  
1198,  
1207,  
1210,  
1190,  
1177,  
1172,  
1174,  
1170,  
1153,  
1127,  
1104,  
1061,  
1032,  
1020],  
'all_points_y': [963,  
899,  
841,  
787,  
738,  
700,  
663,  
638,  
621,  
619,  
643,  
672,  
720,  
765,  
800,  
860,  
896,  
942,  
990,  
1035,  
1079,  
1112,  
1129,  
1134,  
1144,  
1153,  
1166,  
1166,  
1150,  
1136,  
1129,  
1122,  
1112,
```

(continues on next page)

(continued from previous page)

```

1084,
1037,
989,
963],
'name': 'polygon'}}},
'size': 1115004}

```

The annotation is a JSON file where each key indicates an image's all annotations. The code to convert the balloon dataset into coco format is as below.

```

import os.path as osp

import mmcv

from mmengine.fileio import dump, load
from mmengine.utils import track_iter_progress

def convert_balloon_to_coco(ann_file, out_file, image_prefix):
    data_infos = load(ann_file)

    annotations = []
    images = []
    obj_count = 0
    for idx, v in enumerate(track_iter_progress(data_infos.values())):
        filename = v['filename']
        img_path = osp.join(image_prefix, filename)
        height, width = mmcv.imread(img_path).shape[:2]

        images.append(
            dict(id=idx, file_name=filename, height=height, width=width))

        for _, obj in v['regions'].items():
            assert not obj['region_attributes']
            obj = obj['shape_attributes']
            px = obj['all_points_x']
            py = obj['all_points_y']
            poly = [(x + 0.5, y + 0.5) for x, y in zip(px, py)]
            poly = [p for x in poly for p in x]

            x_min, y_min, x_max, y_max = (min(px), min(py), max(px), max(py))

            data_anno = dict(
                image_id=idx,
                id=obj_count,
                category_id=0,
                bbox=[x_min, y_min, x_max - x_min, y_max - y_min],
                area=(x_max - x_min) * (y_max - y_min),
                segmentation=[poly],
                iscrowd=0)
            annotations.append(data_anno)
            obj_count += 1

```

(continues on next page)

(continued from previous page)

```

coco_format_json = dict(
    images=images,
    annotations=annotations,
    categories=[{
        'id': 0,
        'name': 'balloon'
    }]
)
dump(coco_format_json, out_file)

if __name__ == '__main__':
    convert_balloon_to_coco(ann_file='data/balloon/train/via_region_data.json',
                           out_file='data/balloon/train/annotation_coco.json',
                           image_prefix='data/balloon/train')
    convert_balloon_to_coco(ann_file='data/balloon/val/via_region_data.json',
                           out_file='data/balloon/val/annotation_coco.json',
                           image_prefix='data/balloon/val')

```

Using the function above, users can successfully convert the annotation file into json format, then we can use CocoDataset to train and evaluate the model with CocoMetric.

### 3.6.2 Prepare a config

The second step is to prepare a config thus the dataset could be successfully loaded. Assume that we want to use Mask R-CNN with FPN, the config to train the detector on balloon dataset is as below. Assume the config is under directory configs/balloon/ and named as mask-rcnn\_r50-caffe\_fpn\_ms-poly-1x\_balloon.py, the config is as below.

```

# The new config inherits a base config to highlight the necessary modification
_base_ = '../mask_rcnn/mask-rcnn_r50-caffe_fpn_ms-poly-1x_coco.py'

# We also need to change the num_classes in head to match the dataset's annotation
model = dict(
    roi_head=dict(
        bbox_head=dict(num_classes=1), mask_head=dict(num_classes=1))

# Modify dataset related settings
data_root = 'data/balloon/'
metainfo = {
    'classes': ('balloon', ),
    'palette': [
        (220, 20, 60),
    ]
}
train_dataloader = dict(
    batch_size=1,
    dataset=dict(
        data_root=data_root,
        metainfo=metainfo,
        ann_file='train/annotation_coco.json',

```

(continues on next page)

(continued from previous page)

```

        data_prefix=dict(img='train/'))
val_dataloader = dict(
    dataset=dict(
        data_root=data_root,
        metainfo=metainfo,
        ann_file='val/annotation_coco.json',
        data_prefix=dict(img='val/'))
test_dataloader = val_dataloader

# Modify metric related settings
val_evaluator = dict(ann_file=data_root + 'val/annotation_coco.json')
test_evaluator = val_evaluator

# We can use the pre-trained Mask RCNN model to obtain higher performance
load_from = 'https://download.openmmlab.com/mmdetection/v2.0/mask_rcnn/mask_rcnn_r50_
↪caffe_fpn_mstrain-poly_3x_coco/mask_rcnn_r50_caffe_fpn_mstrain-poly_3x_coco_bbox_mAP-0.
↪408__segm_mAP-0.37_20200504_163245-42aa3d00.pth'

```

### 3.6.3 Train a new model

To train a model with the new config, you can simply run

```
python tools/train.py configs/balloon/mask-rcnn_r50-caffe_fpn_ms-poly-1x_balloon.py
```

For more detailed usages, please refer to the [training guide](#).

### 3.6.4 Test and inference

To test the trained model, you can simply run

```
python tools/test.py configs/balloon/mask-rcnn_r50-caffe_fpn_ms-poly-1x_balloon.py work_
↪dirs/mask-rcnn_r50-caffe_fpn_ms-poly-1x_balloon/epoch_12.pth
```

For more detailed usages, please refer to the [testing guide](#).

## 3.7 Train with customized models and standard datasets

In this note, you will know how to train, test and inference your own customized models under standard datasets. We use the cityscapes dataset to train a customized Cascade Mask R-CNN R50 model as an example to demonstrate the whole process, which using [AugFPN](#) to replace the default FPN as neck, and add Rotate or TranslateX as training-time auto augmentation.

The basic steps are as below:

1. Prepare the standard dataset
2. Prepare your own customized model
3. Prepare a config
4. Train, test, and inference models on the standard dataset.

### 3.7.1 Prepare the standard dataset

In this note, as we use the standard cityscapes dataset as an example.

It is recommended to symlink the dataset root to \$MMDETECTION/data. If your folder structure is different, you may need to change the corresponding paths in config files.

```
mmdetection
├── mmdet
├── tools
├── configs
├── data
│   ├── coco
│   │   ├── annotations
│   │   ├── train2017
│   │   ├── val2017
│   │   └── test2017
│   ├── cityscapes
│   │   ├── annotations
│   │   ├── leftImg8bit
│   │   │   ├── train
│   │   │   └── val
│   │   ├── gtFine
│   │   │   ├── train
│   │   │   └── val
│   └── VOCdevkit
│       ├── VOC2007
│       └── VOC2012
```

Or you can set your dataset root through

```
export MMDATASETS=$data_root
```

We will replace dataset root with \$MMDATASETS, so you don't have to modify the corresponding path in config files.

The cityscapes annotations have to be converted into the coco format using tools/dataset\_converters/cityscapes.py:

```
pip install cityscapesscripts
python tools/dataset_converters/cityscapes.py ./data/cityscapes --nproc 8 --out-dir ./
↪ data/cityscapes/annotations
```

Currently, the config files in cityscapes use COCO pre-trained weights to initialize. You could download the pre-trained models in advance if the network is unavailable or slow, otherwise, it would cause errors at the beginning of training.

### 3.7.2 Prepare your own customized model

The second step is to use your own module or training setting. Assume that we want to implement a new neck called AugFPN to replace with the default FPN under the existing detector Cascade Mask R-CNN R50. The following implements AugFPN under MMDetection.

#### 1. Define a new neck (e.g. AugFPN)

Firstly create a new file `mmdet/models/necks/augfpn.py`.

```
import torch.nn as nn
from mmdet.registry import MODELS

@MODELS.register_module()
class AugFPN(nn.Module):

    def __init__(self,
                 in_channels,
                 out_channels,
                 num_outs,
                 start_level=0,
                 end_level=-1,
                 add_extra_convs=False):
        pass

    def forward(self, inputs):
        # implementation is ignored
        pass
```

#### 2. Import the module

You can either add the following line to `mmdet/models/necks/__init__.py`,

```
from .augfpn import AugFPN
```

or alternatively add

```
custom_imports = dict(
    imports=['mmdet.models.necks.augfpn'],
    allow_failed_imports=False)
```

to the config file and avoid modifying the original code.

### 3. Modify the config file

```
neck=dict(
    type='AugFPN',
    in_channels=[256, 512, 1024, 2048],
    out_channels=256,
    num_outs=5)
```

For more detailed usages about customizing your own models (e.g. implement a new backbone, head, loss, etc) and runtime training settings (e.g. define a new optimizer, use gradient clip, customize training schedules and hooks, etc), please refer to the guideline *Customize Models* and *Customize Runtime Settings* respectively.

#### 3.7.3 Prepare a config

The third step is to prepare a config for your own training setting. Assume that we want to add AugFPN and Rotate or Translate augmentation to existing Cascade Mask R-CNN R50 to train the cityscapes dataset, and assume the config is under directory `configs/cityscapes/` and named as `cascade-mask-rcnn_r50_augfpn_autoaug-10e_cityscapes.py`, the config is as below.

```
# The new config inherits the base configs to highlight the necessary modification
_base_ = [
    '../_base_/models/cascade-mask-rcnn_r50_fpn.py',
    '../_base_/datasets/cityscapes_instance.py', '../_base_/default_runtime.py'
]

model = dict(
    # set None to avoid loading ImageNet pre-trained backbone,
    # instead here we set `load_from` to load from COCO pre-trained detectors.
    backbone=dict(init_cfg=None),
    # replace neck from defaultly `FPN` to our new implemented module `AugFPN`
    neck=dict(
        type='AugFPN',
        in_channels=[256, 512, 1024, 2048],
        out_channels=256,
        num_outs=5),
    # We also need to change the num_classes in head from 80 to 8, to match the
    # cityscapes dataset's annotation. This modification involves `bbox_head` and `mask_
    ↪ head`.
    roi_head=dict(
        bbox_head=[
            dict(
                type='Shared2FCBBoxHead',
                in_channels=256,
                fc_out_channels=1024,
                roi_feat_size=7,
                # change the number of classes from defaultly COCO to cityscapes
                num_classes=8,
                bbox_coder=dict(
                    type='DeltaXYWHBBoxCoder',
                    target_means=[0., 0., 0., 0.],
                    target_std=[0.1, 0.1, 0.2, 0.2]),
                    reg_class_agnostic=True,
```

(continues on next page)

(continued from previous page)

```

        loss_cls=dict(
            type='CrossEntropyLoss',
            use_sigmoid=False,
            loss_weight=1.0),
        loss_bbox=dict(type='SmoothL1Loss', beta=1.0,
                        loss_weight=1.0)),
    dict(
        type='Shared2FCBBoxHead',
        in_channels=256,
        fc_out_channels=1024,
        roi_feat_size=7,
        # change the number of classes from defaultly COCO to cityscapes
        num_classes=8,
        bbox_coder=dict(
            type='DeltaXYWHBBoxCoder',
            target_means=[0., 0., 0., 0.],
            target_stds=[0.05, 0.05, 0.1, 0.1]),
        reg_class_agnostic=True,
        loss_cls=dict(
            type='CrossEntropyLoss',
            use_sigmoid=False,
            loss_weight=1.0),
        loss_bbox=dict(type='SmoothL1Loss', beta=1.0,
                        loss_weight=1.0)),
    dict(
        type='Shared2FCBBoxHead',
        in_channels=256,
        fc_out_channels=1024,
        roi_feat_size=7,
        # change the number of classes from defaultly COCO to cityscapes
        num_classes=8,
        bbox_coder=dict(
            type='DeltaXYWHBBoxCoder',
            target_means=[0., 0., 0., 0.],
            target_stds=[0.033, 0.033, 0.067, 0.067]),
        reg_class_agnostic=True,
        loss_cls=dict(
            type='CrossEntropyLoss',
            use_sigmoid=False,
            loss_weight=1.0),
        loss_bbox=dict(type='SmoothL1Loss', beta=1.0, loss_weight=1.0))
],
mask_head=dict(
    type='FCNMaskHead',
    num_convs=4,
    in_channels=256,
    conv_out_channels=256,
    # change the number of classes from default COCO to cityscapes
    num_classes=8,
    loss_mask=dict(
        type='CrossEntropyLoss', use_mask=True, loss_weight=1.0))))

```

(continues on next page)

(continued from previous page)

```

# over-write `train_pipeline` for new added `AutoAugment` training setting
train_pipeline = [
    dict(type='LoadImageFromFile'),
    dict(type='LoadAnnotations', with_bbox=True, with_mask=True),
    dict(
        type='AutoAugment',
        policies=[
            dict(
                type='Rotate',
                level=5,
                img_fill_val=(124, 116, 104),
                prob=0.5,
                scale=1)
        ],
        [dict(type='Rotate', level=7, img_fill_val=(124, 116, 104)),
         dict(
             type='TranslateX',
             level=5,
             prob=0.5,
             img_fill_val=(124, 116, 104))
        ]
    ),
    dict(
        type='RandomResize',
        scale=[(2048, 800), (2048, 1024)],
        keep_ratio=True),
    dict(type='RandomFlip', prob=0.5),
    dict(type='PackDetInputs'),
]

# set batch_size per gpu, and set new training pipeline
train_dataloader = dict(
    batch_size=1,
    num_workers=3,
    # over-write `pipeline` with new training pipeline setting
    dataset=dict(pipeline=train_pipeline))

# Set optimizer
optim_wrapper = dict(
    type='OptimWrapper',
    optimizer=dict(type='SGD', lr=0.01, momentum=0.9, weight_decay=0.0001))

# Set customized learning policy
param_scheduler = [
    dict(
        type='LinearLR', start_factor=0.001, by_epoch=False, begin=0, end=500),
    dict(
        type='MultiStepLR',
        begin=0,
        end=10,
        by_epoch=True,
        milestones=[8],

```

(continues on next page)

(continued from previous page)

```
        gamma=0.1)
]

# train, val, test loop config
train_cfg = dict(max_epochs=10, val_interval=1)

# We can use the COCO pre-trained Cascade Mask R-CNN R50 model for a more stable_
↳ performance initialization
load_from = 'https://download.openmmlab.com/mmdetection/v2.0/cascade_rcnn/cascade_mask_
↳ rcnn_r50_fpn_1x_coco/cascade_mask_rcnn_r50_fpn_1x_coco_20200203-9d4dcb24.pth'
```

### 3.7.4 Train a new model

To train a model with the new config, you can simply run

```
python tools/train.py configs/cityscapes/cascade-mask-rcnn_r50_augfpn_autoaug-10e_
↳ cityscapes.py
```

For more detailed usages, please refer to the [training guide](#).

### 3.7.5 Test and inference

To test the trained model, you can simply run

```
python tools/test.py configs/cityscapes/cascade-mask-rcnn_r50_augfpn_autoaug-10e_
↳ cityscapes.py work_dirs/cascade-mask-rcnn_r50_augfpn_autoaug-10e_cityscapes/epoch_10.
↳ pth
```

For more detailed usages, please refer to the [testing guide](#).

## 3.8 Finetuning Models

Detectors pre-trained on the COCO dataset can serve as a good pre-trained model for other datasets, e.g., CityScapes and KITTI Dataset. This tutorial provides instructions for users to use the models provided in the [Model Zoo](#) for other datasets to obtain better performance.

There are two steps to finetune a model on a new dataset.

- Add support for the new dataset following [Customize Datasets](#).
- Modify the configs as will be discussed in this tutorial.

Take the finetuning process on Cityscapes Dataset as an example, the users need to modify five parts in the config.

### 3.8.1 Inherit base configs

To release the burden and reduce bugs in writing the whole configs, MMDetection V3.0 support inheriting configs from multiple existing configs. To finetune a Mask RCNN model, the new config needs to inherit `_base_/models/mask-rcnn_r50_fpn.py` to build the basic structure of the model. To use the Cityscapes Dataset, the new config can also simply inherit `_base_/datasets/cityscapes_instance.py`. For runtime settings such as logger settings, the new config needs to inherit `_base_/default_runtime.py`. For training schedules, the new config can to inherit `_base_/schedules/schedule_1x.py`. These configs are in the `configs` directory and the users can also choose to write the whole contents rather than use inheritance.

```
_base_ = [
    '../_base_/models/mask-rcnn_r50_fpn.py',
    '../_base_/datasets/cityscapes_instance.py', '../_base_/default_runtime.py',
    '../_base_/schedules/schedule_1x.py'
]
```

### 3.8.2 Modify head

Then the new config needs to modify the head according to the class numbers of the new datasets. By only changing `num_classes` in the `roi_head`, the weights of the pre-trained models are mostly reused except for the final prediction head.

```
model = dict(
    roi_head=dict(
        bbox_head=dict(
            type='Shared2FCBBoxHead',
            in_channels=256,
            fc_out_channels=1024,
            roi_feat_size=7,
            num_classes=8,
            bbox_coder=dict(
                type='DeltaXYWHBBoxCoder',
                target_means=[0., 0., 0., 0.],
                target_stds=[0.1, 0.1, 0.2, 0.2]),
            reg_class_agnostic=False,
            loss_cls=dict(
                type='CrossEntropyLoss', use_sigmoid=False, loss_weight=1.0),
            loss_bbox=dict(type='SmoothL1Loss', beta=1.0, loss_weight=1.0)),
        mask_head=dict(
            type='FCNMaskHead',
            num_convs=4,
            in_channels=256,
            conv_out_channels=256,
            num_classes=8,
            loss_mask=dict(
                type='CrossEntropyLoss', use_mask=True, loss_weight=1.0))))
```

### 3.8.3 Modify dataset

The users may also need to prepare the dataset and write the configs about dataset, refer to *Customize Datasets* for more detail. MMDetection V3.0 already supports VOC, WIDERFACE, COCO, LIPS, OpenImages, DeepFashion, Objects365, and Cityscapes Dataset.

### 3.8.4 Modify training schedule

The finetuning hyperparameters vary from the default schedule. It usually requires a smaller learning rate and fewer training epochs

```
# optimizer
# lr is set for a batch size of 8
optim_wrapper = dict(optimizer=dict(lr=0.01))

# learning rate
param_scheduler = [
    dict(
        type='LinearLR', start_factor=0.001, by_epoch=False, begin=0, end=500),
    dict(
        type='MultiStepLR',
        begin=0,
        end=8,
        by_epoch=True,
        milestones=[7],
        gamma=0.1)
]

# max_epochs
train_cfg = dict(max_epochs=8)

# log config
default_hooks = dict(logger=dict(interval=100)),
```

### 3.8.5 Use pre-trained model

To use the pre-trained model, the new config adds the link of pre-trained models in the `load_from`. The users might need to download the model weights before training to avoid the download time during training.

```
load_from = 'https://download.openmmlab.com/mmdetection/v2.0/mask_rcnn/mask_rcnn_r50_
↪caffe_fpn_mstrain-poly_3x_coco/mask_rcnn_r50_caffe_fpn_mstrain-poly_3x_coco_bbox_mAP-0.
↪408__segm_mAP-0.37_20200504_163245-42aa3d00.pth' # noqa
```

## 3.9 Test Results Submission

### 3.9.1 Panoptic segmentation test results submission

The following sections introduce how to produce the prediction results of panoptic segmentation models on the COCO test-dev set and submit the predictions to [COCO evaluation server](#).

#### Prerequisites

- Download [COCO test dataset images](#), [testing image info](#), and [panoptic train/val annotations](#), then unzip them, put 'test2017' to data/coco/, put json files and annotation files to data/coco/annotations/.

```
# suppose data/coco/ does not exist
mkdir -pv data/coco/

# download test2017
wget -P data/coco/ http://images.cocodataset.org/zips/test2017.zip
wget -P data/coco/ http://images.cocodataset.org/annotations/image_info_test2017.zip
wget -P data/coco/ http://images.cocodataset.org/annotations/panoptic_annotations_
↪trainval2017.zip

# unzip them
unzip data/coco/test2017.zip -d data/coco/
unzip data/coco/image_info_test2017.zip -d data/coco/
unzip data/coco/panoptic_annotations_trainval2017.zip -d data/coco/

# remove zip files (optional)
rm -rf data/coco/test2017.zip data/coco/image_info_test2017.zip data/coco/panoptic_
↪annotations_trainval2017.zip
```

- Run the following code to update category information in testing image info. Since the attribute `isthing` is missing in category information of 'image\_info\_test-dev2017.json', we need to update it with the category information in 'panoptic\_val2017.json'.

```
python tools/misc/gen_coco_panoptic_test_info.py data/coco/annotations
```

After completing the above preparations, your directory structure of data should be like this:

```
data
|-- coco
|   |-- annotations
|   |   |-- image_info_test-dev2017.json
|   |   |-- image_info_test2017.json
|   |   |-- panoptic_image_info_test-dev2017.json
|   |   |-- panoptic_train2017.json
|   |   |-- panoptic_train2017.zip
|   |   |-- panoptic_val2017.json
|   |   |-- panoptic_val2017.zip
|   |-- test2017
```

## Inference on coco test-dev

To do inference on coco test-dev, we should update the setting of `test_dataloader` and `test_evaluator` first. There are two ways to do this: 1. update them in config file; 2. update them in command line.

### Update them in config file

The relevant settings are provided at the end of `configs/_base_/datasets/coco_panoptic.py`, as below.

```
test_dataloader = dict(
    batch_size=1,
    num_workers=1,
    persistent_workers=True,
    drop_last=False,
    sampler=dict(type='DefaultSampler', shuffle=False),
    dataset=dict(
        type=dataset_type,
        data_root=data_root,
        ann_file='annotations/panoptic_image_info_test-dev2017.json',
        data_prefix=dict(img='test2017/'),
        test_mode=True,
        pipeline=test_pipeline))
test_evaluator = dict(
    type='CocoPanopticMetric',
    format_only=True,
    ann_file=data_root + 'annotations/panoptic_image_info_test-dev2017.json',
    outfile_prefix='./work_dirs/coco_panoptic/test')
```

Any of the following way can be used to update the setting for inference on coco test-dev set.

Case 1: Directly uncomment the setting in `configs/_base_/datasets/coco_panoptic.py`.

Case 2: Copy the following setting to the config file you used now.

```
test_dataloader = dict(
    dataset=dict(
        ann_file='annotations/panoptic_image_info_test-dev2017.json',
        data_prefix=dict(img='test2017/', _delete_=True)))
test_evaluator = dict(
    format_only=True,
    ann_file=data_root + 'annotations/panoptic_image_info_test-dev2017.json',
    outfile_prefix='./work_dirs/coco_panoptic/test')
```

Then infer on coco test-dev et by the following command.

```
python tools/test.py \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE}
```

## Update them in command line

The command for update of the related settings and inference on coco test-dev are as below.

```
# test with single gpu
CUDA_VISIBLE_DEVICES=0 python tools/test.py \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    --cfg-options \
    test_dataloader.dataset.ann_file=annotations/panoptic_image_info_test-dev2017.json \
    test_dataloader.dataset.data_prefix.img=test2017 \
    test_dataloader.dataset.data_prefix._delete_=True \
    test_evaluator.format_only=True \
    test_evaluator.ann_file=data/coco/annotations/panoptic_image_info_test-dev2017.json \
    test_evaluator.outfile_prefix=${WORK_DIR}/results

# test with four gpus
CUDA_VISIBLE_DEVICES=0,1,3,4 bash tools/dist_test.sh \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    8 \ # eight gpus
    --cfg-options \
    test_dataloader.dataset.ann_file=annotations/panoptic_image_info_test-dev2017.json \
    test_dataloader.dataset.data_prefix.img=test2017 \
    test_dataloader.dataset.data_prefix._delete_=True \
    test_evaluator.format_only=True \
    test_evaluator.ann_file=data/coco/annotations/panoptic_image_info_test-dev2017.json \
    test_evaluator.outfile_prefix=${WORK_DIR}/results

# test with slurm
GPUS=8 tools/slurm_test.sh \
    ${Partition} \
    ${JOB_NAME} \
    ${CONFIG_FILE} \
    ${CHECKPOINT_FILE} \
    --cfg-options \
    test_dataloader.dataset.ann_file=annotations/panoptic_image_info_test-dev2017.json \
    test_dataloader.dataset.data_prefix.img=test2017 \
    test_dataloader.dataset.data_prefix._delete_=True \
    test_evaluator.format_only=True \
    test_evaluator.ann_file=data/coco/annotations/panoptic_image_info_test-dev2017.json \
    test_evaluator.outfile_prefix=${WORK_DIR}/results
```

### Example

Suppose we perform inference on test2017 using pretrained MaskFormer with ResNet-50 backbone.

```
# test with single gpu
CUDA_VISIBLE_DEVICES=0 python tools/test.py \
    configs/maskformer/maskformer_r50_mstrain_16x1_75e_coco.py \
    checkpoints/maskformer_r50_mstrain_16x1_75e_coco_20220221_141956-bc2699cb.pth \
    --cfg-options \
    test_dataloader.dataset.ann_file=annotations/panoptic_image_info_test-dev2017.json \
    test_dataloader.dataset.data_prefix.img=test2017 \
```

(continues on next page)

(continued from previous page)

```
test_dataloader.dataset.data_prefix._delete_=True \
test_evaluator.format_only=True \
test_evaluator.ann_file=data/coco/annotations/panoptic_image_info_test-dev2017.json \
test_evaluator.outfile_prefix=work_dirs/maskformer/results
```

### Rename files and zip results

After inference, the panoptic segmentation results (a json file and a directory where the masks are stored) will be in `WORK_DIR`. We should rename them according to the naming convention described on [COCO's Website](#). Finally, we need to compress the json and the directory where the masks are stored into a zip file, and rename the zip file according to the naming convention. Note that the zip file should **directly** contains the above two files.

The commands to rename files and zip results:

```
# In WORK_DIR, we have panoptic segmentation results: 'panoptic' and 'results.panoptic.json'
↪ '.'
cd ${WORK_DIR}

# replace '[algorithm_name]' with the name of algorithm you used.
mv ./panoptic ./panoptic_test-dev2017_[algorithm_name]_results
mv ./results.panoptic.json ./panoptic_test-dev2017_[algorithm_name]_results.json
zip panoptic_test-dev2017_[algorithm_name]_results.zip -ur panoptic_test-dev2017_
↪ [algorithm_name]_results panoptic_test-dev2017_[algorithm_name]_results.json
```

## 3.10 Weight initialization

During training, a proper initialization strategy is beneficial to speeding up the training or obtaining a higher performance. `MMCV` provide some commonly used methods for initializing modules like `nn.Conv2d`. Model initialization in `MMDetection` mainly uses `init_cfg`. Users can initialize models with following two steps:

1. Define `init_cfg` for a model or its components in `model_cfg`, but `init_cfg` of children components have higher priority and will override `init_cfg` of parents modules.
2. Build model as usual, but call `model.init_weights()` method explicitly, and model parameters will be initialized as configuration.

The high-level workflow of initialization in `MMDetection` is :

```
model_cfg(init_cfg) -> build_from_cfg -> model -> init_weight() -> initialize(self, self.init_cfg) -> children's init_weight()
```

### 3.10.1 Description

It is dict or list[dict], and contains the following keys and values:

- `type` (str), containing the initializer name in `INITIALIZERS`, and followed by arguments of the initializer.
- `layer` (str or list[str]), containing the names of basic layers in Pytorch or `MMCV` with learnable parameters that will be initialized, e.g. `'Conv2d'`, `'DeformConv2d'`.
- `override` (dict or list[dict]), containing the sub-modules that not inherit from `BaseModule` and whose initialization configuration is different from other layers' which are in `'layer'` key. Initializer defined in `type` will work

for all layers defined in `layer`, so if sub-modules are not derived Classes of `BaseModule` but can be initialized as same ways of layers in `layer`, it does not need to use `override`. `override` contains:

- type followed by arguments of initializer;
- name to indicate sub-module which will be initialized.

### 3.10.2 Initialize parameters

Inherit a new model from `mmcv.runner.BaseModule` or `mmdet.models` Here we show an example of `FooModel`.

```
import torch.nn as nn
from mmcv.runner import BaseModule

class FooModel(BaseModule):
    def __init__(self,
                 arg1,
                 arg2,
                 init_cfg=None):
        super(FooModel, self).__init__(init_cfg)
        ...
```

- Initialize model by using `init_cfg` directly in code

```
import torch.nn as nn
from mmcv.runner import BaseModule
# or directly inherit mmdet models

class FooModel(BaseModule):
    def __init__(self,
                 arg1,
                 arg2,
                 init_cfg=XXX):
        super(FooModel, self).__init__(init_cfg)
        ...
```

- Initialize model by using `init_cfg` directly in `mmcv.Sequential` or `mmcv.ModuleList` code

```
from mmcv.runner import BaseModule, ModuleList

class FooModel(BaseModule):
    def __init__(self,
                 arg1,
                 arg2,
                 init_cfg=None):
        super(FooModel, self).__init__(init_cfg)
        ...
        self.conv1 = ModuleList(init_cfg=XXX)
```

- Initialize model by using `init_cfg` in config file

```
model = dict(
    ...
    model = dict(
```

(continues on next page)

(continued from previous page)

```

        type='FooModel',
        arg1=XXX,
        arg2=XXX,
        init_cfg=XXX),
    ...

```

### 3.10.3 Usage of init\_cfg

#### 1. Initialize model by layer key

If we only define layer, it just initialize the layer in layer key.

NOTE: Value of layer key is the class name with attributes weights and bias of Pytorch, (so such as MultiheadAttention layer is not supported).

- Define layer key for initializing module with same configuration.

```

init_cfg = dict(type='Constant', layer=['Conv1d', 'Conv2d', 'Linear'], val=1)
# initialize whole module with same configuration

```

- Define layer key for initializing layer with different configurations.

```

init_cfg = [dict(type='Constant', layer='Conv1d', val=1),
            dict(type='Constant', layer='Conv2d', val=2),
            dict(type='Constant', layer='Linear', val=3)]
# nn.Conv1d will be initialized with dict(type='Constant', val=1)
# nn.Conv2d will be initialized with dict(type='Constant', val=2)
# nn.Linear will be initialized with dict(type='Constant', val=3)

```

#### 2. Initialize model by override key

- When initializing some specific part with its attribute name, we can use override key, and the value in override will ignore the value in init\_cfg.

```

# layers
# self.feat = nn.Conv1d(3, 1, 3)
# self.reg = nn.Conv2d(3, 3, 3)
# self.cls = nn.Linear(1,2)

init_cfg = dict(type='Constant',
                layer=['Conv1d', 'Conv2d'], val=1, bias=2,
                override=dict(type='Constant', name='reg', val=3, bias=4))
# self.feat and self.cls will be initialized with dict(type='Constant', val=1,
↪ bias=2)
# The module called 'reg' will be initialized with dict(type='Constant', val=3, bias=4)

```

- If layer is None in init\_cfg, only sub-module with the name in override will be initialized, and type and other args in override can be omitted.

```

# layers
# self.feat = nn.Conv1d(3, 1, 3)
# self.reg = nn.Conv2d(3, 3, 3)
# self.cls = nn.Linear(1,2)

```

(continues on next page)

(continued from previous page)

```
init_cfg = dict(type='Constant', val=1, bias=2, override=dict(name='reg'))

# self.feats and self.cls will be initialized by Pytorch
# The module called 'reg' will be initialized with dict(type='Constant', val=1, bias=2)
```

- If we don't define layer key or override key, it will not initialize anything.
- Invalid usage

```
# It is invalid that override don't have name key
init_cfg = dict(type='Constant', layer=['Conv1d', 'Conv2d'], val=1, bias=2,
                override=dict(type='Constant', val=3, bias=4))

# It is also invalid that override has name and other args except type
init_cfg = dict(type='Constant', layer=['Conv1d', 'Conv2d'], val=1, bias=2,
                override=dict(name='reg', val=3, bias=4))
```

### 3. Initialize model with the pretrained model

```
init_cfg = dict(type='Pretrained',
                checkpoint='torchvision://resnet50')
```

More details can refer to the documentation in [MMEEngine](#)

## 3.11 Use a single stage detector as RPN

Region proposal network (RPN) is a submodule in [Faster R-CNN](#), which generates proposals for the second stage of Faster R-CNN. Most two-stage detectors in MMDetection use RPNHead to generate proposals as RPN. However, any single-stage detector can serve as an RPN since their bounding box predictions can also be regarded as region proposals and thus be refined in the R-CNN. Therefore, MMDetection v3.0 supports that.

To illustrate the whole process, here we give an example of how to use an anchor-free single-stage model FCOS as an RPN in Faster R-CNN.

The outline of this tutorial is as below:

1. Use FCOSHead as an RPNHead in Faster R-CNN
2. Evaluate proposals
3. Train the customized Faster R-CNN with pre-trained FCOS

### 3.11.1 Use FCOSHead as an RPNHead in Faster R-CNN

To set FCOSHead as an RPNHead in Faster R-CNN, we should create a new config file named `configs/faster_rcnn/faster-rcnn_r50_fpn_fcos-rpn_1x_coco.py`, and replace with the setting of `rpn_head` with the setting of `bbox_head` in `configs/fcos/fcos_r50-caffe_fpn_gn-head_1x_coco.py`. Besides, we still use the neck setting of FCOS with strides of [8, 16, 32, 64, 128], and update `featmap_strides` of `bbox_roi_extractor` to [8, 16, 32, 64, 128]. To avoid loss goes NAN, we apply warmup during the first 1000 iterations instead of the first 500 iterations, which means that the lr increases more slowly. The config is as follows:

```

_base_ = [
    '../_base_/models/faster-rcnn_r50_fpn.py',
    '../_base_/datasets/coco_detection.py',
    '../_base_/schedules/schedule_1x.py', '../_base_/default_runtime.py'
]

model = dict(
    # copied from configs/fcos/fcos_r50-caffe_fpn_gn-head_1x_coco.py
    neck=dict(
        start_level=1,
        add_extra_convs='on_output', # use P5
        relu_before_extra_convs=True),
    rpn_head=dict(
        _delete_=True, # ignore the unused old settings
        type='FCOSHead',
        num_classes=1, # num_classes = 1 for rpn, if num_classes > 1, it will be set to 1
        ↪1 in TwoStageDetector automatically
        in_channels=256,
        stacked_convs=4,
        feat_channels=256,
        strides=[8, 16, 32, 64, 128],
        loss_cls=dict(
            type='FocalLoss',
            use_sigmoid=True,
            gamma=2.0,
            alpha=0.25,
            loss_weight=1.0),
        loss_bbox=dict(type='IoULoss', loss_weight=1.0),
        loss_centerness=dict(
            type='CrossEntropyLoss', use_sigmoid=True, loss_weight=1.0)),
    roi_head=dict( # update featmap_strides due to the strides in neck
        bbox_roi_extractor=dict(featmap_strides=[8, 16, 32, 64, 128])))

# learning rate
param_scheduler = [
    dict(
        type='LinearLR', start_factor=0.001, by_epoch=False, begin=0,
        end=1000), # Slowly increase lr, otherwise loss becomes NAN
    dict(
        type='MultiStepLR',
        begin=0,
        end=12,
        by_epoch=True,
        milestones=[8, 11],
        gamma=0.1)
]

```

Then, we could use the following command to train our customized model. For more training commands, please refer to [here](#).

```

# training with 8 GPUS
bash tools/dist_train.sh configs/faster_rcnn/faster-rcnn_r50_fpn_fcos-rpn_1x_coco.py \
    8 \

```

(continues on next page)

(continued from previous page)

```
--work-dir ./work_dirs/faster-rcnn_r50_fpn_fcos-rpn_1x_coco
```

### 3.11.2 Evaluate proposals

The quality of proposals is of great importance to the performance of detector, therefore, we also provide a way to evaluate proposals. Same as above, create a new config file named `configs/rpn/fcos-rpn_r50_fpn_1x_coco.py`, and replace with setting of `rpn_head` with the setting of `bbox_head` in `configs/fcos/fcos_r50-caffe_fpn_gn-head_1x_coco.py`.

```
_base_ = [
    './_base_/models/rpn_r50_fpn.py', './_base_/datasets/coco_detection.py',
    './_base_/schedules/schedule_1x.py', './_base_/default_runtime.py'
]

val_evaluator = dict(metric='proposal_fast')
test_evaluator = val_evaluator

model = dict(
    # copied from configs/fcos/fcos_r50-caffe_fpn_gn-head_1x_coco.py
    neck=dict(
        start_level=1,
        add_extra_convs='on_output', # use P5
        relu_before_extra_convs=True),
    rpn_head=dict(
        _delete_=True, # ignore the unused old settings
        type='FCOSHead',
        num_classes=1, # num_classes = 1 for rpn, if num_classes > 1, it will be set to
        ↪ 1 in RPN automatically
        in_channels=256,
        stacked_convs=4,
        feat_channels=256,
        strides=[8, 16, 32, 64, 128],
        loss_cls=dict(
            type='FocalLoss',
            use_sigmoid=True,
            gamma=2.0,
            alpha=0.25,
            loss_weight=1.0),
        loss_bbox=dict(type='IoULoss', loss_weight=1.0),
        loss_centerness=dict(
            type='CrossEntropyLoss', use_sigmoid=True, loss_weight=1.0)))
```

Suppose we have the checkpoint `./work_dirs/faster-rcnn_r50_fpn_fcos-rpn_1x_coco/epoch_12.pth` after training, then we can evaluate the quality of proposals with the following command.

```
# testing with 8 GPUs
bash tools/dist_test.sh \
    configs/rpn/fcos-rpn_r50_fpn_1x_coco.py \
    ./work_dirs/faster-rcnn_r50_fpn_fcos-rpn_1x_coco/epoch_12.pth \
    8
```

### 3.11.3 Train the customized Faster R-CNN with pre-trained FCOS

Pre-training not only speeds up convergence of training, but also improves the performance of the detector. Therefore, here we give an example to illustrate how to use a pre-trained FCOS as an RPN to accelerate training and improve the accuracy. Suppose we want to use FCOSHead as an rpn head in Faster R-CNN and train with the pre-trained `fcos_r50-caffe_fpn_gn-head_1x_coco`. The content of config file named `configs/faster_rcnn/faster-rcnn_r50-caffe_fpn_fcos-rpn_1x_coco.py` is as the following. Note that `fcos_r50-caffe_fpn_gn-head_1x_coco` uses a caffe version of ResNet50, the pixel mean and std in `data_preprocessor` thus need to be updated.

```
_base_ = [
    '../_base_/models/faster-rcnn_r50_fpn.py',
    '../_base_/datasets/coco_detection.py',
    '../_base_/schedules/schedule_1x.py', '../_base_/default_runtime.py'
]

model = dict(
    data_preprocessor=dict(
        mean=[103.530, 116.280, 123.675],
        std=[1.0, 1.0, 1.0],
        bgr_to_rgb=False),
    backbone=dict(
        norm_cfg=dict(type='BN', requires_grad=False),
        style='caffe',
        init_cfg=None), # the checkpoint in ``load_from`` contains the weights of
↪backbone
    neck=dict(
        start_level=1,
        add_extra_convs='on_output', # use P5
        relu_before_extra_convs=True),
    rpn_head=dict(
        _delete_=True, # ignore the unused old settings
        type='FCOSHead',
        num_classes=1, # num_classes = 1 for rpn, if num_classes > 1, it will be set to
↪1 in TwoStageDetector automatically
        in_channels=256,
        stacked_convs=4,
        feat_channels=256,
        strides=[8, 16, 32, 64, 128],
        loss_cls=dict(
            type='FocalLoss',
            use_sigmoid=True,
            gamma=2.0,
            alpha=0.25,
            loss_weight=1.0),
        loss_bbox=dict(type='IoULoss', loss_weight=1.0),
        loss_centerness=dict(
            type='CrossEntropyLoss', use_sigmoid=True, loss_weight=1.0)),
    roi_head=dict( # update featmap_strides due to the strides in neck
        bbox_roi_extractor=dict(featmap_strides=[8, 16, 32, 64, 128])))

load_from = 'https://download.openmmlab.com/mmdetection/v2.0/fcos/fcos_r50-caffe_fpn_gn-
↪head_1x_coco/fcos_r50-caffe_fpn_gn-head_1x_coco-821213aa.pth'
```

The command for training is as below.

```
bash tools/dist_train.sh \
  configs/faster_rcnn/faster-rcnn_r50-caffe_fpn_fcos-rpn_1x_coco.py \
  8 \
  --work-dir ./work_dirs/faster-rcnn_r50-caffe_fpn_fcos-rpn_1x_coco
```

## 3.12 Semi-supervised Object Detection

Semi-supervised object detection uses both labeled data and unlabeled data for training. It not only reduces the annotation burden for training high-performance object detectors but also further improves the object detector by using a large number of unlabeled data.

A typical procedure to train a semi-supervised object detector is as below:

- Prepare and split dataset
- Configure multi-branch pipeline
- Configure semi-supervised dataloader
- Configure semi-supervised model
- Configure MeanTeacherHook
- Configure TeacherStudentValLoop

### 3.12.1 Prepare and split dataset

We provide a dataset download script, which downloads the coco2017 dataset by default and decompresses it automatically.

```
python tools/misc/download_dataset.py
```

The decompressed dataset directory structure is as below:

```
mmdetection
├── data
│   └── coco
│       ├── annotations
│       │   ├── image_info_unlabeled2017.json
│       │   ├── instances_train2017.json
│       │   └── instances_val2017.json
│       ├── test2017
│       ├── train2017
│       ├── unlabeled2017
│       └── val2017
```

There are two common experimental settings for semi-supervised object detection on the coco2017 dataset:

(1) Split `train2017` according to a fixed percentage (1%, 2%, 5% and 10%) as a labeled dataset, and the rest of `train2017` as an unlabeled dataset. Because the different splits of `train2017` as labeled datasets will cause significant fluctuation on the accuracy of the semi-supervised detectors, five-fold cross-validation is used in practice to evaluate the algorithm. We provide the dataset split script:

```
python tools/misc/split_coco.py
```

By default, the script will split train2017 according to the labeled data ratio 1%, 2%, 5% and 10%, and each split will be randomly repeated 5 times for cross-validation. The generated semi-supervised annotation file name format is as below:

- the name format of labeled dataset: `instances_train2017.{fold}@{percent}.json`
- the name format of unlabeled dataset: `instances_train2017.{fold}@{percent}-unlabeled.json`

Here, `fold` is used for cross-validation, and `percent` represents the ratio of labeled data. The directory structure of the divided dataset is as below:

```
mmdetection
├── data
│   ├── coco
│   │   ├── annotations
│   │   │   ├── image_info_unlabeled2017.json
│   │   │   ├── instances_train2017.json
│   │   │   └── instances_val2017.json
│   │   └── semi_anns
│   │       ├── instances_train2017.1@1.json
│   │       ├── instances_train2017.1@1-unlabeled.json
│   │       ├── instances_train2017.1@2.json
│   │       ├── instances_train2017.1@2-unlabeled.json
│   │       ├── instances_train2017.1@5.json
│   │       ├── instances_train2017.1@5-unlabeled.json
│   │       ├── instances_train2017.1@10.json
│   │       ├── instances_train2017.1@10-unlabeled.json
│   │       ├── instances_train2017.2@1.json
│   │       └── instances_train2017.2@1-unlabeled.json
│   ├── test2017
│   ├── train2017
│   ├── unlabeled2017
│   └── val2017
```

(2) Use `train2017` as the labeled dataset and `unlabeled2017` as the unlabeled dataset. Since `image_info_unlabeled2017.json` does not contain categories information, the `CocoDataset` cannot be initialized, so you need to write the categories of `instances_train2017.json` into `image_info_unlabeled2017.json` and save it as `instances_unlabeled2017.json`, the relevant script is as below:

```
from mmengine.fileio import load, dump

anns_train = load('instances_train2017.json')
anns_unlabeled = load('image_info_unlabeled2017.json')
anns_unlabeled['categories'] = anns_train['categories']
dump(anns_unlabeled, 'instances_unlabeled2017.json')
```

The processed dataset directory is as below:

```
mmdetection
├── data
│   ├── coco
│   │   ├── annotations
│   │   └── image_info_unlabeled2017.json
```

(continues on next page)

(continued from previous page)

```

| | | | — instances_train2017.json
| | | | — instances_unlabeled2017.json
| | | | — instances_val2017.json
| | | — test2017
| | — train2017
| — unlabeled2017
— val2017

```

### 3.12.2 Configure multi-branch pipeline

There are two main approaches to semi-supervised learning, [consistency regularization](#) and [pseudo label](#). Consistency regularization often requires some careful design, while pseudo label have a simpler form and are easier to extend to downstream tasks. We adopt a teacher-student joint training semi-supervised object detection framework based on pseudo label, so labeled data and unlabeled data need to configure different data pipeline:

(1) Pipeline for labeled data

```

# pipeline used to augment labeled data,
# which will be sent to student model for supervised training.
sup_pipeline = [
    dict(type='LoadImageFromFile', backend_args=backend_args),
    dict(type='LoadAnnotations', with_bbox=True),
    dict(type='RandomResize', scale=scale, keep_ratio=True),
    dict(type='RandomFlip', prob=0.5),
    dict(type='RandAugment', aug_space=color_space, aug_num=1),
    dict(type='FilterAnnotations', min_gt_bbox_wh=(1e-2, 1e-2)),
    dict(type='MultiBranch', sup=dict(type='PackDetInputs'))
]

```

(2) Pipeline for unlabeled data

```

# pipeline used to augment unlabeled data weakly,
# which will be sent to teacher model for predicting pseudo instances.
weak_pipeline = [
    dict(type='RandomResize', scale=scale, keep_ratio=True),
    dict(type='RandomFlip', prob=0.5),
    dict(
        type='PackDetInputs',
        meta_keys=('img_id', 'img_path', 'ori_shape', 'img_shape',
                  'scale_factor', 'flip', 'flip_direction',
                  'homography_matrix')),
]

# pipeline used to augment unlabeled data strongly,
# which will be sent to student model for unsupervised training.
strong_pipeline = [
    dict(type='RandomResize', scale=scale, keep_ratio=True),
    dict(type='RandomFlip', prob=0.5),
    dict(
        type='RandomOrder',
        transforms=[

```

(continues on next page)

(continued from previous page)

```

        dict(type='RandAugment', aug_space=color_space, aug_num=1),
        dict(type='RandAugment', aug_space=geometric, aug_num=1),
    ]),
    dict(type='RandomErasing', n_patches=(1, 5), ratio=(0, 0.2)),
    dict(type='FilterAnnotations', min_gt_bbox_wh=(1e-2, 1e-2)),
    dict(
        type='PackDetInputs',
        meta_keys=('img_id', 'img_path', 'ori_shape', 'img_shape',
                   'scale_factor', 'flip', 'flip_direction',
                   'homography_matrix')),
]

# pipeline used to augment unlabeled data into different views
unsup_pipeline = [
    dict(type='LoadImageFromFile', backend_args=backend_args),
    dict(type='LoadEmptyAnnotations'),
    dict(
        type='MultiBranch',
        unsup_teacher=weak_pipeline,
        unsup_student=strong_pipeline,
    )
]

```

### 3.12.3 Configure semi-supervised dataloader

(1) Build a semi-supervised dataset. Use `ConcatDataset` to concatenate labeled and unlabeled datasets.

```

labeled_dataset = dict(
    type=dataset_type,
    data_root=data_root,
    ann_file='annotations/instances_train2017.json',
    data_prefix=dict(img='train2017/'),
    filter_cfg=dict(filter_empty_gt=True, min_size=32),
    pipeline=sup_pipeline)

unlabeled_dataset = dict(
    type=dataset_type,
    data_root=data_root,
    ann_file='annotations/instances_unlabeled2017.json',
    data_prefix=dict(img='unlabeled2017/'),
    filter_cfg=dict(filter_empty_gt=False),
    pipeline=unsup_pipeline)

train_dataloader = dict(
    batch_size=batch_size,
    num_workers=num_workers,
    persistent_workers=True,
    sampler=dict(
        type='GroupMultiSourceSampler',
        batch_size=batch_size,
        source_ratio=[1, 4]),

```

(continues on next page)

(continued from previous page)

```
dataset=dict(
    type='ConcatDataset', datasets=[labeled_dataset, unlabeled_dataset]))
```

(2) Use multi-source dataset sampler. Use `GroupMultiSourceSampler` to sample data from batches from `labeled_dataset` and `unlabeled_dataset`, `source_ratio` controls the proportion of labeled data and unlabeled data in the batch. `GroupMultiSourceSampler` also ensures that the images in the same batch have similar aspect ratios. If you don't need to guarantee the aspect ratio of the images in the batch, you can use `MultiSourceSampler`. The sampling diagram of `GroupMultiSourceSampler` is as below:

`sup=1000` indicates that the scale of the labeled dataset is 1000, `sup_h=200` indicates that the scale of the images with an aspect ratio greater than or equal to 1 in the labeled dataset is 200, and `sup_w=800` indicates that the scale of the images with an aspect ratio less than 1 in the labeled dataset is 800, `unsup=9000` indicates that the scale of the unlabeled dataset is 9000, `unsup_h=1800` indicates that the scale of the images with an aspect ratio greater than or equal to 1 in the unlabeled dataset is 1800, and `unsup_w=7200` indicates the scale of the images with an aspect ratio less than 1 in the unlabeled dataset is 7200. `GroupMultiSourceSampler` randomly selects a group according to the overall aspect ratio distribution of the images in the labeled dataset and the unlabeled dataset, and then sample data to form batches from the two datasets according to `source_ratio`, so labeled datasets and unlabeled datasets have different repetitions.

### 3.12.4 Configure semi-supervised model

We choose Faster R-CNN as detector for semi-supervised training. Take the semi-supervised object detection algorithm `SoftTeacher` as an example, the model configuration can be inherited from `_base_/models/faster-rcnn_r50_fpn.py`, replacing the backbone network of the detector with `caffe` style. Note that unlike the supervised training configs, `Faster R-CNN` as detector is an attribute of `model`, not `model`. In addition, `data_preprocessor` needs to be set to `MultiBranchDataPreprocessor`, which is used to pad and normalize images from different pipelines. Finally, parameters required for semi-supervised training and testing can be configured via `semi_train_cfg` and `semi_test_cfg`.

```
_base_ = [
    '../_base_/models/faster-rcnn_r50_fpn.py', '../_base_/default_runtime.py',
    '../_base_/datasets/semi_coco_detection.py'
]

detector = _base_.model
detector.data_preprocessor = dict(
    type='DetDataPreprocessor',
    mean=[103.530, 116.280, 123.675],
    std=[1.0, 1.0, 1.0],
    bgr_to_rgb=False,
    pad_size_divisor=32)
detector.backbone = dict(
    type='ResNet',
    depth=50,
    num_stages=4,
    out_indices=(0, 1, 2, 3),
    frozen_stages=1,
    norm_cfg=dict(type='BN', requires_grad=False),
    norm_eval=True,
    style='caffe',
    init_cfg=dict(
        type='Pretrained',
```

(continues on next page)

(continued from previous page)

```

        checkpoint='open-mmlab://detectron2/resnet50_caffe'))

model = dict(
    _delete_=True,
    type='SoftTeacher',
    detector=detector,
    data_preprocessor=dict(
        type='MultiBranchDataPreprocessor',
        data_preprocessor=detector.data_preprocessor),
    semi_train_cfg=dict(
        freeze_teacher=True,
        sup_weight=1.0,
        unsup_weight=4.0,
        pseudo_label_initial_score_thr=0.5,
        rpn_pseudo_thr=0.9,
        cls_pseudo_thr=0.9,
        reg_pseudo_thr=0.02,
        jitter_times=10,
        jitter_scale=0.06,
        min_pseudo_bbox_wh=(1e-2, 1e-2)),
    semi_test_cfg=dict(predict_on='teacher'))

```

In addition, we also support semi-supervised training for other detection models, such as RetinaNet and Cascade R-CNN. Since SoftTeacher only supports Faster R-CNN, it needs to be replaced with SemiBaseDetector, example is as below:

```

_base_ = [
    '../_base_/models/retinanet_r50_fpn.py', '../_base_/default_runtime.py',
    '../_base_/datasets/semi_coco_detection.py'
]

detector = _base_.model

model = dict(
    _delete_=True,
    type='SemiBaseDetector',
    detector=detector,
    data_preprocessor=dict(
        type='MultiBranchDataPreprocessor',
        data_preprocessor=detector.data_preprocessor),
    semi_train_cfg=dict(
        freeze_teacher=True,
        sup_weight=1.0,
        unsup_weight=1.0,
        cls_pseudo_thr=0.9,
        min_pseudo_bbox_wh=(1e-2, 1e-2)),
    semi_test_cfg=dict(predict_on='teacher'))

```

Following the semi-supervised training configuration of SoftTeacher, change batch\_size to 2 and source\_ratio to [1, 1], the experimental results of supervised and semi-supervised training of RetinaNet, Faster R-CNN, Cascade R-CNN and SoftTeacher on the 10% coco train2017 are as below:

### 3.12.5 Configure MeanTeacherHook

Usually, the teacher model is updated by Exponential Moving Average (EMA) the student model, and then the teacher model is optimized with the optimization of the student model, which can be achieved by configuring `custom_hooks`:

```
custom_hooks = [dict(type='MeanTeacherHook')]
```

### 3.12.6 Configure TeacherStudentValLoop

Since there are two models in the teacher-student joint training framework, we can replace `ValLoop` with `TeacherStudentValLoop` to test the accuracy of both models during the training process.

```
val_cfg = dict(type='TeacherStudentValLoop')
```




## USEFUL TOOLS

Apart from training/testing scripts, We provide lots of useful tools under the `tools/` directory.

### 4.1 Log Analysis

`tools/analysis_tools/analyze_logs.py` plots loss/mAP curves given a training log file. Run `pip install seaborn` first to install the dependency.

```
python tools/analysis_tools/analyze_logs.py plot_curve [--keys KEYS] [--eval-interval  
→ EVALUATION_INTERVAL] [--title TITLE] [--legend LEGEND] [--backend BACKEND]  
→ [--style STYLE] [--out OUT_FILE]
```

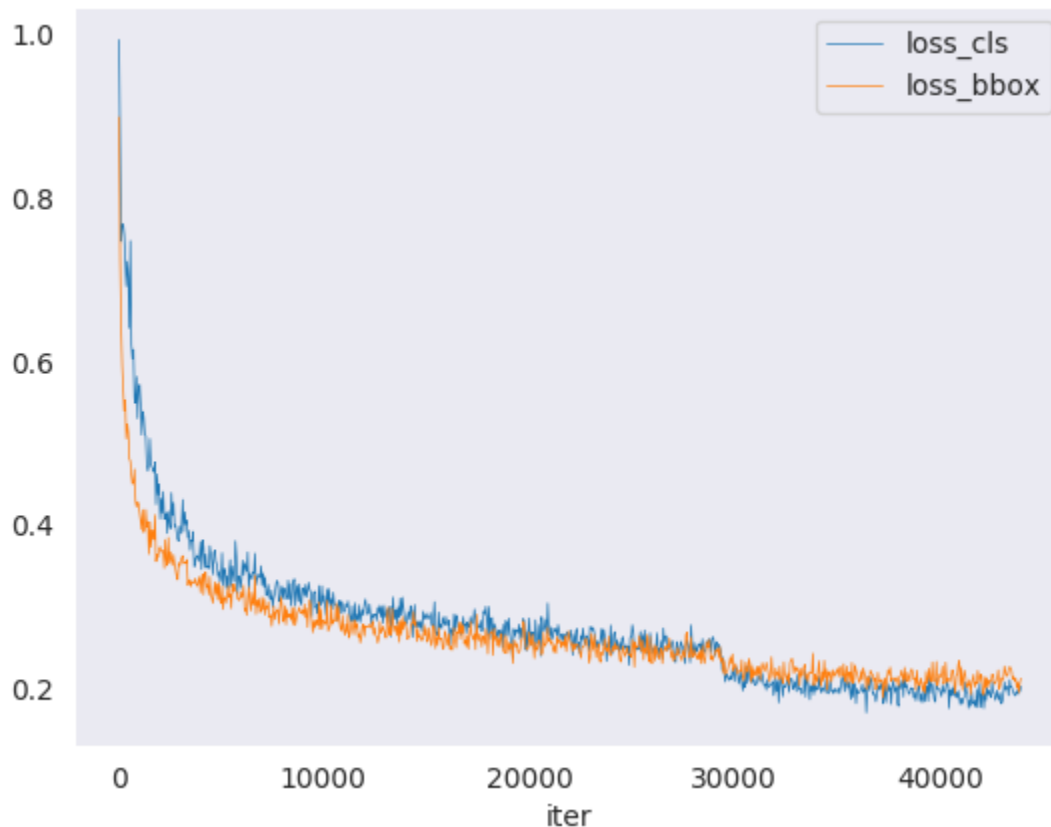

Examples:

- Plot the classification loss of some run.

```
python tools/analysis_tools/analyze_logs.py plot_curve log.json --keys loss_cls --
↳ legend loss_cls
```

- Plot the classification and regression loss of some run, and save the figure to a pdf.

```
python tools/analysis_tools/analyze_logs.py plot_curve log.json --keys loss_cls
↳ loss_bbox --out losses.pdf
```

- Compare the bbox mAP of two runs in the same figure.

```
python tools/analysis_tools/analyze_logs.py plot_curve log1.json log2.json --keys
↳ bbox_mAP --legend run1 run2
```

- Compute the average training speed.

```
python tools/analysis_tools/analyze_logs.py cal_train_time log.json [--include-
↳ outliers]
```

The output is expected to be like the following.

```
-----Analyze train time of work_dirs/some_exp/20190611_192040.log.json-----
slowest epoch 11, average time is 1.2024
fastest epoch 1, average time is 1.1909
time std over epochs is 0.0028
average iter time: 1.1959 s/iter
```

## 4.2 Result Analysis

`tools/analysis_tools/analyze_results.py` calculates single image mAP and saves or shows the topk images with the highest and lowest scores based on prediction results.

### Usage

```
python tools/analysis_tools/analyze_results.py \
    ${CONFIG} \
    ${PREDICTION_PATH} \
    ${SHOW_DIR} \
    [--show] \
    [--wait-time ${WAIT_TIME}] \
    [--topk ${TOPK}] \
    [--show-score-thr ${SHOW_SCORE_THR}] \
    [--cfg-options ${CFG_OPTIONS}]
```

Description of all arguments:

- `config`: The path of a model config file.
- `prediction_path`: Output result file in pickle format from `tools/test.py`
- `show_dir`: Directory where painted GT and detection images will be saved
- `--show`: Determines whether to show painted images, If not specified, it will be set to `False`
- `--wait-time`: The interval of show (s), 0 is block

- `--topk`: The number of saved images that have the highest and lowest topk scores after sorting. If not specified, it will be set to 20.
- `--show-score-thr`: Show score threshold. If not specified, it will be set to 0.
- `--cfg-options`: If specified, the key-value pair optional cfg will be merged into config file

**Examples:**

Assume that you have got result file in pickle format from `tools/test.py` in the path `./result.pkl`.

1. Test Faster R-CNN and visualize the results, save images to the directory `results/`

```
python tools/analysis_tools/analyze_results.py \
    configs/faster_rcnn/faster-rcnn_r50_fpn_1x_coco.py \
    result.pkl \
    results \
    --show
```

2. Test Faster R-CNN and specified topk to 50, save images to the directory `results/`

```
python tools/analysis_tools/analyze_results.py \
    configs/faster_rcnn/faster-rcnn_r50_fpn_1x_coco.py \
    result.pkl \
    results \
    --topk 50
```

3. If you want to filter the low score prediction results, you can specify the `show-score-thr` parameter

```
python tools/analysis_tools/analyze_results.py \
    configs/faster_rcnn/faster-rcnn_r50_fpn_1x_coco.py \
    result.pkl \
    results \
    --show-score-thr 0.3
```

## 4.3 Visualization

### 4.3.1 Visualize Datasets

`tools/analysis_tools/browse_dataset.py` helps the user to browse a detection dataset (both images and bounding box annotations) visually, or save the image to a designated directory.

```
python tools/misc/browse_dataset.py ${CONFIG} [-h] [--skip-type ${SKIP_TYPE}[SKIP_TYPE...  
↪]] [--output-dir ${OUTPUT_DIR}] [--not-show] [--show-interval ${SHOW_INTERVAL}]
```

### 4.3.2 Visualize Models

First, convert the model to ONNX as described here. Note that currently only RetinaNet is supported, support for other models will be coming in later versions. The converted model could be visualized by tools like [Netron](#).

### 4.3.3 Visualize Predictions

If you need a lightweight GUI for visualizing the detection results, you can refer [DetVisGUI](#) project.

## 4.4 Error Analysis

`tools/analysis_tools/coco_error_analysis.py` analyzes COCO results per category and by different criterion. It can also make a plot to provide useful information.

```
python tools/analysis_tools/coco_error_analysis.py ${RESULT} ${OUT_DIR} [-h] [--ann $
↪{ANN}] [--types ${TYPES[TYPES...]}]
```

Example:

Assume that you have got [Mask R-CNN checkpoint file](#) in the path ‘checkpoint’. For other checkpoints, please refer to our model zoo.

You can modify the `test_evaluator` to save the results bbox by:

1. Find which dataset in ‘configs/base/datasets’ the current config corresponds to.
2. Replace the original `test_evaluator` and `test_dataloader` with `test_evaluator` and `test_dataloader` in the comment in dataset config.
3. Use the following command to get the results bbox and segmentation json file.

```
python tools/test.py \
  configs/mask_rcnn/mask-rcnn_r50_fpn_1x_coco.py \
  checkpoint/mask_rcnn_r50_fpn_1x_coco_20200205-d4b0c5d6.pth \
```

1. Get COCO bbox error results per category , save analyze result images to the directory(In config the default directory is ‘./work\_dirs/coco\_instance/test’)

```
python tools/analysis_tools/coco_error_analysis.py \
  results.bbox.json \
  results \
  --ann=data/coco/annotations/instances_val2017.json \
```

2. Get COCO segmentation error results per category , save analyze result images to the directory

```
python tools/analysis_tools/coco_error_analysis.py \
  results.segm.json \
  results \
  --ann=data/coco/annotations/instances_val2017.json \
  --types='segm'
```

## 4.5 Model Serving

In order to serve an MMDetection model with [TorchServe](#), you can follow the steps:

### 4.5.1 1. Install TorchServe

Suppose you have a Python environment with PyTorch and MMDetection successfully installed, then you could run the following command to install TorchServe and its dependencies. For more other installation options, please refer to the [quick start](#).

```
python -m pip install torchserve torch-model-archiver torch-workflow-archiver nvgpu
```

**Note:** Please refer to [torchserve docker](#) if you want to use TorchServe in docker.

### 4.5.2 2. Convert model from MMDetection to TorchServe

```
python tools/deployment/mmdet2torchserve.py ${CONFIG_FILE} ${CHECKPOINT_FILE} \
--output-folder ${MODEL_STORE} \
--model-name ${MODEL_NAME}
```

### 4.5.3 3. Start TorchServe

```
torchserve --start --ncs \
--model-store ${MODEL_STORE} \
--models ${MODEL_NAME}.mar
```

### 4.5.4 4. Test deployment

```
curl -O curl -O https://raw.githubusercontent.com/pytorch/serve/master/docs/images/3dogs.
↪ jpg
curl http://127.0.0.1:8080/predictions/${MODEL_NAME} -T 3dogs.jpg
```

You should obtain a response similar to:

```
[
  {
    "class_label": 16,
    "class_name": "dog",
    "bbox": [
      294.63409423828125,
      203.99111938476562,
      417.048583984375,
      281.62744140625
    ],
    "score": 0.9987992644309998
  },
  {
    "class_label": 16,
```

(continues on next page)

(continued from previous page)

```

    "class_name": "dog",
    "bbox": [
        404.26019287109375,
        126.0080795288086,
        574.5091552734375,
        293.6662292480469
    ],
    "score": 0.9979367256164551
},
{
    "class_label": 16,
    "class_name": "dog",
    "bbox": [
        197.2144775390625,
        93.3067855834961,
        307.8505554199219,
        276.7560119628906
    ],
    "score": 0.993338406085968
}
]

```

## Compare results

And you can use `test_torchserver.py` to compare result of TorchServe and PyTorch, and visualize them.

```

python tools/deployment/test_torchserver.py ${IMAGE_FILE} ${CONFIG_FILE} ${CHECKPOINT_
↪FILE} ${MODEL_NAME}
[--inference-addr ${INFERENCE_ADDR}] [--device ${DEVICE}] [--score-thr ${SCORE_THR}] [--
↪work-dir ${WORK_DIR}]

```

Example:

```

python tools/deployment/test_torchserver.py \
demo/demo.jpg \
configs/yolo/yolov3_d53_8xb8-320-273e_coco.py \
checkpoint/yolov3_d53_320_273e_coco-421362b6.pth \
yolov3 \
--work-dir ./work-dir

```

## 4.5.5 5. Stop TorchServe

```
torchserve --stop
```

## 4.6 Model Complexity

`tools/analysis_tools/get_flops.py` is a script adapted from [flops-counter.pytorch](#) to compute the FLOPs and params of a given model.

```
python tools/analysis_tools/get_flops.py ${CONFIG_FILE} [--shape ${INPUT_SHAPE}]
```

You will get the results like this.

```
=====
Input shape: (3, 1280, 800)
Flops: 239.32 GFLOPs
Params: 37.74 M
=====
```

**Note:** This tool is still experimental and we do not guarantee that the number is absolutely correct. You may well use the result for simple comparisons, but double check it before you adopt it in technical reports or papers.

1. FLOPs are related to the input shape while parameters are not. The default input shape is (1, 3, 1280, 800).
2. Some operators are not counted into FLOPs like GN and custom operators. Refer to [mmdcv.cnn.get\\_model\\_complexity\\_info\(\)](#) for details.
3. The FLOPs of two-stage detectors is dependent on the number of proposals.

## 4.7 Model conversion

### 4.7.1 MMDetection model to ONNX

We provide a script to convert model to [ONNX](#) format. We also support comparing the output results between Pytorch and ONNX model for verification. More details can refer to [mmdeploy](#)

### 4.7.2 MMDetection 1.x model to MMDetection 2.x

`tools/model_converters/upgrade_model_version.py` upgrades a previous MMDetection checkpoint to the new version. Note that this script is not guaranteed to work as some breaking changes are introduced in the new version. It is recommended to directly use the new checkpoints.

```
python tools/model_converters/upgrade_model_version.py ${IN_FILE} ${OUT_FILE} [-h] [--
  ↪ num-classes NUM_CLASSES]
```

### 4.7.3 RegNet model to MMDetection

`tools/model_converters/regnet2mmdet.py` convert keys in pyccls pretrained RegNet models to MMDetection style.

```
python tools/model_converters/regnet2mmdet.py ${SRC} ${DST} [-h]
```

### 4.7.4 Detectron ResNet to Pytorch

`tools/model_converters/detectron2pytorch.py` converts keys in the original detectron pretrained ResNet models to PyTorch style.

```
python tools/model_converters/detectron2pytorch.py ${SRC} ${DST} ${DEPTH} [-h]
```

### 4.7.5 Prepare a model for publishing

`tools/model_converters/publish_model.py` helps users to prepare their model for publishing.

Before you upload a model to AWS, you may want to

1. convert model weights to CPU tensors
2. delete the optimizer states and
3. compute the hash of the checkpoint file and append the hash id to the filename.

```
python tools/model_converters/publish_model.py ${INPUT_FILENAME} ${OUTPUT_FILENAME}
```

E.g.,

```
python tools/model_converters/publish_model.py work_dirs/faster_rcnn/latest.pth faster_
↪rcnn_r50_fpn_1x_20190801.pth
```

The final output filename will be `faster_rcnn_r50_fpn_1x_20190801-{hash id}.pth`.

## 4.8 Dataset Conversion

`tools/data_converters/` contains tools to convert the Cityscapes dataset and Pascal VOC dataset to the COCO format.

```
python tools/dataset_converters/cityscapes.py ${CITYSCAPES_PATH} [-h] [--img-dir ${IMG_
↪DIR}] [--gt-dir ${GT_DIR}] [-o ${OUT_DIR}] [--nproc ${NPROC}]
python tools/dataset_converters/pascal_voc.py ${DEVKIT_PATH} [-h] [-o ${OUT_DIR}]
```

## 4.9 Dataset Download

`tools/misc/download_dataset.py` supports downloading datasets such as COCO, VOC, and LVIS.

```
python tools/misc/download_dataset.py --dataset-name coco2017
python tools/misc/download_dataset.py --dataset-name voc2007
python tools/misc/download_dataset.py --dataset-name lvis
```

For users in China, these datasets can also be downloaded from [OpenDataLab](#) with high speed:

- [COCO2017](#)
- [VOC2007](#)
- [VOC2012](#)
- [LVIS](#)

## 4.10 Benchmark

### 4.10.1 Robust Detection Benchmark

`tools/analysis_tools/test_robustness.py` and `tools/analysis_tools/robustness_eval.py` helps users to evaluate model robustness. The core idea comes from [Benchmarking Robustness in Object Detection: Autonomous Driving when Winter is Coming](#). For more information how to evaluate models on corrupted images and results for a set of standard models please refer to [robustness\\_benchmarking.md](#).

### 4.10.2 FPS Benchmark

`tools/analysis_tools/benchmark.py` helps users to calculate FPS. The FPS value includes model forward and post-processing. In order to get a more accurate value, currently only supports single GPU distributed startup mode.

```
python -m torch.distributed.launch --nproc_per_node=1 --master_port=${PORT} tools/
↳ analysis_tools/benchmark.py \
    ${CONFIG} \
    [--checkpoint ${CHECKPOINT}] \
    [--repeat-num ${REPEAT_NUM}] \
    [--max-iter ${MAX_ITER}] \
    [--log-interval ${LOG_INTERVAL}] \
    --launcher pytorch
```

Examples: Assuming that you have already downloaded the Faster R-CNN model checkpoint to the directory `checkpoints/`.

```
python -m torch.distributed.launch --nproc_per_node=1 --master_port=29500 tools/analysis_
↳ tools/benchmark.py \
    configs/faster_rcnn/faster-rcnn_r50_fpn_1x_coco.py \
    checkpoints/faster_rcnn_r50_fpn_1x_coco_20200130-047c8118.pth \
    --launcher pytorch
```

## 4.11 Miscellaneous

### 4.11.1 Evaluating a metric

`tools/analysis_tools/eval_metric.py` evaluates certain metrics of a pkl result file according to a config file.

```
python tools/analysis_tools/eval_metric.py ${CONFIG} ${PKL_RESULTS} [-h] [--format-only]
↳ [--eval ${EVAL[EVAL ...]}]
    [--cfg-options ${CFG_OPTIONS} [CFG_OPTIONS ...]]
    [--eval-options ${EVAL_OPTIONS} [EVAL_OPTIONS ...]]
```

### 4.11.2 Print the entire config

`tools/misc/print_config.py` prints the whole config verbatim, expanding all its imports.

```
python tools/misc/print_config.py ${CONFIG} [-h] [--options ${OPTIONS} [OPTIONS...]]
```

## 4.12 Hyper-parameter Optimization

### 4.12.1 YOLO Anchor Optimization

`tools/analysis_tools/optimize_anchors.py` provides two method to optimize YOLO anchors.

One is k-means anchor cluster which refers from [darknet](#).

```
python tools/analysis_tools/optimize_anchors.py ${CONFIG} --algorithm k-means --input-  
↪shape ${INPUT_SHAPE [WIDTH HEIGHT]} --output-dir ${OUTPUT_DIR}
```

Another is using differential evolution to optimize anchors.

```
python tools/analysis_tools/optimize_anchors.py ${CONFIG} --algorithm differential_
↵evolution --input-shape ${INPUT_SHAPE [WIDTH HEIGHT]} --output-dir ${OUTPUT_DIR}
```

E.g.,

```
python tools/analysis_tools/optimize_anchors.py configs/yolo/yolov3_d53_8xb8-320-273e_
└─coco.py --algorithm differential_evolution --input-shape 608 608 --device cuda --
└─output-dir work_dirs
```

You will get:

```
loading annotations into memory...
Done (t=9.70s)
creating index...
index created!
2021-07-19 19:37:20,951 - mmdet - INFO - Collecting bboxes from annotation...
[>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>] 117266/117266, 15874.5 task/s,  
└─elapsed: 7s, ETA:      0s

2021-07-19 19:37:28,753 - mmdet - INFO - Collected 849902 bboxes.
differential_evolution step 1: f(x)= 0.506055
differential_evolution step 2: f(x)= 0.506055
.....

differential_evolution step 489: f(x)= 0.386625
2021-07-19 19:46:40,775 - mmdet - INFO Anchor evolution finish. Average IOU: 0.
└─6133754253387451
2021-07-19 19:46:40,776 - mmdet - INFO Anchor differential evolution result:[[10, 12],  
└─[15, 30], [32, 22], [29, 59], [61, 46], [57, 116], [112, 89], [154, 198], [349, 336]]
2021-07-19 19:46:40,798 - mmdet - INFO Result saved in work_dirs/anchor_optimize_result.  
└─json
```

## 4.13 Confusion Matrix

A confusion matrix is a summary of prediction results.


`tools/analysis_tools/confusion_matrix.py` can analyze the prediction results and plot a confusion matrix table.

First, run `tools/test.py` to save the `.pkl` detection results.

Then, run

```
python tools/analysis_tools/confusion_matrix.py ${CONFIG} ${DETECTION_RESULTS} ${SAVE_
  DIR} --show
```

And you will get a confusion matrix like this:

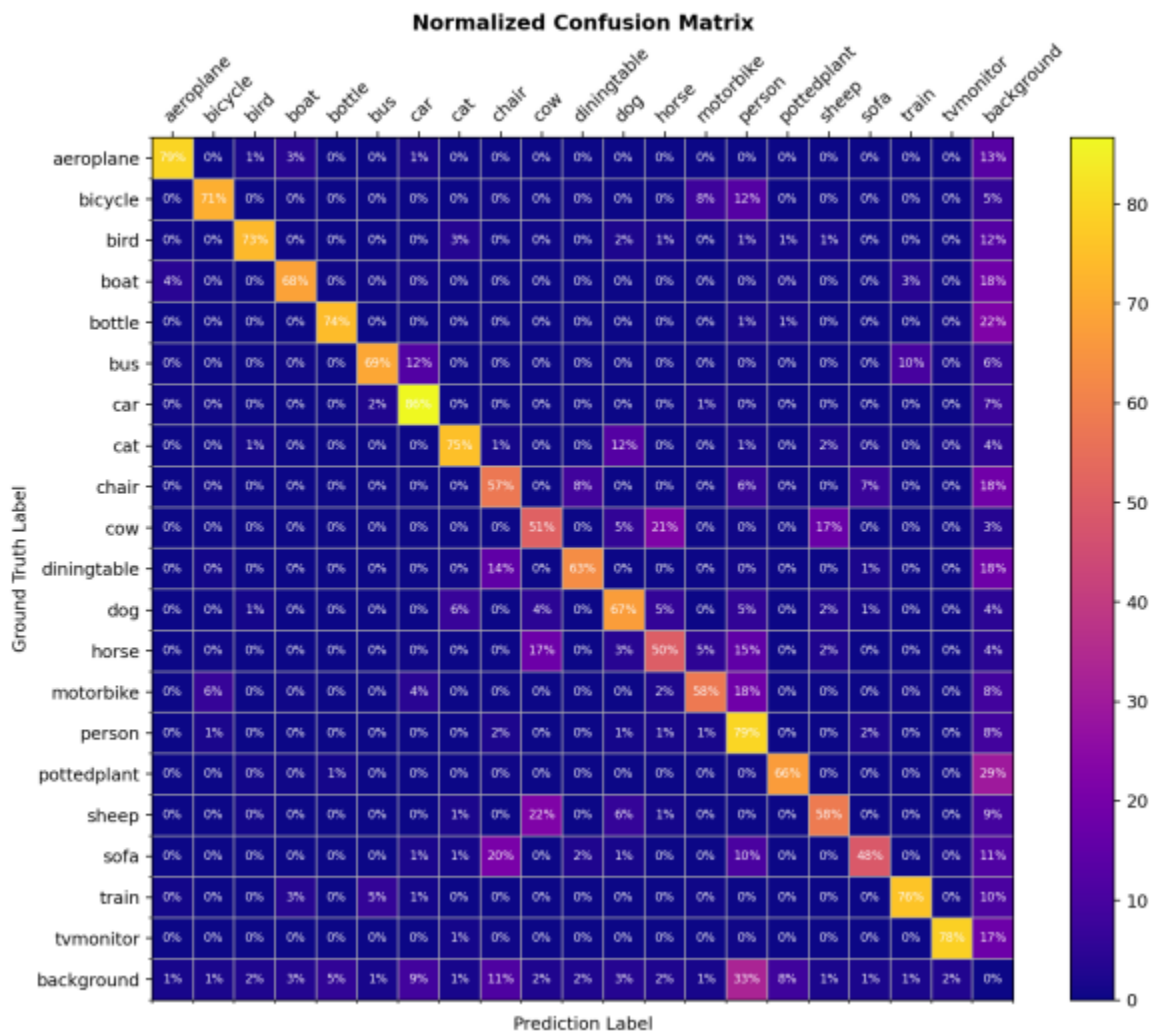

#### 4.14 COCO Separated & Occluded Mask Metric

Detecting occluded objects still remains a challenge for state-of-the-art object detectors. We implemented the metric presented in paper [A Tri-Layer Plugin to Improve Occluded Detection](#) to calculate the recall of separated and occluded masks.

There are two ways to use this metric:

### 4.14.1 Offline evaluation

We provide a script to calculate the metric with a dumped prediction file.

First, use the `tools/test.py` script to dump the detection results:

```
python tools/test.py ${CONFIG} ${MODEL_PATH} --out results.pkl
```

Then, run the `tools/analysis_tools/coco_occluded_separated_recall.py` script to get the recall of separated and occluded masks:

```
python tools/analysis_tools/coco_occluded_separated_recall.py results.pkl --out occluded_
↳ separated_recall.json
```

The output should be like this:

```
loading annotations into memory...
Done (t=0.51s)
creating index...
index created!
processing detection results...
[>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>] 5000/5000, 109.3 task/s, elapsed:~
~46s, ETA:      0s
computing occluded mask recall...
[>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>] 5550/5550, 780.5 task/s, elapsed:~
~7s, ETA:       0s
COCO occluded mask recall: 58.79%
COCO occluded mask success num: 3263
computing separated mask recall...
[>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>] 3522/3522, 778.3 task/s, elapsed:~
~5s, ETA:       0s
COCO separated mask recall: 31.94%
COCO separated mask success num: 1125

+-----+-----+-----+
| mask type | recall | num correct |
+-----+-----+-----+
| occluded  | 58.79% | 3263        |
| separated | 31.94% | 1125        |
+-----+-----+-----+
Evaluation results have been saved to occluded_separated_recall.json.
```

### 4.14.2 Online evaluation

We implement `CocoOccludedSeparatedMetric` which inherits from the `CocoMetric`. To evaluate the recall of separated and occluded masks during training, just replace the evaluator metric type with `'CocoOccludedSeparatedMetric'` in your config:

```
val_evaluator = dict(
    type='CocoOccludedSeparatedMetric', # modify this
    ann_file=data_root + 'annotations/instances_val2017.json',
    metric=['bbox', 'segm'],
    format_only=False)
test_evaluator = val_evaluator
```

Please cite the paper if you use this metric:

```
@article{zhan2022triocc,
  title={A Tri-Layer Plugin to Improve Occluded Detection},
  author={Zhan, Guanqi and Xie, Weidi and Zisserman, Andrew},
  journal={British Machine Vision Conference},
  year={2022}
}
```

## 4.15 Useful Hooks

MMDetection and MMEngine provide users with various useful hooks including log hooks, `NumClassCheckHook`, etc. This tutorial introduces the functionalities and usages of hooks implemented in MMDetection. For using hooks in MMEngine, please read the [API documentation in MMEngine](#).

### 4.15.1 CheckInvalidLossHook

### 4.15.2 NumClassCheckHook

### 4.15.3 MemoryProfilerHook

[Memory profiler hook](#) records memory information including virtual memory, swap memory, and the memory of the current process. This hook helps grasp the memory usage of the system and discover potential memory leak bugs. To use this hook, users should install `memory_profiler` and `psutil` by `pip install memory_profiler psutil` first.

#### Usage

To use this hook, users should add the following code to the config file.

```
custom_hooks = [
    dict(type='MemoryProfilerHook', interval=50)
]
```

## Result

During training, you can see the messages in the log recorded by MemoryProfilerHook as below.

The system has 250 GB (246360 MB + 9407 MB) of memory and 8 GB (5740 MB + 2452 MB) of ↵  
 ↵swap memory in total. Currently 9407 MB (4.4%) of memory and 5740 MB (29.9%) of swap ↵  
 ↵memory were consumed. And the current training process consumed 5434 MB of memory.

2022-04-21 08:49:56,881 - mmengine - INFO - Memory information available\_memory: 246360 ↵  
 ↵MB, used\_memory: 9407 MB, memory\_utilization: 4.4 %, available\_swap\_memory: 5740 MB, ↵  
 ↵used\_swap\_memory: 2452 MB, swap\_memory\_utilization: 29.9 %, current\_process\_memory: ↵  
 ↵5434 MB

### 4.15.4 SetEpochInfoHook

### 4.15.5 SyncNormHook

### 4.15.6 SyncRandomSizeHook

### 4.15.7 YOLOXLrUpdaterHook

### 4.15.8 YOLOXModeSwitchHook

### 4.15.9 How to implement a custom hook

In general, there are 20 points where hooks can be inserted from the beginning to the end of model training. The users can implement custom hooks and insert them at different points in the process of training to do what they want.

- global points: before\_run, after\_run
- points in training: before\_train, before\_train\_epoch, before\_train\_iter, after\_train\_iter, after\_train\_epoch, after\_train
- points in validation: before\_val, before\_val\_epoch, before\_val\_iter, after\_val\_iter, after\_val\_epoch, after\_val
- points at testing: before\_test, before\_test\_epoch, before\_test\_iter, after\_test\_iter, after\_test\_epoch, after\_test
- other points: before\_save\_checkpoint, after\_save\_checkpoint

For example, users can implement a hook to check loss and terminate training when loss goes NaN. To achieve that, there are three steps to go:

1. Implement a new hook that inherits the Hook class in MMEngine, and implement after\_train\_iter method which checks whether loss goes NaN after every n training iterations.
2. The implemented hook should be registered in HOOKS by @HOOKS.register\_module() as shown in the code below.
3. Add custom\_hooks = [dict(type='MemoryProfilerHook', interval=50)] in the config file.

```
from typing import Optional
import torch
```

(continues on next page)

(continued from previous page)

```

from mmengine.hooks import Hook
from mmengine.runner import Runner

from mmdet.registry import HOOKS

@HOOKS.register_module()
class CheckInvalidLossHook(Hook):
    """Check invalid loss hook.

    This hook will regularly check whether the loss is valid
    during training.

    Args:
        interval (int): Checking interval (every k iterations).
            Default: 50.
    """

    def __init__(self, interval: int = 50) -> None:
        self.interval = interval

    def after_train_iter(self,
                        runner: Runner,
                        batch_idx: int,
                        data_batch: Optional[dict] = None,
                        outputs: Optional[dict] = None) -> None:
        """Regularly check whether the loss is valid every n iterations.

        Args:
            runner (:obj:`Runner`): The runner of the training process.
            batch_idx (int): The index of the current batch in the train loop.
            data_batch (dict, Optional): Data from dataloader.
                Defaults to None.
            outputs (dict, Optional): Outputs from model. Defaults to None.
        """
        if self.every_n_train_iters(runner, self.interval):
            assert torch.isfinite(outputs['loss']), \
                runner.logger.info('loss become infinite or NaN!')

```

Please read *customize\_runtime* for more about implementing a custom hook.

## 4.16 Visualization

Before reading this tutorial, it is recommended to read MMEEngine's [Visualization](#) documentation to get a first glimpse of the Visualizer definition and usage.

In brief, the Visualizer is implemented in MMEEngine to meet the daily visualization needs, and contains three main functions:

- Implement common drawing APIs, such as `draw_bboxes` which implements bounding box drawing functions, `draw_lines` implements the line drawing function.

- Support writing visualization results, learning rate curves, loss function curves, and verification accuracy curves to various backends, including local disks and common deep learning training logging tools such as [TensorBoard](#) and [Wandb](#).
- Support calling anywhere in the code to visualize or record intermediate states of the model during training or testing, such as feature maps and validation results.

Based on MMEngine's Visualizer, MMDet comes with a variety of pre-built visualization tools that can be used by the user by simply modifying the following configuration files.

- The `tools/analysis_tools/browse_dataset.py` script provides a dataset visualization function that draws images and corresponding annotations after Data Transforms, as described in `browse_dataset.py`.
- MMEngine implements `LoggerHook`, which uses `Visualizer` to write the learning rate, loss and evaluation results to the backend set by `Visualizer`. Therefore, by modifying the `Visualizer` backend in the configuration file, for example to `TensorBoardVISBackend` or `WandbVISBackend`, you can implement logging to common training logging tools such as `TensorBoard` or `WandB`, thus making it easy for users to use these visualization tools to analyze and monitor the training process.
- The `VisualizerHook` is implemented in `MMDet`, which uses the `Visualizer` to visualize or store the prediction results of the validation or prediction phase into the backend set by the `Visualizer`, so by modifying the `Visualizer` backend in the configuration file, for example, to `TensorBoardVISBackend` or `WandbVISBackend`, you can implement storing the predicted images to `TensorBoard` or `Wandb`.

### 4.16.1 Configuration

Thanks to the use of the registration mechanism, in `MMDet` we can set the behavior of the `Visualizer` by modifying the configuration file. Usually, we define the default configuration for the visualizer in `configs/_base_/default_runtime.py`, see [configuration tutorial](#) for details.

```
vis_backends = [dict(type='LocalVisBackend')]
visualizer = dict(
    type='DetLocalVisualizer',
    vis_backends=vis_backends,
    name='visualizer')
```

Based on the above example, we can see that the configuration of `Visualizer` consists of two main parts, namely, the type of `Visualizer` and the visualization backend `vis_backends` it uses.

- Users can directly use `DetLocalVisualizer` to visualize labels or predictions for support tasks.
- `MMDet` sets the visualization backend `vis_backend` to the local visualization backend `LocalVisBackend` by default, saving all visualization results and other training information in a local folder.

### 4.16.2 Storage

`MMDet` uses the local visualization backend `LocalVisBackend` by default, and the model loss, learning rate, model evaluation accuracy and visualization The information stored in `VisualizerHook` and `LoggerHook`, including loss, learning rate, evaluation accuracy will be saved to the `{work_dir}/{config_name}/{time}/{vis_data}` folder by default. In addition, `MMDet` also supports other common visualization backends, such as `TensorboardVisBackend` and `WandbVisBackend`, and you only need to change the `vis_backends` type in the configuration file to the corresponding visualization backend. For example, you can store data to `TensorBoard` and `Wandb` by simply inserting the following code block into the configuration file.

```
# https://mmdetection.readthedocs.io/en/latest/api/visualization.html
_base_.visualizer.vis_backends = [
    dict(type='LocalVisBackend'), #
    dict(type='TensorboardVisBackend'),
    dict(type='WandbVisBackend'),]
```

### 4.16.3 Plot

#### Plot the prediction results

MMDet mainly uses `DetVisualizationHook` to plot the prediction results of validation and test, by default `DetVisualizationHook` is off, and the default configuration is as follows.

```
visualization=dict( # user visualization of validation and test results
    type='DetVisualizationHook',
    draw=False,
    interval=1,
    show=False)
```

The following table shows the parameters supported by `DetVisualizationHook`.

If you want to enable `DetVisualizationHook` related functions and configurations during training or testing, you only need to modify the configuration, take `configs/rtdet/rtdet_tiny_8xb32-300e_coco.py` as an example, draw annotations and predictions at the same time, and display the images, the configuration can be modified as follows

```
visualization = _base_.default_hooks.visualization
visualization.update(dict(draw=True, show=True))
```

The `test.py` procedure is further simplified by providing the `--show` and `--show-dir` parameters to visualize the annotation and prediction results during the test without modifying the configuration.

```
# Show test results
python tools/test.py configs/rtdet/rtdet_tiny_8xb32-300e_coco.py https://download.
    ↪openmmlab.com/mmdetection/v3.0/rtdet/rtdet_tiny_8xb32-300e_coco/rtdet_tiny_8xb32-
    ↪300e_coco_20220902_112414-78e30dcc.pth --show

# Specify where to store the prediction results
python tools/test.py configs/rtdet/rtdet_tiny_8xb32-300e_coco.py https://download.
    ↪openmmlab.com/mmdetection/v3.0/rtdet/rtdet_tiny_8xb32-300e_coco/rtdet_tiny_8xb32-
    ↪300e_coco_20220902_112414-78e30dcc.pth --show-dir imgs/
```

## 4.17 Corruption Benchmarking

### 4.17.1 Introduction

We provide tools to test object detection and instance segmentation models on the image corruption benchmark defined in [Benchmarking Robustness in Object Detection: Autonomous Driving when Winter is Coming](#). This page provides basic tutorials how to use the benchmark.

```
@article{michaelis2019winter,
  title={Benchmarking Robustness in Object Detection:
    Autonomous Driving when Winter is Coming},
  author={Michaelis, Claudio and Mitzkus, Benjamin and
    Geirhos, Robert and Rusak, Evgenia and
    Bringmann, Oliver and Ecker, Alexander S. and
    Bethge, Matthias and Brendel, Wieland},
  journal={arXiv:1907.07484},
  year={2019}
}
```



### 4.17.2 About the benchmark

To submit results to the benchmark please visit the [benchmark homepage](#)

The benchmark is modelled after the [imagenet-c benchmark](#) which was originally published in [Benchmarking Neural Network Robustness to Common Corruptions and Perturbations](#) (ICLR 2019) by Dan Hendrycks and Thomas Dietterich.

The image corruption functions are included in this library but can be installed separately using:

```
pip install imagecorruptions
```

Compared to imagenet-c a few changes had to be made to handle images of arbitrary size and greyscale images. We also modified the ‘motion blur’ and ‘snow’ corruptions to remove dependency from a linux specific library, which would have to be installed separately otherwise. For details please refer to the [imagecorruptions repository](#).

### 4.17.3 Inference with pretrained models

We provide a testing script to evaluate a models performance on any combination of the corruptions provided in the benchmark.

#### Test a dataset

- [x] single GPU testing
- [ ] multiple GPU testing
- [ ] visualize detection results

You can use the following commands to test a models performance under the 15 corruptions used in the benchmark.

```
# single-gpu testing
python tools/analysis_tools/test_robustness.py ${CONFIG_FILE} ${CHECKPOINT_FILE} [--out $
↪{RESULT_FILE}]
```

Alternatively different group of corruptions can be selected.

```
# noise
python tools/analysis_tools/test_robustness.py ${CONFIG_FILE} ${CHECKPOINT_FILE} [--out $
↪{RESULT_FILE}] --corruptions noise

# blur
python tools/analysis_tools/test_robustness.py ${CONFIG_FILE} ${CHECKPOINT_FILE} [--out $
↪{RESULT_FILE}] --corruptions blur

# wetaher
python tools/analysis_tools/test_robustness.py ${CONFIG_FILE} ${CHECKPOINT_FILE} [--out $
↪{RESULT_FILE}] --corruptions weather

# digital
python tools/analysis_tools/test_robustness.py ${CONFIG_FILE} ${CHECKPOINT_FILE} [--out $
↪{RESULT_FILE}] --corruptions digital
```

Or a costum set of corruptions e.g.:

```
# gaussian noise, zoom blur and snow
python tools/analysis_tools/test_robustness.py ${CONFIG_FILE} ${CHECKPOINT_FILE} [--out $
↪{RESULT_FILE}] [--eval ${EVAL_METRICS}] --corruptions gaussian_noise zoom_blur snow
```

Finally the corruption severities to evaluate can be chosen. Severity 0 corresponds to clean data and the effect increases from 1 to 5.

```
# severity 1
python tools/analysis_tools/test_robustness.py ${CONFIG_FILE} ${CHECKPOINT_FILE} [--out $
↪{RESULT_FILE}] [--eval ${EVAL_METRICS}] --severities 1

# severities 0,2,4
python tools/analysis_tools/test_robustness.py ${CONFIG_FILE} ${CHECKPOINT_FILE} [--out $
↪{RESULT_FILE}] [--eval ${EVAL_METRICS}] --severities 0 2 4
```

#### 4.17.4 Results for modelzoo models

The results on COCO 2017val are shown in the below table.

Results may vary slightly due to the stochastic application of the corruptions.

### 4.18 Model Deployment

The deployment of OpenMMLab codebases, including MMDetection, MMClassification and so on are supported by [MMDeploy](#). The latest deployment guide for MMDetection can be found from [here](#).

This tutorial is organized as follows:

- *Installation*
- *Convert model*
- *Model specification*
- *Model inference*
  - *Backend model inference*
  - *SDK model inference*
- *Supported models*

#### 4.18.1 Installation

Please follow the [guide](#) to install mmdet. And then install mmdet from source by following [this](#) guide.

---

**Note:** If you install mmdet prebuilt package, please also clone its repository by 'git clone https://github.com/open-mmlab/mmdet.git -depth=1' to get the deployment config files.

---

#### 4.18.2 Convert model

Suppose mmdet and mmdet repositories are in the same directory, and the working directory is the root path of mmdet.

Take [Faster R-CNN](#) model as an example. You can download its checkpoint from [here](#), and then convert it to onnx model as follows:

```
from mmdet.apis import torch2onnx
from mmdet.backend.sdk.export_info import export2SDK

img = 'demo/demo.jpg'
work_dir = 'mmdet_models/mmdet/onnx'
save_file = 'end2end.onnx'
deploy_cfg = '../mmdet/configs/mmdet/detection/detection_onnxruntime_dynamic.py'
model_cfg = 'configs/faster_rcnn/faster-rcnn_r50_fpn_1x_coco.py'
model_checkpoint = 'faster_rcnn_r50_fpn_1x_coco_20200130-047c8118.pth'
device = 'cpu'
```

(continues on next page)

(continued from previous page)

```
# 1. convert model to onnx
torch2onnx(img, work_dir, save_file, deploy_cfg, model_cfg,
            model_checkpoint, device)

# 2. extract pipeline info for inference by MMDeploy SDK
export2SDK(deploy_cfg, model_cfg, work_dir,.pth=model_checkpoint,
            device=device)
```

It is crucial to specify the correct deployment config during model conversion. MMDeploy has already provided builtin deployment config files of all supported backends for mmdetection, under which the config file path follows the pattern:

```
{task}/{task}_{backend}-{precision}_{static | dynamic}_{shape}.py
```

- **{task}**: task in mmdetection.

There are two of them. One is `detection` and the other is `instance-seg`, indicating instance segmentation.

mmdet models like RetinaNet, Faster R-CNN and DETR and so on belongs to `detection` task. While Mask R-CNN is one of `instance-seg` models.

**DO REMEMBER TO USE** `detection/detection_*.py` deployment config file when trying to convert detection models and use `instance-seg/instance-seg_*.py` to deploy instance segmentation models.

- **{backend}**: inference backend, such as `onnxruntime`, `tensorrt`, `pplnn`, `ncnn`, `openvino`, `coreml` etc.
- **{precision}**: `fp16`, `int8`. When it's empty, it means `fp32`
- **{static | dynamic}**: `static` shape or `dynamic` shape
- **{shape}**: input shape or shape range of a model

Therefore, in the above example, you can also convert Faster R-CNN to `tensorrt-fp16` model by `detection_tensorrt-fp16_dynamic-320x320-1344x1344.py`.

---

**Tip:** When converting mmdet models to tensorrt models, `-device` should be set to “`cuda`”

---

### 4.18.3 Model specification

Before moving on to model inference chapter, let's know more about the converted model structure which is very important for model inference.

The converted model locates in the working directory like `mmdeploy_models/mmdet/onnx` in the previous example. It includes:

```
mmdeploy_models/mmdet/onnx
├── deploy.json
├── detail.json
├── end2end.onnx
└── pipeline.json
```

in which,

- **end2end.onnx**: backend model which can be inferred by ONNX Runtime
- **xxx.json**: the necessary information for mmdeploy SDK

The whole package `mmdeploy_models/mmdet/onnx` is defined as **mmdeploy SDK model**, i.e., **mmdeploy SDK model** includes both backend model and inference meta information.

## 4.18.4 Model inference

### Backend model inference

Take the previous converted `end2end.onnx` model as an example, you can use the following code to inference the model and visualize the results.

```
from mmdeploy.apis.utils import build_task_processor
from mmdeploy.utils import get_input_shape, load_config
import torch

deploy_cfg = '../mmdeploy/configs/mmdet/detection/detection_onnxruntime_dynamic.py'
model_cfg = 'configs/faster_rcnn/faster-rcnn_r50_fpn_1x_coco.py'
device = 'cpu'
backend_model = ['mmdeploy_models/mmdet/onnx/end2end.onnx']
image = 'demo/demo.jpg'

# read deploy_cfg and model_cfg
deploy_cfg, model_cfg = load_config(deploy_cfg, model_cfg)

# build task and backend model
task_processor = build_task_processor(model_cfg, deploy_cfg, device)
model = task_processor.build_backend_model(backend_model)

# process input image
input_shape = get_input_shape(deploy_cfg)
model_inputs, _ = task_processor.create_input(image, input_shape)

# do model inference
with torch.no_grad():
    result = model.test_step(model_inputs)

# visualize results
task_processor.visualize(
    image=image,
    model=model,
    result=result[0],
    window_name='visualize',
    output_file='output_detection.png')
```

## SDK model inference

You can also perform SDK model inference like following,

```
from mmdet_python import Detector
import cv2

img = cv2.imread('demo/demo.jpg')

# create a detector
detector = Detector(model_path='mmdet_models/mmdet/onnx',
                    device_name='cpu', device_id=0)

# perform inference
bboxes, labels, masks = detector(img)

# visualize inference result
indices = [i for i in range(len(bboxes))]
for index, bbox, label_id in zip(indices, bboxes, labels):
    [left, top, right, bottom], score = bbox[0:4].astype(int), bbox[4]
    if score < 0.3:
        continue

    cv2.rectangle(img, (left, top), (right, bottom), (0, 255, 0))

cv2.imwrite('output_detection.png', img)
```

Besides python API, mmdet SDK also provides other FFI (Foreign Function Interface), such as C, C++, C#, Java and so on. You can learn their usage from [demos](#).

### 4.18.5 Supported models

Please refer to [here](#) for the supported model list.

## 4.19 Semi-automatic Object Detection Annotation with MMDetection and Label-Studio

Annotation data is a time-consuming and laborious task. This article introduces how to perform semi-automatic annotation using the RTMDet algorithm in MMDetection in conjunction with Label-Studio software. Specifically, using RTMDet to predict image annotations and then refining the annotations with Label-Studio. Community users can refer to this process and methodology and apply it to other fields.

- RTMDet: RTMDet is a high-precision single-stage object detection algorithm developed by OpenMMLab, open-sourced in the MMDetection object detection toolbox. Its open-source license is Apache 2.0, and it can be used freely without restrictions by industrial users.
- [Label Studio](#) is an excellent annotation software covering the functionality of dataset annotation in areas such as image classification, object detection, and segmentation.

In this article, we will use [cat](#) images for semi-automatic annotation.

### 4.19.1 Environment Configuration

To begin with, you need to create a virtual environment and then install PyTorch and MMCV. In this article, we will specify the versions of PyTorch and MMCV. Next, you can install MMDetection, Label-Studio, and label-studio-ml-backend using the following steps:

Create a virtual environment:

```
conda create -n rtmddet python=3.9 -y
conda activate rtmddet
```

Install PyTorch:

```
# Linux and Windows CPU only
pip install torch==1.10.1+cpu torchvision==0.11.2+cpu torchaudio==0.10.1 -f https://
↳download.pytorch.org/whl/cpu/torch_stable.html
# Linux and Windows CUDA 11.3
pip install torch==1.10.1+cu113 torchvision==0.11.2+cu113 torchaudio==0.10.1 -f https://
↳download.pytorch.org/whl/cu113/torch_stable.html
# OSX
pip install torch==1.10.1 torchvision==0.11.2 torchaudio==0.10.1
```

Install MMCV:

```
pip install -U openmim
mim install "mimcv>=2.0.0"
# Installing mimcv will automatically install mmengine
```

Install MMDetection:

```
git clone https://github.com/open-mmlab/mmdetection
cd mmdetection
pip install -v -e .
```

Install Label-Studio and label-studio-ml-backend:

```
# Installing Label-Studio may take some time, if the version is not found, please use
↳the official source
pip install label-studio==1.7.2
pip install label-studio-ml==1.0.9
```

Download the rtmddet weights:

```
cd path/to/mmdetection
mkdir work_dirs
cd work_dirs
wget https://download.openmmlab.com/mmdetection/v3.0/rtmddet/rtmddet_m_8xb32-300e_coco/
↳rtmddet_m_8xb32-300e_coco_20220719_112220-229f527c.pth
```

### 4.19.2 Start the Service

Start the RTMDet backend inference service:

```
cd path/to/mmdetection

label-studio-ml start projects/LabelStudio/backend_template --with \
config_file=configs/rtdet/rtdet_m_8xb32-300e_coco.py \
checkpoint_file=./work_dirs/rtdet_m_8xb32-300e_coco_20220719_112220-229f527c.pth \
device=cpu \
--port 8003
# Set device=cpu to use CPU inference, and replace cpu with cuda:0 to use GPU inference.
```

```
(rtdet) → mmdetection git:(label-studio) X label-studio-ml start projects/LabelStudio/backend_template --with \
config_file=configs/rtdet/rtdet_m_8xb32-300e_coco.py \
checkpoint_file=./work_dirs/rtdet_m_8xb32-300e_coco_20220719_112220-229f527c.pth \
device=cpu \
--port 8003
* Serving Flask app "label_studio_ml.api" (lazy loading)
* Environment: production
  WARNING: This is a development server. Do not use it in a production deployment.
  Use a production WSGI server instead.
* Debug mode: off
[2023-03-30 13:15:45,825] [WARNING] [werkzeug._log::225] * Running on all addresses.
  WARNING: This is a development server. Do not use it in a production deployment.
[2023-03-30 13:15:45,825] [INFO] [werkzeug._log::225] * Running on http://172.29.211.69:8003/ (Press CTRL+C to quit)
```

The RTMDet backend inference service has now been started. To configure it in the Label-Studio web system, use <http://localhost:8003> as the backend inference service.

Now, start the Label-Studio web service:

```
label-studio start
```

```
(rtdet) → mmdetection git:(label-studio) X label-studio start

=> Database and media directory: /home/vansin/.local/share/label-studio
=> Static URL is set to: /static/
=> Database and media directory: /home/vansin/.local/share/label-studio
=> Static URL is set to: /static/
Starting new HTTPS connection (1): pypi.org:443
https://pypi.org:443 "GET /pypi/label-studio/json HTTP/1.1" 200 56156
Performing system checks...

[2023-03-30 05:28:48,234] [django::register_actions_from_dir::97] [INFO] No module named 'data_manager.actions.__pycache_'
[2023-03-30 05:28:48,234] [django::register_actions_from_dir::97] [INFO] No module named 'data_manager.actions.__pycache_'
System check identified no issues (1 silenced).
March 30, 2023 - 05:28:48
Django version 3.2.16, using settings 'label_studio.core.settings.label_studio'
Starting development server at http://0.0.0.0:8080/
Quit the server with CONTROL-C.
```

Open your web browser and go to <http://localhost:8080/> to see the Label-Studio interface.

## Welcome to Label Studio Community Edition

A full-fledged open source solution for data labeling



[SIGN UP](#)

[LOG IN](#)

Star@MMDetection.com

.....

☒ Get the latest news from Heidi



CREATE ACCOUNT

Register a user and then create an RTMDet-Semiautomatic-Label project.

The screenshot shows the 'Create Project' dialog in Label Studio. It has three tabs: 'Project Name', 'Data Import', and 'Labeling Setup'. The 'Project Name' tab is active, showing a text input field with 'RTMDet-Semiautomatic-Label' and a description field with the placeholder 'Optional description of your project'. There are 'Delete' and 'Save' buttons at the top right.


Download the example cat images by running the following command and import them using the Data Import button:


```
cd path/to/mmdetection
mkdir data && cd data
```

(continues on next page)


(continued from previous page)

```
wget https://download.openmmlab.com/mmyolo/data/cat_dataset.zip && unzip cat_dataset.zip
```

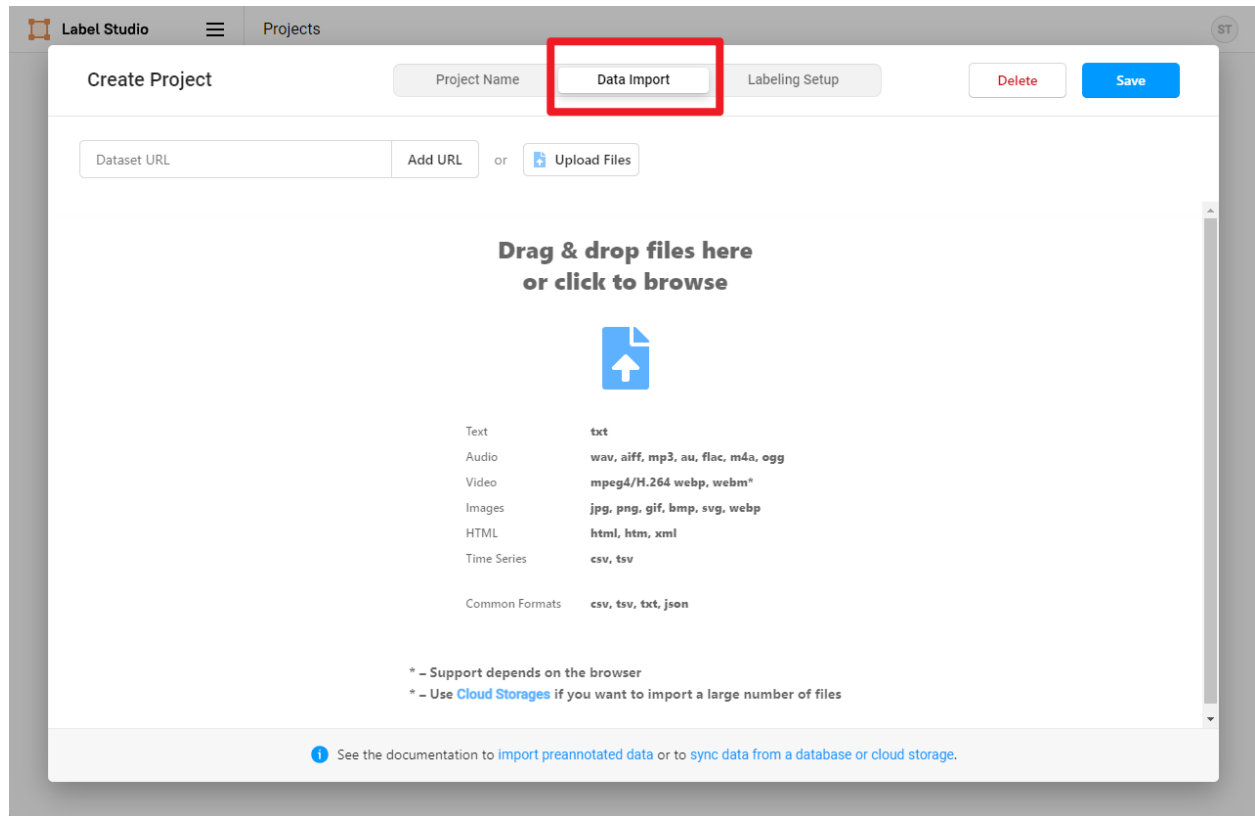

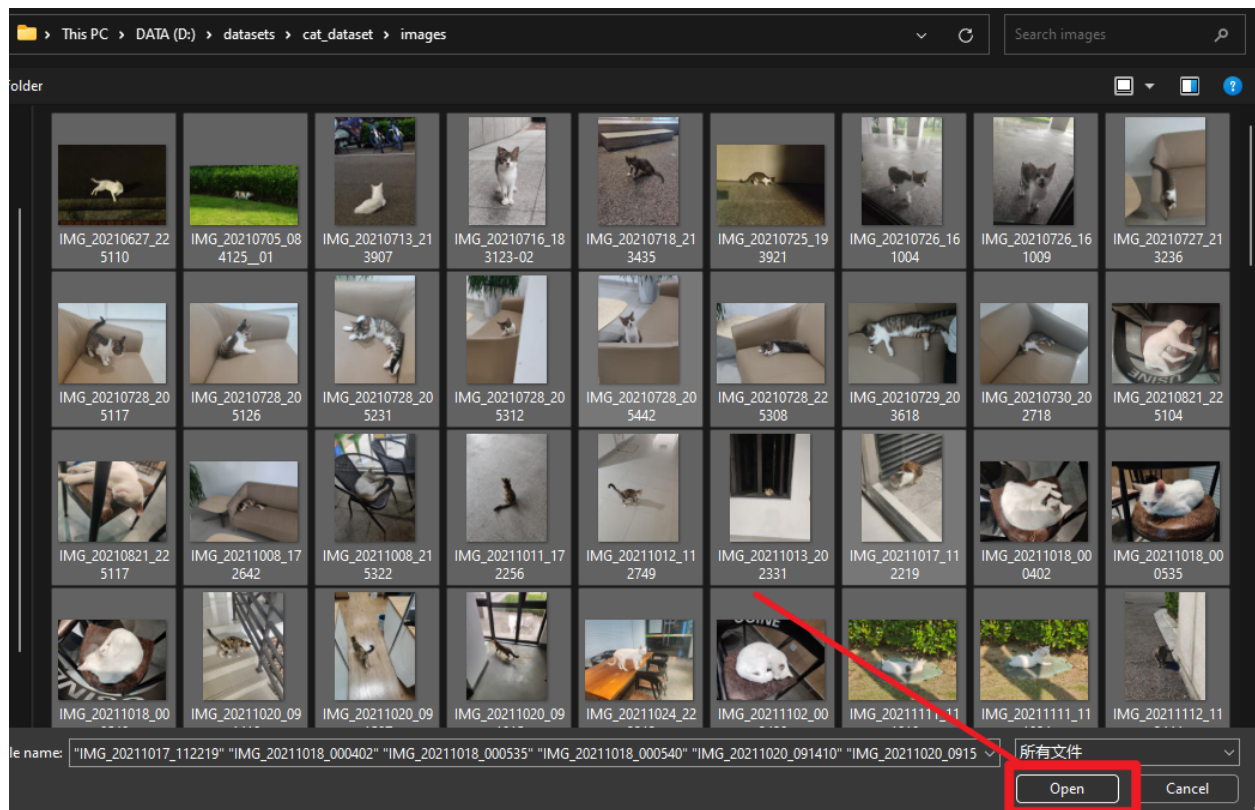

Then, select the Object Detection With Bounding Boxes template.

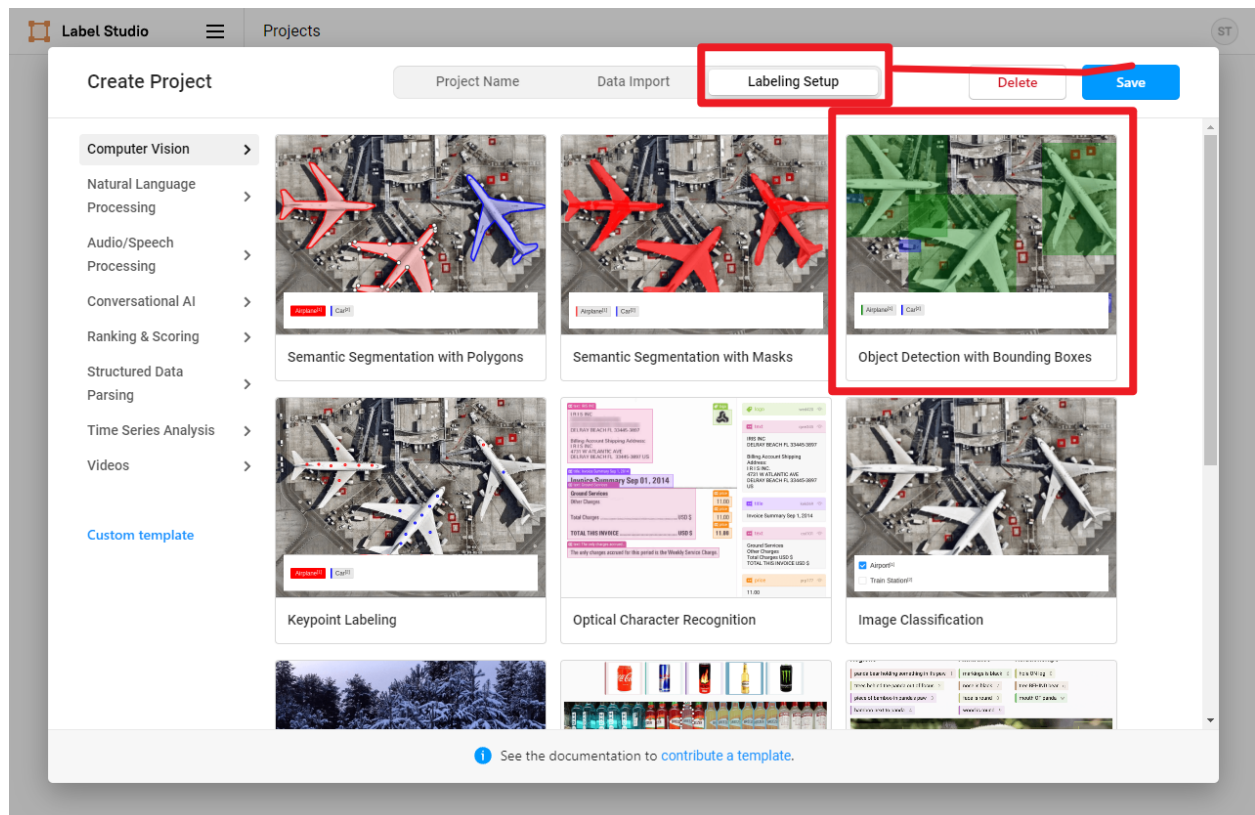


airplane  
apple  
backpack  
banana  
baseball\_bat  
baseball\_glove  
bear  
bed  
bench  
bicycle  
bird  
boat  
book  
bottle  
bowl  
broccoli  
bus  
cake  
car  
carrot  
cat  
cell\_phone  
chair  
clock  
couch  
cow  
cup  
dining\_table  
dog  
donut  
elephant  
fire\_hydrant  
fork  
frisbee  
giraffe  
hair\_drier  
handbag  
horse  
hot\_dog  
keyboard  
kite  
knife  
laptop  
microwave  
motorcycle  
mouse  
orange  
oven  
parking\_meter  
person  
pizza  
potted\_plant  
refrigerator

(continues on next page)


(continued from previous page)

```
remote
sandwich
scissors
sheep
sink
skateboard
skis
snowboard
spoon
sports_ball
stop_sign
suitcase
surfboard
teddy_bear
tennis_racket
tie
toaster
toilet
toothbrush
traffic_light
train
truck
tv
umbrella
vase
wine_glass
zebra
```


Then, copy and add the above categories to Label-Studio and click Save.

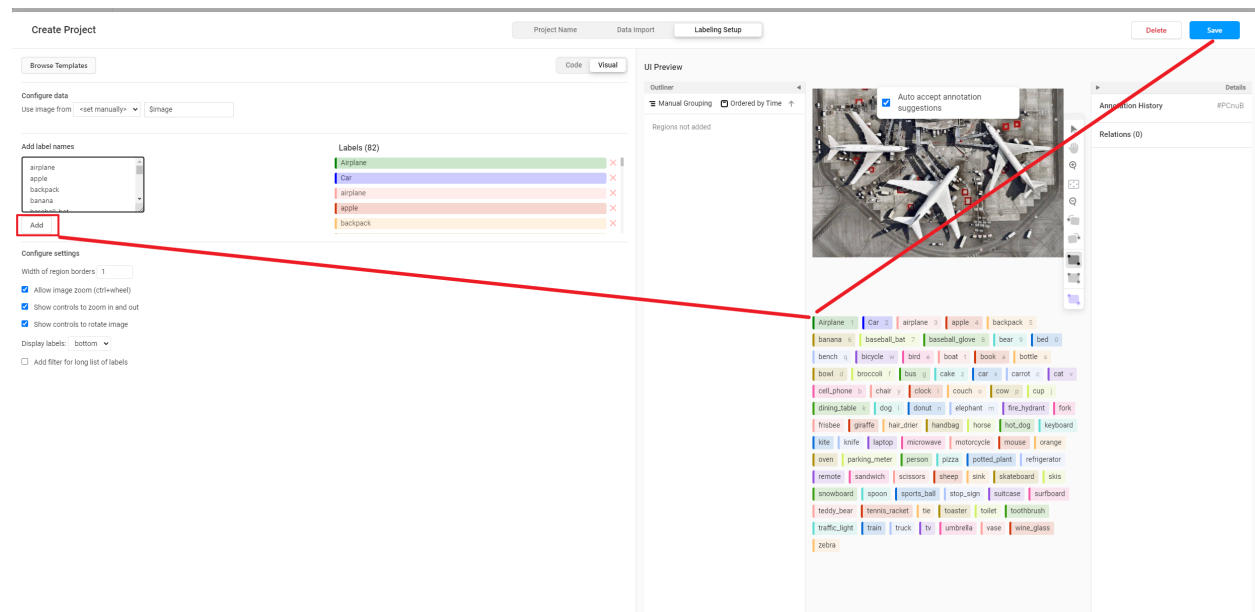


In the Settings, click Add Model to add the RTMDet backend inference service.

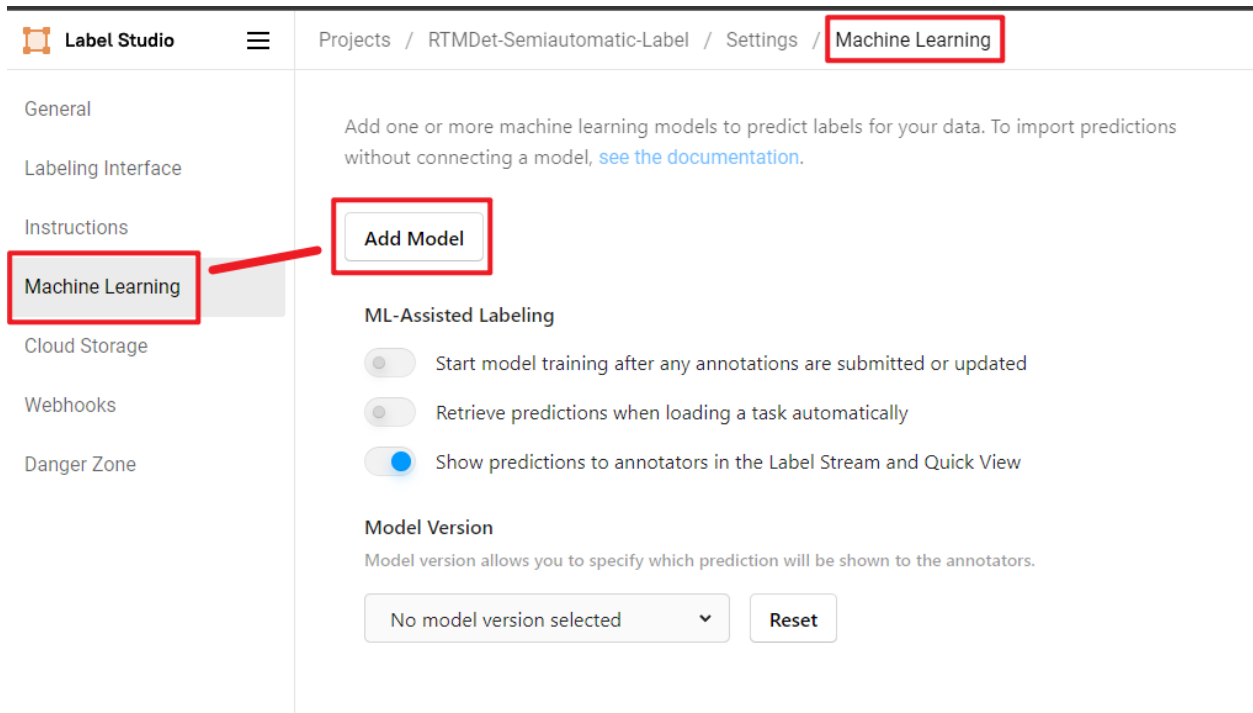

Click Validate and Save, and then click Start Labeling.

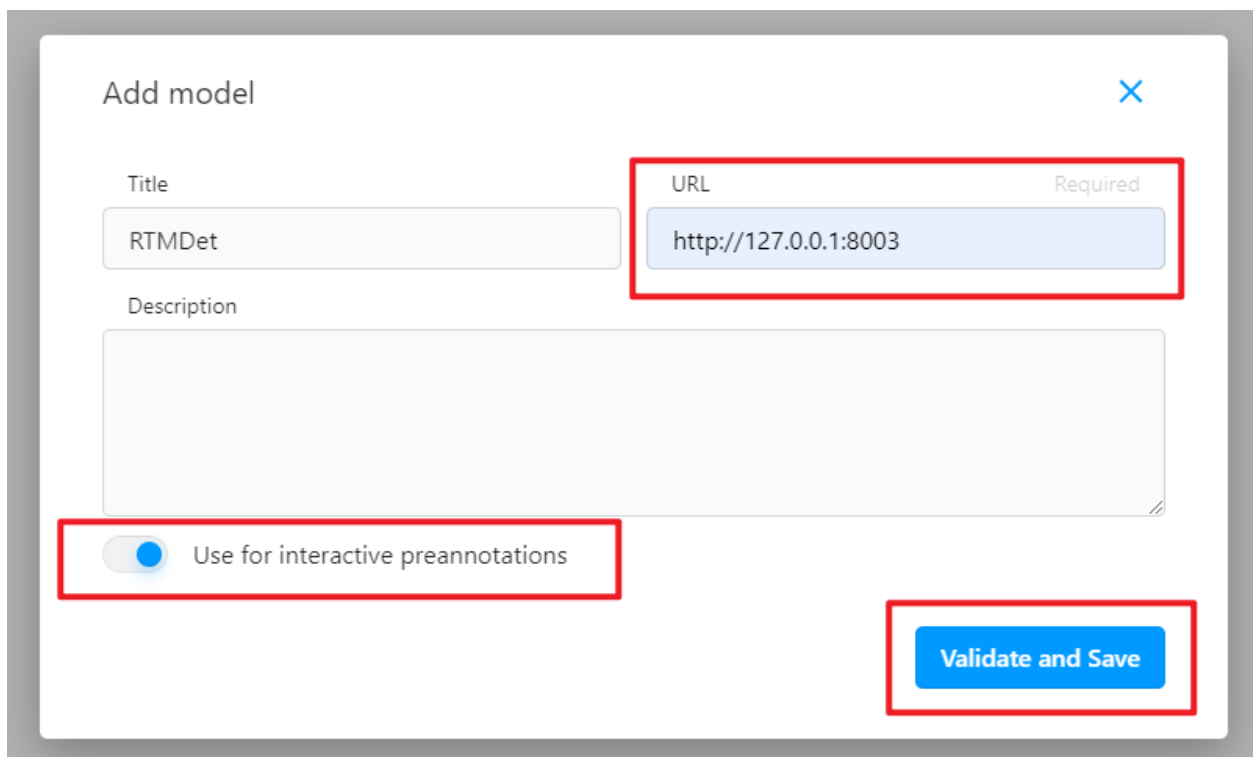

If you see Connected as shown below, the backend inference service has been successfully added.


**Label Studio**

Projects / RTMDet-Semiautomatic-Label / Settings / Machine Learning

General

Labeling Interface

Instructions

**Machine Learning**

Cloud Storage

Webhooks

Danger Zone

Add one or more machine learning models to predict labels for your data. To import predictions without connecting a model, [see the documentation](#).

Add Model

**ML-Assisted Labeling**

☐ Start model training after any annotations are submitted or updated

☐ Retrieve predictions when loading a task automatically

☒ Show predictions to annotators in the Label Stream and Quick View

**Model Version**

Model version allows you to specify which prediction will be shown to the annotators.

No model version selected

Reset

RTMDet

Connected

URL

http://127.0.0.1:8003


Version

INITIAL

Start Training

### 4.19.3 Start Semi-Automatic Labeling

Click on Label to start labeling.


**Label Studio**

Projects

RTMDet-Semiautomatic-Label

0 / 144

✓ 0

✗ 0


30 Mar '23, 13:39

...


Settings

**Label**


We can see that the RTMDet backend inference service has successfully returned the predicted results and displayed them on the image. However, we noticed that the predicted bounding boxes for the cats are a bit too large and not very accurate.

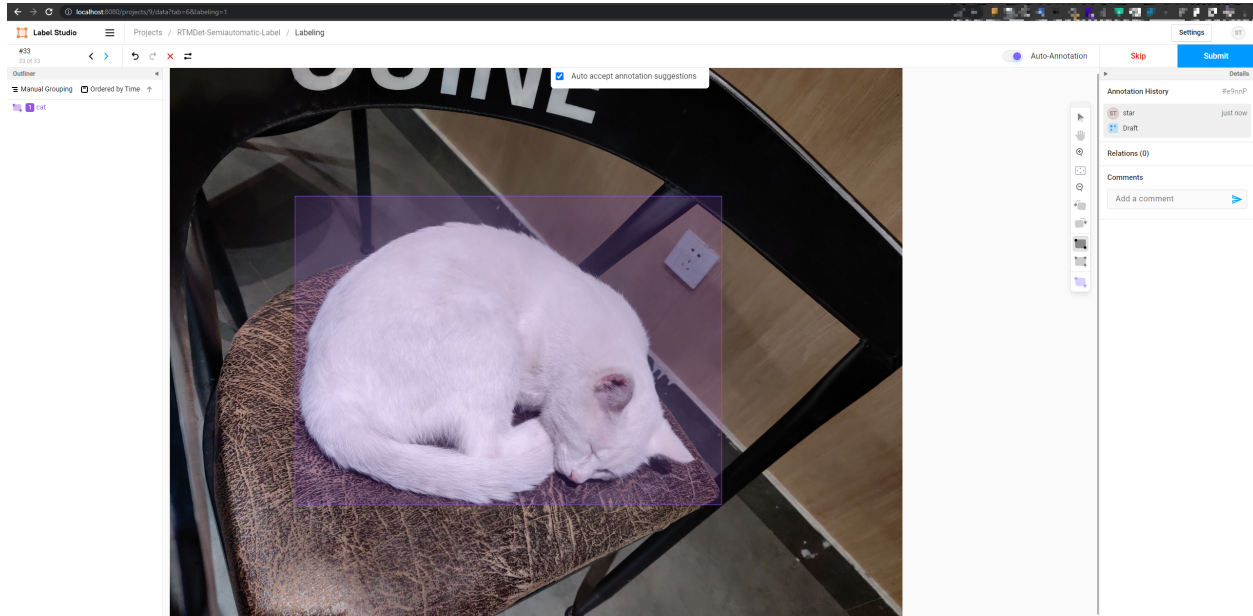


We manually adjust the position of the cat bounding box, and then click Submit to complete the annotation of this image.

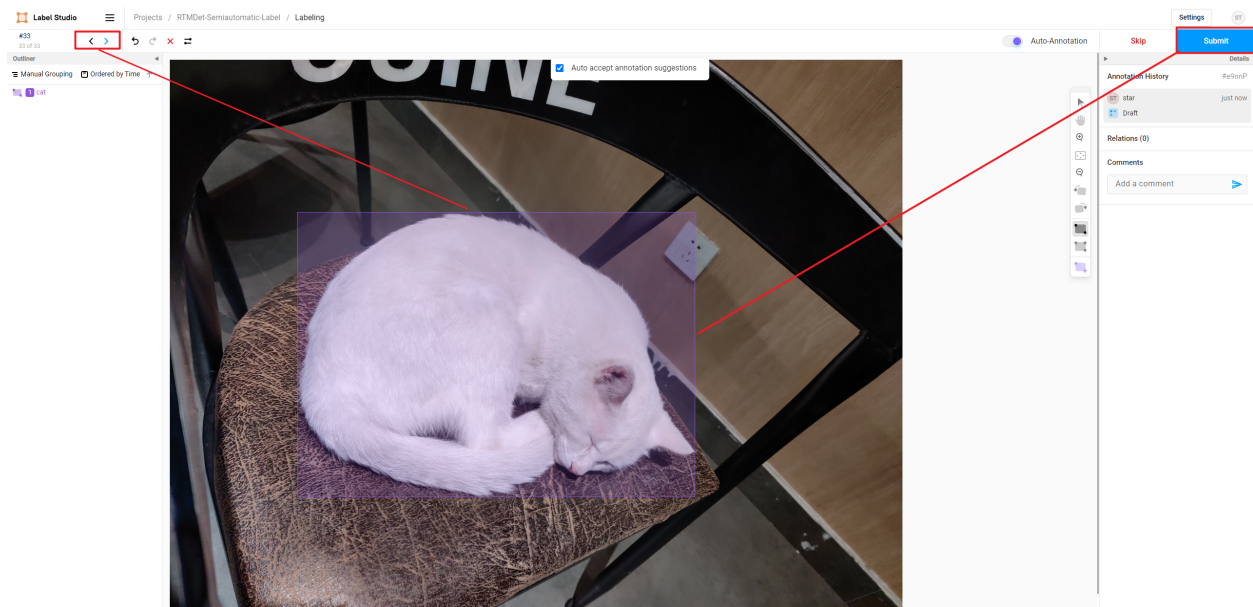

After submitting all images, click export to export the labeled dataset in COCO format.

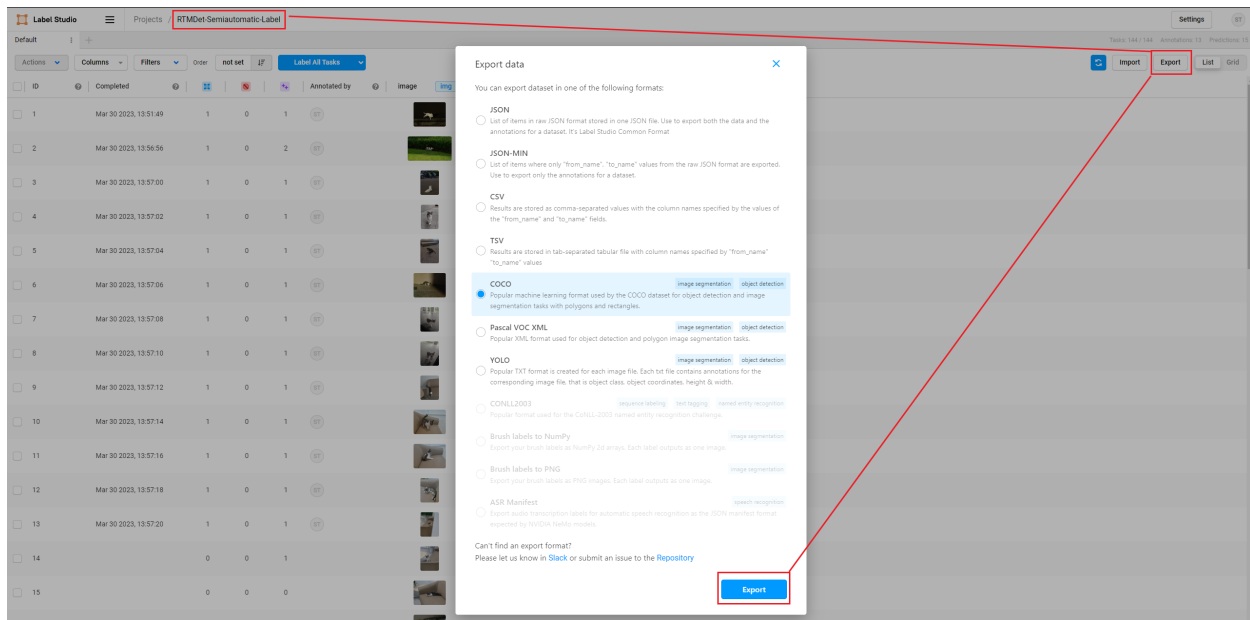

Use VS Code to open the unzipped folder to see the labeled dataset, which includes the images and the annotation files in JSON format.

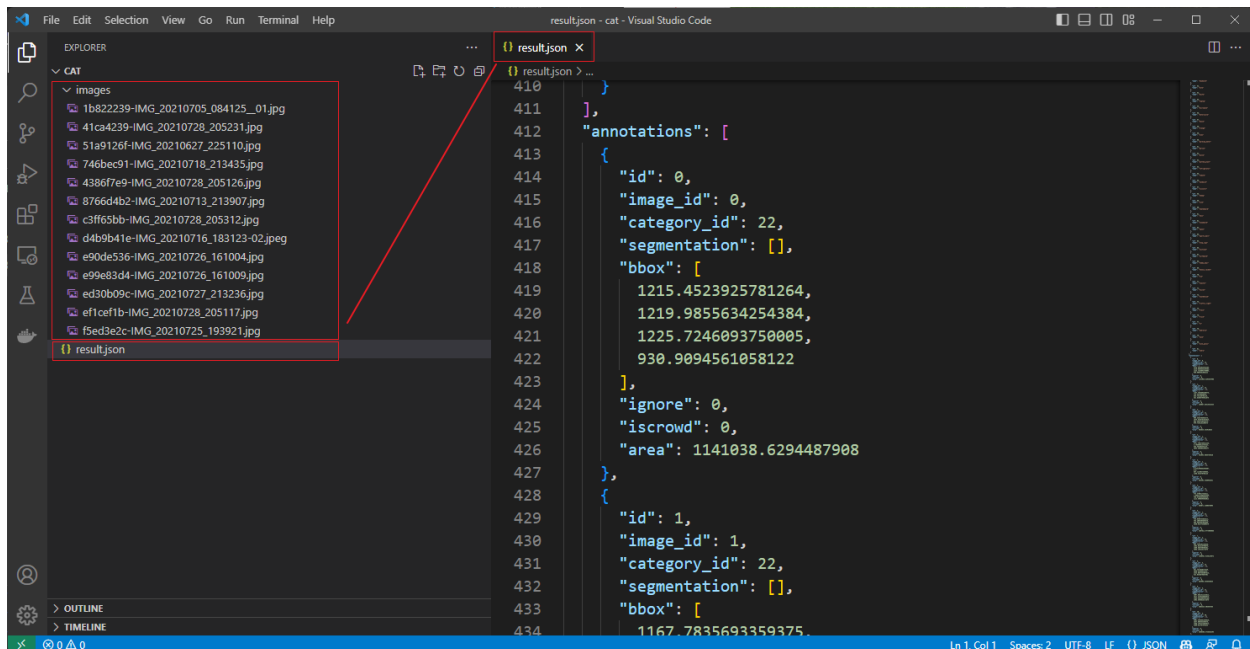

At this point, the semi-automatic labeling is complete. We can use this dataset to train a more accurate model in MMDetection and then continue semi-automatic labeling on newly collected images with this model. This way, we can iteratively expand the high-quality dataset and improve the accuracy of the model.

#### 4.19.4 Use MMYOLO as the Backend Inference Service

If you want to use Label-Studio in MMYOLO, you can refer to replacing the `config_file` and `checkpoint_file` with the configuration file and weight file of MMYOLO when starting the backend inference service.

```
cd path/to/mmdetection

label-studio-ml start projects/LabelStudio/backend_template --with \
config_file= path/to/mmyolo_config.py \
checkpoint_file= path/to/mmyolo_weights.pth \
device=cpu \
--port 8003
# device=cpu is for using CPU inference. If using GPU inference, replace cpu with cuda:0.
```

Rotation object detection and instance segmentation are still under development, please stay tuned.



## BASIC CONCEPTS

### 5.1 Data Flow

### 5.2 Structures

### 5.3 Models

### 5.4 Datasets


### 5.5 Data Transforms (Need to update)

#### 5.5.1 Design of Data transforms pipeline

Following typical conventions, we use `Dataset` and `DataLoader` for data loading with multiple workers. `Dataset` returns a dict of data items corresponding the arguments of models' forward method.

The data transforms pipeline and the dataset is decomposed. Usually a dataset defines how to process the annotations and a data transforms pipeline defines all the steps to prepare a data dict. A pipeline consists of a sequence of data transforms. Each operation takes a dict as input and also output a dict for the next transform.

We present a classical pipeline in the following figure. The blue blocks are pipeline operations. With the pipeline going on, each operator can add new keys (marked as green) to the result dict or update the existing keys (marked as orange).

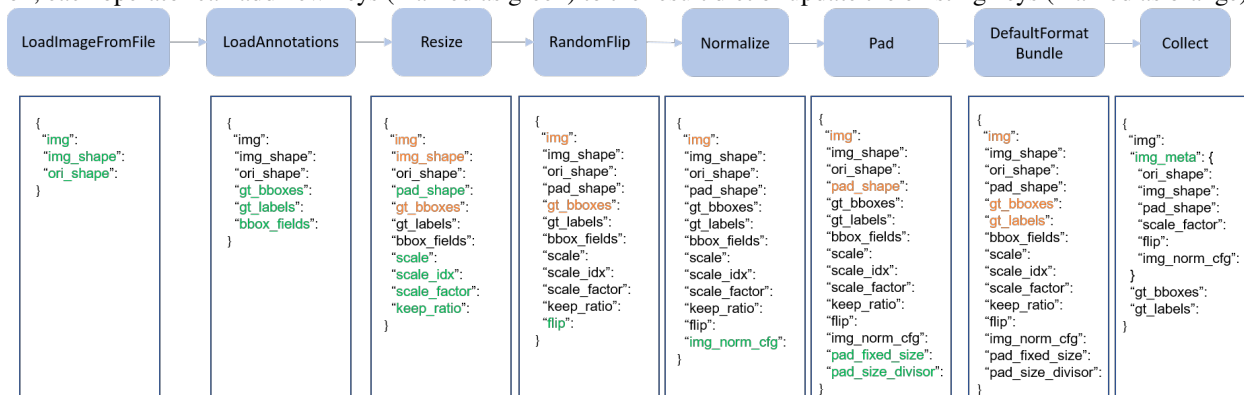

Here is a pipeline example for Faster R-CNN.

```
train_pipeline = [ # Training data processing pipeline
    dict(type='LoadImageFromFile', backend_args=backend_args), # First pipeline to load
    ↪ images from file path
    dict(
        type='LoadAnnotations', # Second pipeline to load annotations for current image
        with_bbox=True, # Whether to use bounding box, True for detection
    dict(
        type='Resize', # Pipeline that resize the images and their annotations
        scale=(1333, 800), # The largest scale of image
        keep_ratio=True # Whether to keep the ratio between height and width
    ),
    dict(
        type='RandomFlip', # Augmentation pipeline that flip the images and their
    ↪ annotations
        prob=0.5, # The probability to flip
    dict(type='PackDetInputs') # Pipeline that formats the annotation data and decides
    ↪ which keys in the data should be packed into data_samples
    ]
test_pipeline = [ # Testing data processing pipeline
    dict(type='LoadImageFromFile', backend_args=backend_args), # First pipeline to load
    ↪ images from file path
    dict(type='Resize', scale=(1333, 800), keep_ratio=True), # Pipeline that resize the
    ↪ images
    dict(
        type='PackDetInputs', # Pipeline that formats the annotation data and decides
    ↪ which keys in the data should be packed into data_samples
        meta_keys=('img_id', 'img_path', 'ori_shape', 'img_shape',
                    'scale_factor'))
    ]
```

## 5.6 Evaluation

## 5.7 Engine

## 5.8 Conventions

Please check the following conventions if you would like to modify MMDetection as your own project.

### 5.8.1 About the order of image shape

In OpenMMLab 2.0, to be consistent with the input argument of OpenCV, the argument about image shape in the data transformation pipeline is always in the (width, height) order. On the contrary, for computation convenience, the order of the field going through the data pipeline and the model is (height, width). Specifically, in the results processed by each data transform pipeline, the fields and their value meaning is as below:

- img\_shape: (height, width)
- ori\_shape: (height, width)
- pad\_shape: (height, width)

- batch\_input\_shape: (height, width)

As an example, the initialization arguments of Mosaic are as below:

```
@TRANSFORMS.register_module()
class Mosaic(BaseTransform):
    def __init__(self,
                  img_scale: Tuple[int, int] = (640, 640),
                  center_ratio_range: Tuple[float, float] = (0.5, 1.5),
                  bbox_clip_border: bool = True,
                  pad_val: float = 114.0,
                  prob: float = 1.0) -> None:
        ...

        # img_scale order should be (width, height)
        self.img_scale = img_scale

    def transform(self, results: dict) -> dict:
        ...

        results['img'] = mosaic_img
        # (height, width)
        results['img_shape'] = mosaic_img.shape[:2]
```

## 5.8.2 Loss

In MMDetection, a dict containing losses and metrics will be returned by `model(**data)`.

For example, in bbox head,

```
class BBoxHead(nn.Module):
    ...
    def loss(self, ...):
        losses = dict()
        # classification loss
        losses['loss_cls'] = self.loss_cls(...)
        # classification accuracy
        losses['acc'] = accuracy(...)
        # bbox regression loss
        losses['loss_bbox'] = self.loss_bbox(...)
        return losses
```

`bbox_head.loss()` will be called during model forward. The returned dict contains 'loss\_bbox', 'loss\_cls', 'acc'. Only 'loss\_bbox', 'loss\_cls' will be used during back propagation, 'acc' will only be used as a metric to monitor training process.

By default, only values whose keys contain 'loss' will be back propagated. This behavior could be changed by modifying `BaseDetector.train_step()`.

### 5.8.3 Empty Proposals

In MMDetection, We have added special handling and unit test for empty proposals of two-stage. We need to deal with the empty proposals of the entire batch and single image at the same time. For example, in CascadeRoIHead,

```
# simple_test method
...
# There is no proposal in the whole batch
if rois.shape[0] == 0:
    bbox_results = [[
        np.zeros((0, 5), dtype=np.float32)
        for _ in range(self.bbox_head[-1].num_classes)
    ]] * num_imgs
    if self.with_mask:
        mask_classes = self.mask_head[-1].num_classes
        segm_results = [[[] for _ in range(mask_classes)]
                        for _ in range(num_imgs)]
        results = list(zip(bbox_results, segm_results))
    else:
        results = bbox_results
    return results
...

# There is no proposal in the single image
for i in range(self.num_stages):
    ...
    if i < self.num_stages - 1:
        for j in range(num_imgs):
            # Handle empty proposal
            if rois[j].shape[0] > 0:
                bbox_label = cls_score[j][:, :-1].argmax(dim=1)
                refine_roi = self.bbox_head[i].regress_by_class(
                    rois[j], bbox_label, bbox_pred[j], img metas[j])
                refine_roi_list.append(refine_roi)
```

If you have customized RoIHead, you can refer to the above method to deal with empty proposals.

### 5.8.4 Coco Panoptic Dataset

In MMDetection, we have supported COCO Panoptic dataset. We clarify a few conventions about the implementation of CocoPanopticDataset here.

1. For mmdet<=2.16.0, the range of foreground and background labels in semantic segmentation are different from the default setting of MMDetection. The label 0 stands for VOID label and the category labels start from 1. Since mmdet=2.17.0, the category labels of semantic segmentation start from 0 and label 255 stands for VOID for consistency with labels of bounding boxes. To achieve that, the Pad pipeline supports setting the padding value for seg.
2. In the evaluation, the panoptic result is a map with the same shape as the original image. Each value in the result map has the format of instance\_id \* INSTANCE\_OFFSET + category\_id.

## COMPONENT CUSTOMIZATION

### 6.1 Customize Models

We basically categorize model components into 5 types.

- backbone: usually an FCN network to extract feature maps, e.g., ResNet, MobileNet.
- neck: the component between backbones and heads, e.g., FPN, PAFPN.
- head: the component for specific tasks, e.g., bbox prediction and mask prediction.
- roi extractor: the part for extracting RoI features from feature maps, e.g., RoI Align.
- loss: the component in head for calculating losses, e.g., FocalLoss, L1Loss, and GHMLoss.

#### 6.1.1 Develop new components

##### Add a new backbone

Here we show how to develop new components with an example of MobileNet.

##### 1. Define a new backbone (e.g. MobileNet)

Create a new file `mmdet/models/backbones/mobilenet.py`.

```
import torch.nn as nn

from mmdet.registry import MODELS

@MODELS.register_module()
class MobileNet(nn.Module):

    def __init__(self, arg1, arg2):
        pass

    def forward(self, x): # should return a tuple
        pass
```

## 2. Import the module

You can either add the following line to `mmdet/models/backbones/__init__.py`

```
from .mobilenet import MobileNet
```

or alternatively add

```
custom_imports = dict(
    imports=['mmdet.models.backbones.mobilenet'],
    allow_failed_imports=False)
```

to the config file to avoid modifying the original code.

## 3. Use the backbone in your config file

```
model = dict(
    ...
    backbone=dict(
        type='MobileNet',
        arg1=xxx,
        arg2=xxx),
    ...)
```

## Add new necks

### 1. Define a neck (e.g. PAFPN)

Create a new file `mmdet/models/necks/pafpn.py`.

```
import torch.nn as nn

from mmdet.registry import MODELS

@MODELS.register_module()
class PAFPN(nn.Module):

    def __init__(self,
                 in_channels,
                 out_channels,
                 num_outs,
                 start_level=0,
                 end_level=-1,
                 add_extra_convs=False):
        pass

    def forward(self, inputs):
        # implementation is ignored
        pass
```



(continued from previous page)

```

    roi features
                                /-> cls
                                \-> shared fc  ->
                                \-> reg

    """ # noqa: W605

    def __init__(self,
                  num_convs: int = 0,
                  num_fcs: int = 0,
                  conv_out_channels: int = 1024,
                  fc_out_channels: int = 1024,
                  conv_cfg: OptConfigType = None,
                  norm_cfg: ConfigType = dict(type='BN'),
                  init_cfg: MultiConfig = dict(
                      type='Normal',
                      override=[
                          dict(type='Normal', name='fc_cls', std=0.01),
                          dict(type='Normal', name='fc_reg', std=0.001),
                          dict(
                              type='Xavier',
                              name='fc_branch',
                              distribution='uniform')
                      ]),
                  **kwargs) -> None:
        kwargs.setdefault('with_avg_pool', True)
        super().__init__(init_cfg=init_cfg, **kwargs)

    def forward(self, x_cls: Tensor, x_reg: Tensor) -> Tuple[Tensor]:

```

Second, implement a new RoI Head if it is necessary. We plan to inherit the new DoubleHeadRoIHead from StandardRoIHead. We can find that a StandardRoIHead already implements the following functions.

```

from typing import List, Optional, Tuple

import torch
from torch import Tensor

from mmdet.registry import MODELS, TASK_UTILS
from mmdet.structures import DetDataSample
from mmdet.structures.bbox import bbox2roi
from mmdet.utils import ConfigType, InstanceList
from ..task_modules.samplers import SamplingResult
from ..utils import empty_instances, unpack_gt_instances
from .base_roi_head import BaseRoIHead

@MODELS.register_module()
class StandardRoIHead(BaseRoIHead):
    """Simplest base roi head including one bbox head and one mask head."""

    def init_assigner_sampler(self) -> None:

```

(continues on next page)

(continued from previous page)

```

def init_bbox_head(self, bbox_roi_extractor: ConfigType,
                  bbox_head: ConfigType) -> None:

def init_mask_head(self, mask_roi_extractor: ConfigType,
                  mask_head: ConfigType) -> None:

def forward(self, x: Tuple[Tensor],
            rpn_results_list: InstanceList) -> tuple:

def loss(self, x: Tuple[Tensor], rpn_results_list: InstanceList,
         batch_data_samples: List[DetDataSample]) -> dict:

def _bbox_forward(self, x: Tuple[Tensor], rois: Tensor) -> dict:

def bbox_loss(self, x: Tuple[Tensor],
              sampling_results: List[SamplingResult]) -> dict:

def mask_loss(self, x: Tuple[Tensor],
              sampling_results: List[SamplingResult], bbox_feats: Tensor,
              batch_gt_instances: InstanceList) -> dict:

def _mask_forward(self,
                  x: Tuple[Tensor],
                  rois: Tensor = None,
                  pos_inds: Optional[Tensor] = None,
                  bbox_feats: Optional[Tensor] = None) -> dict:

def predict_bbox(self,
                 x: Tuple[Tensor],
                 batch_img metas: List[dict],
                 rpn_results_list: InstanceList,
                 rcnn_test_cfg: ConfigType,
                 rescale: bool = False) -> InstanceList:

def predict_mask(self,
                 x: Tuple[Tensor],
                 batch_img metas: List[dict],
                 results_list: InstanceList,
                 rescale: bool = False) -> InstanceList:

```

Double Head's modification is mainly in the `bbox_forward` logic, and it inherits other logics from the `StandardRoIHead`. In the `mmdet/models/roi_heads/double_roi_head.py`, we implement the new RoI Head as the following:

```

from typing import Tuple

from torch import Tensor

from mmdet.registry import MODELS
from .standard_roi_head import StandardRoIHead

```

(continues on next page)

(continued from previous page)

```

@MODELS.register_module()
class DoubleHeadRoIHead(StandardRoIHead):
    """RoI head for `Double Head RCNN <https://arxiv.org/abs/1904.06493>`_.

    Args:
        reg_roi_scale_factor (float): The scale factor to extend the rois
            used to extract the regression features.

    """

    def __init__(self, reg_roi_scale_factor: float, **kwargs):
        super().__init__(**kwargs)
        self.reg_roi_scale_factor = reg_roi_scale_factor

    def _bbox_forward(self, x: Tuple[Tensor], rois: Tensor) -> dict:
        """Box head forward function used in both training and testing.

        Args:
            x (tuple[Tensor]): List of multi-level img features.
            rois (Tensor): RoIs with the shape (n, 5) where the first
                column indicates batch id of each RoI.

        Returns:
            dict[str, Tensor]: Usually returns a dictionary with keys:

            - `cls_score` (Tensor): Classification scores.
            - `bbox_pred` (Tensor): Box energies / deltas.
            - `bbox_feats` (Tensor): Extract bbox RoI features.

        """
        bbox_cls_feats = self.bbox_roi_extractor(
            x[:self.bbox_roi_extractor.num_inputs], rois)
        bbox_reg_feats = self.bbox_roi_extractor(
            x[:self.bbox_roi_extractor.num_inputs],
            rois,
            roi_scale_factor=self.reg_roi_scale_factor)
        if self.with_shared_head:
            bbox_cls_feats = self.shared_head(bbox_cls_feats)
            bbox_reg_feats = self.shared_head(bbox_reg_feats)
        cls_score, bbox_pred = self.bbox_head(bbox_cls_feats, bbox_reg_feats)

        bbox_results = dict(
            cls_score=cls_score,
            bbox_pred=bbox_pred,
            bbox_feats=bbox_cls_feats)
        return bbox_results

```

Last, the users need to add the module in `mmdet/models/bbox_heads/__init__.py` and `mmdet/models/roi_heads/__init__.py` thus the corresponding registry could find and load them.

Alternatively, the users can add

```
custom_imports=dict(
    imports=['mmdet.models.roi_heads.double_roi_head', 'mmdet.models.roi_heads.bbox_
↳ heads.double_bbox_head'])
```

to the config file and achieve the same goal.

The config file of Double Head R-CNN is as the following

```
_base_ = '../faster_rcnn/faster-rcnn_r50_fpn_1x_coco.py'
model = dict(
    roi_head=dict(
        type='DoubleHeadRoIHead',
        reg_roi_scale_factor=1.3,
        bbox_head=dict(
            _delete_=True,
            type='DoubleConvFCBBoxHead',
            num_convs=4,
            num_fcs=2,
            in_channels=256,
            conv_out_channels=1024,
            fc_out_channels=1024,
            roi_feat_size=7,
            num_classes=80,
            bbox_coder=dict(
                type='DeltaXYWHBBoxCoder',
                target_means=[0., 0., 0., 0.],
                target_std=[0.1, 0.1, 0.2, 0.2]),
            reg_class_agnostic=False,
            loss_cls=dict(
                type='CrossEntropyLoss', use_sigmoid=False, loss_weight=2.0),
            loss_bbox=dict(type='SmoothL1Loss', beta=1.0, loss_weight=2.0))))
```

Since MMDetection 2.0, the config system supports to inherit configs such that the users can focus on the modification. The Double Head R-CNN mainly uses a new `DoubleHeadRoIHead` and a new `DoubleConvFCBBoxHead`, the arguments are set according to the `__init__` function of each module.

## Add new loss

Assume you want to add a new loss as `MyLoss`, for bounding box regression. To add a new loss function, the users need implement it in `mmdet/models/losses/my_loss.py`. The decorator `weighted_loss` enable the loss to be weighted for each element.

```
import torch
import torch.nn as nn

from mmdet.registry import MODELS
from .utils import weighted_loss

@weighted_loss
def my_loss(pred, target):
    assert pred.size() == target.size() and target.numel() > 0
    loss = torch.abs(pred - target)
```

(continues on next page)

(continued from previous page)

```

    return loss

@MODELS.register_module()
class MyLoss(nn.Module):

    def __init__(self, reduction='mean', loss_weight=1.0):
        super(MyLoss, self).__init__()
        self.reduction = reduction
        self.loss_weight = loss_weight

    def forward(self,
                pred,
                target,
                weight=None,
                avg_factor=None,
                reduction_override=None):
        assert reduction_override in (None, 'none', 'mean', 'sum')
        reduction = (
            reduction_override if reduction_override else self.reduction)
        loss_bbox = self.loss_weight * my_loss(
            pred, target, weight, reduction=reduction, avg_factor=avg_factor)
        return loss_bbox

```

Then the users need to add it in the `mmdet/models/losses/__init__.py`.

```

from .my_loss import MyLoss, my_loss

```

Alternatively, you can add

```

custom_imports=dict(
    imports=['mmdet.models.losses.my_loss'])

```

to the config file and achieve the same goal.

To use it, modify the `loss_xxx` field. Since `MyLoss` is for regression, you need to modify the `loss_bbox` field in the head.

```

loss_bbox=dict(type='MyLoss', loss_weight=1.0))

```

## 6.2 Customize Losses

MMDetection provides users with different loss functions. But the default configuration may be not applicable for different datasets or models, so users may want to modify a specific loss to adapt the new situation.

This tutorial first elaborate the computation pipeline of losses, then give some instructions about how to modify each step. The modification can be categorized as tweaking and weighting.

### 6.2.1 Computation pipeline of a loss

Given the input prediction and target, as well as the weights, a loss function maps the input tensor to the final loss scalar. The mapping can be divided into five steps:

1. Set the sampling method to sample positive and negative samples.
2. Get **element-wise** or **sample-wise** loss by the loss kernel function.
3. Weighting the loss with a weight tensor **element-wisely**.
4. Reduce the loss tensor to a **scalar**.
5. Weighting the loss with a **scalar**.

### 6.2.2 Set sampling method (step 1)

For some loss functions, sampling strategies are needed to avoid imbalance between positive and negative samples.

For example, when using CrossEntropyLoss in RPN head, we need to set RandomSampler in train\_cfg

```
train_cfg=dict(
    rpn=dict(
        sampler=dict(
            type='RandomSampler',
            num=256,
            pos_fraction=0.5,
            neg_pos_ub=-1,
            add_gt_as_proposals=False))
```

For some other losses which have positive and negative sample balance mechanism such as Focal Loss, GHMC, and QualityFocalLoss, the sampler is no more necessary.

### 6.2.3 Tweaking loss

Tweaking a loss is more related with step 2, 4, 5, and most modifications can be specified in the config. Here we take Focal Loss (FL) as an example. The following code sniper are the construction method and config of FL respectively, they are actually one to one correspondence.

```
@LOSSES.register_module()
class FocalLoss(nn.Module):

    def __init__(self,
                  use_sigmoid=True,
                  gamma=2.0,
                  alpha=0.25,
                  reduction='mean',
                  loss_weight=1.0):
```

```
loss_cls=dict(
    type='FocalLoss',
    use_sigmoid=True,
    gamma=2.0,
    alpha=0.25,
    loss_weight=1.0)
```

### Tweaking hyper-parameters (step 2)

`gamma` and `beta` are two hyper-parameters in the Focal Loss. Say if we want to change the value of `gamma` to be 1.5 and `alpha` to be 0.5, then we can specify them in the config as follows:

```
loss_cls=dict(  
    type='FocalLoss',  
    use_sigmoid=True,  
    gamma=1.5,  
    alpha=0.5,  
    loss_weight=1.0)
```

### Tweaking the way of reduction (step 3)

The default way of reduction is mean for FL. Say if we want to change the reduction from mean to sum, we can specify it in the config as follows:

```
loss_cls=dict(  
    type='FocalLoss',  
    use_sigmoid=True,  
    gamma=2.0,  
    alpha=0.25,  
    loss_weight=1.0,  
    reduction='sum')
```

### Tweaking loss weight (step 5)

The loss weight here is a scalar which controls the weight of different losses in multi-task learning, e.g. classification loss and regression loss. Say if we want to change to loss weight of classification loss to be 0.5, we can specify it in the config as follows:

```
loss_cls=dict(  
    type='FocalLoss',  
    use_sigmoid=True,  
    gamma=2.0,  
    alpha=0.25,  
    loss_weight=0.5)
```

## 6.2.4 Weighting loss (step 3)

Weighting loss means we re-weight the loss element-wisely. To be more specific, we multiply the loss tensor with a weight tensor which has the same shape. As a result, different entries of the loss can be scaled differently, and so called element-wisely. The loss weight varies across different models and highly context related, but overall there are two kinds of loss weights, `label_weights` for classification loss and `bbox_weights` for bbox regression loss. You can find them in the `get_target` method of the corresponding head. Here we take `ATSSHead` as an example, which inherit `AnchorHead` but overwrite its `get_targets` method which yields different `label_weights` and `bbox_weights`.

```
class ATSSHead(AnchorHead):
```

```
    ...
```

(continues on next page)

(continued from previous page)

```
def get_targets(self,
                anchor_list,
                valid_flag_list,
                gt_bboxes_list,
                img_metas,
                gt_bboxes_ignore_list=None,
                gt_labels_list=None,
                label_channels=1,
                unmap_outputs=True):
```

## 6.3 Customize Datasets

### 6.3.1 Support new data format

To support a new data format, you can either convert them to existing formats (COCO format or PASCAL format) or directly convert them to the middle format. You could also choose to convert them offline (before training by a script) or online (implement a new dataset and do the conversion at training). In MMDetection, we recommend to convert the data into COCO formats and do the conversion offline, thus you only need to modify the config's data annotation paths and classes after the conversion of your data.

#### Reorganize new data formats to existing format

The simplest way is to convert your dataset to existing dataset formats (COCO or PASCAL VOC).

The annotation JSON files in COCO format has the following necessary keys:

```
'images': [
    {
        'file_name': 'COCO_val2014_0000000001268.jpg',
        'height': 427,
        'width': 640,
        'id': 1268
    },
    ...
],

'annotations': [
    {
        'segmentation': [[192.81,
                          247.09,
                          ...
                          219.03,
                          249.06]], # If you have mask labels, and it is in polygon XY point
        ↪ coordinate format, you need to ensure that at least 3 point coordinates are included.
        ↪ Otherwise, it is an invalid polygon.
        'area': 1035.749,
        'iscrowd': 0,
        'image_id': 1268,
```

(continues on next page)

(continued from previous page)

```

        'bbox': [192.81, 224.8, 74.73, 33.43],
        'category_id': 16,
        'id': 42986
    },
    ...
],

'categories': [
    {'id': 0, 'name': 'car'},
]

```

There are three necessary keys in the JSON file:

- **images**: contains a list of images with their information like `file_name`, `height`, `width`, and `id`.
- **annotations**: contains the list of instance annotations.
- **categories**: contains the list of categories names and their ID.

After the data pre-processing, there are two steps for users to train the customized new dataset with existing format (e.g. COCO format):

1. Modify the config file for using the customized dataset.
2. Check the annotations of the customized dataset.

Here we give an example to show the above two steps, which uses a customized dataset of 5 classes with COCO format to train an existing Cascade Mask R-CNN R50-FPN detector.

## 1. Modify the config file for using the customized dataset

There are two aspects involved in the modification of config file:

1. The data field. Specifically, you need to explicitly add the `metainfo=dict(classes=classes)` fields in `train_dataloader.dataset`, `val_dataloader.dataset` and `test_dataloader.dataset` and `classes` must be a tuple type.
2. The `num_classes` field in the `model` part. Explicitly over-write all the `num_classes` from default value (e.g. 80 in COCO) to your classes number.

In `configs/my_custom_config.py`:

```

# the new config inherits the base configs to highlight the necessary modification
_base_ = './cascade_mask_rcnn_r50_fpn_1x_coco.py'

# 1. dataset settings
dataset_type = 'CocoDataset'
classes = ('a', 'b', 'c', 'd', 'e')
data_root = 'path/to/your/'

train_dataloader = dict(
    batch_size=2,
    num_workers=2,
    dataset=dict(
        type=dataset_type,

```

(continues on next page)

(continued from previous page)

```

        # explicitly add your class names to the field `metainfo`
        metainfo=dict(classes=classes),
        data_root=data_root,
        ann_file='train/annotation_data',
        data_prefix=dict(img='train/image_data')
    )
)

val_dataloader = dict(
    batch_size=1,
    num_workers=2,
    dataset=dict(
        type=dataset_type,
        test_mode=True,
        # explicitly add your class names to the field `metainfo`
        metainfo=dict(classes=classes),
        data_root=data_root,
        ann_file='val/annotation_data',
        data_prefix=dict(img='val/image_data')
    )
)

test_dataloader = dict(
    batch_size=1,
    num_workers=2,
    dataset=dict(
        type=dataset_type,
        test_mode=True,
        # explicitly add your class names to the field `metainfo`
        metainfo=dict(classes=classes),
        data_root=data_root,
        ann_file='test/annotation_data',
        data_prefix=dict(img='test/image_data')
    )
)

# 2. model settings

# explicitly over-write all the `num_classes` field from default 80 to 5.
model = dict(
    roi_head=dict(
        bbox_head=[
            dict(
                type='Shared2FCBBoxHead',
                # explicitly over-write all the `num_classes` field from default 80 to 5.
                num_classes=5),
            dict(
                type='Shared2FCBBoxHead',
                # explicitly over-write all the `num_classes` field from default 80 to 5.
                num_classes=5),
            dict(
                type='Shared2FCBBoxHead',

```

(continues on next page)

(continued from previous page)

```

        # explicitly over-write all the `num_classes` field from default 80 to 5.
        num_classes=5]],
    # explicitly over-write all the `num_classes` field from default 80 to 5.
    mask_head=dict(num_classes=5)))

```

## 2. Check the annotations of the customized dataset

Assuming your customized dataset is COCO format, make sure you have the correct annotations in the customized dataset:

1. The length for `categories` field in annotations should exactly equal the tuple length of `classes` fields in your config, meaning the number of classes (e.g. 5 in this example).
2. The `classes` fields in your config file should have exactly the same elements and the same order with the name in `categories` of annotations. MMDetection automatically maps the uncontinuous `id` in `categories` to the continuous label indices, so the string order of `name` in `categories` field affects the order of label indices. Meanwhile, the string order of `classes` in config affects the label text during visualization of predicted bounding boxes.
3. The `category_id` in annotations field should be valid, i.e., all values in `category_id` should belong to `id` in `categories`.

Here is a valid example of annotations:

```

'annotations': [
    {
        'segmentation': [[192.81,
                          247.09,
                          ...
                          219.03,
                          249.06]], # if you have mask labels
        'area': 1035.749,
        'iscrowd': 0,
        'image_id': 1268,
        'bbox': [192.81, 224.8, 74.73, 33.43],
        'category_id': 16,
        'id': 42986
    },
    ...
],

# MMDetection automatically maps the uncontinuous `id` to the continuous label indices.
'categories': [
    {'id': 1, 'name': 'a'}, {'id': 3, 'name': 'b'}, {'id': 4, 'name': 'c'}, {'id': 16,
    → 'name': 'd'}, {'id': 17, 'name': 'e'},
]

```

We use this way to support CityScapes dataset. The script is in `cityscapes.py` and we also provide the finetuning configs.

### Note

1. For instance segmentation datasets, **MMDetection only supports evaluating mask AP of dataset in COCO format for now.**

2. It is recommended to convert the data offline before training, thus you can still use CocoDataset and only need to modify the path of annotations and the training classes.

### Reorganize new data format to middle format

It is also fine if you do not want to convert the annotation format to COCO or PASCAL format. Actually, we define a simple annotation format in MMEngine's [BaseDataset](#) and all existing datasets are processed to be compatible with it, either online or offline.

The annotation of the dataset must be in json or yaml, yml or pickle, pkl format; the dictionary stored in the annotation file must contain two fields `metainfo` and `data_list`. The `metainfo` is a dictionary, which contains the metadata of the dataset, such as class information; `data_list` is a list, each element in the list is a dictionary, the dictionary defines the raw data of one image, and each raw data contains a or several training/testing samples.

Here is an example.

```
{
  'metainfo':
    {
      'classes': ('person', 'bicycle', 'car', 'motorcycle'),
      ...
    },
  'data_list':
    [
      {
        "img_path": "xxx/xxx_1.jpg",
        "height": 604,
        "width": 640,
        "instances":
          [
            {
              "bbox": [0, 0, 10, 20],
              "bbox_label": 1,
              "ignore_flag": 0
            },
            {
              "bbox": [10, 10, 110, 120],
              "bbox_label": 2,
              "ignore_flag": 0
            }
          ]
      },
      {
        "img_path": "xxx/xxx_2.jpg",
        "height": 320,
        "width": 460,
        "instances":
          [
            {
              "bbox": [10, 0, 20, 20],
              "bbox_label": 3,
              "ignore_flag": 1,
            }
          ]
      }
    ]
}
```

(continues on next page)

(continued from previous page)

```

        },
        ...
    ]
}

```

Some datasets may provide annotations like crowd/difficult/ignored bboxes, we use `ignore_flag` to cover them.

After obtaining the above standard data annotation format, you can directly use `BaseDetDataset` of MMDetection in the configuration, without conversion.

### An example of customized dataset

Assume the annotation is in a new format in text files. The bounding boxes annotations are stored in text file `annotation.txt` as the following

```

#
000001.jpg
1280 720
2
10 20 40 60 1
20 40 50 60 2
#
000002.jpg
1280 720
3
50 20 40 60 2
20 40 30 45 2
30 40 50 60 3

```

We can create a new dataset in `mmdet/datasets/my_dataset.py` to load the data.

```

import mmengine

from mmdet.base_det_dataset import BaseDetDataset
from mmdet.registry import DATASETS

@DATASETS.register_module()
class MyDataset(BaseDetDataset):

    METAINFO = {
        'classes': ('person', 'bicycle', 'car', 'motorcycle'),
        'palette': [(220, 20, 60), (119, 11, 32), (0, 0, 142), (0, 0, 230)]
    }

    def load_data_list(self, ann_file):
        ann_list = mmengine.list_from_file(ann_file)

        data_infos = []
        for i, ann_line in enumerate(ann_list):
            if ann_line != '#':
                continue

```

(continues on next page)

(continued from previous page)

```

img_shape = ann_list[i + 2].split(' ')
width = int(img_shape[0])
height = int(img_shape[1])
bbox_number = int(ann_list[i + 3])

instances = []
for anns in ann_list[i + 4:i + 4 + bbox_number]:
    instance = {}
    instance['bbox'] = [float(ann) for ann in anns.split(' ')[4:]]
    instance['bbox_label']=int(anns[4])
    instances.append(instance)

data_infos.append(
    dict(
        img_path=ann_list[i + 1],
        img_id=i,
        width=width,
        height=height,
        instances=instances
    ))

return data_infos

```

Then in the config, to use MyDataset you can modify the config as the following

```

dataset_A_train = dict(
    type='MyDataset',
    ann_file = 'image_list.txt',
    pipeline=train_pipeline
)

```

### 6.3.2 Customize datasets by dataset wrappers

MMEEngine also supports many dataset wrappers to mix the dataset or modify the dataset distribution for training. Currently it supports to three dataset wrappers as below:

- RepeatDataset: simply repeat the whole dataset.
- ClassBalancedDataset: repeat dataset in a class balanced manner.
- ConcatDataset: concat datasets.

For detailed usage, see MMEEngine Dataset Wrapper.

### 6.3.3 Modify Dataset Classes

With existing dataset types, we can modify the metainfo of them to train subset of the annotations. For example, if you want to train only three classes of the current dataset, you can modify the classes of dataset. The dataset will filter out the ground truth boxes of other classes automatically.

```
classes = ('person', 'bicycle', 'car')
train_dataloader = dict(
    dataset=dict(
        metainfo=dict(classes=classes))
)
val_dataloader = dict(
    dataset=dict(
        metainfo=dict(classes=classes))
)
test_dataloader = dict(
    dataset=dict(
        metainfo=dict(classes=classes))
)
```

**Note:**

- Before MMDetection v2.5.0, the dataset will filter out the empty GT images automatically if the classes are set and there is no way to disable that through config. This is an undesirable behavior and introduces confusion because if the classes are not set, the dataset only filter the empty GT images when `filter_empty_gt=True` and `test_mode=False`. After MMDetection v2.5.0, we decouple the image filtering process and the classes modification, i.e., the dataset will only filter empty GT images when `filter_cfg=dict(filter_empty_gt=True)` and `test_mode=False`, no matter whether the classes are set. Thus, setting the classes only influences the annotations of classes used for training and users could decide whether to filter empty GT images by themselves.
- When directly using `BaseDataset` in `MMEngine` or `BaseDetDataset` in `MMDetection`, users cannot filter images without GT by modifying the configuration, but it can be solved in an offline way.
- Please remember to modify the `num_classes` in the head when specifying `classes` in dataset. We implemented `NumClassCheckHook` to check whether the numbers are consistent since v2.9.0(after PR#4508).

### 6.3.4 COCO Panoptic Dataset

Now we support COCO Panoptic Dataset, the format of panoptic annotations is different from COCO format. Both the foreground and the background will exist in the annotation file. The annotation json files in COCO Panoptic format has the following necessary keys:

```
'images': [
    {
        'file_name': '0000000001268.jpg',
        'height': 427,
        'width': 640,
        'id': 1268
    },
    ...
]

'annotations': [
    {
```

(continues on next page)

(continued from previous page)

```

        'filename': '0000000001268.jpg',
        'image_id': 1268,
        'segments_info': [
            {
                'id': 8345037, # One-to-one correspondence with the id in the annotation.
↪map.
                'category_id': 51,
                'iscrowd': 0,
                'bbox': (x1, y1, w, h), # The bbox of the background is the outer.
↪rectangle of its mask.
                'area': 24315
            },
            ...
        ]
    },
    ...
]

'categories': [ # including both foreground categories and background categories
    {'id': 0, 'name': 'person'},
    ...
]

```

Moreover, the seg must be set to the path of the panoptic annotation images.

```

dataset_type = 'CocoPanopticDataset'
data_root='path/to/your/'

train_dataloader = dict(
    dataset=dict(
        type=dataset_type,
        data_root=data_root,
        data_prefix=dict(
            img='train/image_data/', seg='train/panoptic/image_annotation_data/'
        )
    )
)
val_dataloader = dict(
    dataset=dict(
        type=dataset_type,
        data_root=data_root,
        data_prefix=dict(
            img='val/image_data/', seg='val/panoptic/image_annotation_data/'
        )
    )
)
test_dataloader = dict(
    dataset=dict(
        type=dataset_type,
        data_root=data_root,
        data_prefix=dict(
            img='test/image_data/', seg='test/panoptic/image_annotation_data/'
        )
    )
)

```

## 6.4 Customize Data Pipelines

1. Write a new transform in a file, e.g., in `my_pipeline.py`. It takes a dict as input and returns a dict.

```
import random
from mmcv.transforms import BaseTransform
from mmdet.registry import TRANSFORMS

@TRANSFORMS.register_module()
class MyTransform(BaseTransform):
    """Add your transform

    Args:
        p (float): Probability of shifts. Default 0.5.
    """

    def __init__(self, prob=0.5):
        self.prob = prob

    def transform(self, results):
        if random.random() > self.prob:
            results['dummy'] = True
        return results
```

2. Import and use the pipeline in your config file. Make sure the import is relative to where your train script is located.

```
custom_imports = dict(imports=['path.to.my_pipeline'], allow_failed_imports=False)

train_pipeline = [
    dict(type='LoadImageFromFile'),
    dict(type='LoadAnnotations', with_bbox=True),
    dict(type='Resize', scale=(1333, 800), keep_ratio=True),
    dict(type='RandomFlip', prob=0.5),
    dict(type='MyTransform', prob=0.2),
    dict(type='PackDetInputs')
]
```

3. Visualize the output of your transforms pipeline

To visualize the output of your transforms pipeline, `tools/misc/browse_dataset.py` can help the user to browse a detection dataset (both images and bounding box annotations) visually, or save the image to a designated directory. More details can refer to [visualization documentation](#)

## 6.5 Customize Runtime Settings

### 6.5.1 Customize optimization settings

Optimization related configuration is now all managed by `optim_wrapper` which usually has three fields: `optimizer`, `paramwise_cfg`, `clip_grad`, refer to [OptimWrapper](#) for more detail. See the example below, where Adamw is used as an optimizer, the learning rate of the backbone is reduced by a factor of 10, and gradient clipping is added.

```
optim_wrapper = dict(
    type='OptimWrapper',
    # optimizer
    optimizer=dict(
        type='AdamW',
        lr=0.0001,
        weight_decay=0.05,
        eps=1e-8,
        betas=(0.9, 0.999)),

    # Parameter-level learning rate and weight decay settings
    paramwise_cfg=dict(
        custom_keys={
            'backbone': dict(lr_mult=0.1, decay_mult=1.0),
        },
        norm_decay_mult=0.0),

    # gradient clipping
    clip_grad=dict(max_norm=0.01, norm_type=2))
```

#### Customize optimizer supported by Pytorch

We already support to use all the optimizers implemented by PyTorch, and the only modification is to change the `optimizer` field in `optim_wrapper` field of config files. For example, if you want to use ADAM (note that the performance could drop a lot), the modification could be as the following.

```
optim_wrapper = dict(
    type='OptimWrapper',
    optimizer=dict(type='Adam', lr=0.0003, weight_decay=0.0001))
```

To modify the learning rate of the model, the users only need to modify the `lr` in `optimizer`. The users can directly set arguments following the [API doc](#) of PyTorch.

#### Customize self-implemented optimizer

##### 1. Define a new optimizer

A customized optimizer could be defined as following.

Assume you want to add a optimizer named `MyOptimizer`, which has arguments `a`, `b`, and `c`. You need to create a new directory named `mmdet/engine/optimizers`. And then implement the new optimizer in a file, e.g., in `mmdet/engine/optimizers/my_optimizer.py`:

```
from mmdet.registry import OPTIMIZERS
from torch.optim import Optimizer

@OPTIMIZERS.register_module()
class MyOptimizer(Optimizer):

    def __init__(self, a, b, c)
```

## 2. Add the optimizer to registry

To find the above module defined above, this module should be imported into the main namespace at first. There are two options to achieve it.

- Modify `mmdet/engine/optimizers/__init__.py` to import it.

The newly defined module should be imported in `mmdet/engine/optimizers/__init__.py` so that the registry will find the new module and add it:

```
from .my_optimizer import MyOptimizer
```

- Use `custom_imports` in the config to manually import it

```
custom_imports = dict(imports=['mmdet.engine.optimizers.my_optimizer'], allow_failed_
↳ imports=False)
```

The module `mmdet.engine.optimizers.my_optimizer` will be imported at the beginning of the program and the class `MyOptimizer` is then automatically registered. Note that only the package containing the class `MyOptimizer` should be imported. `mmdet.engine.optimizers.my_optimizer.MyOptimizer` **cannot** be imported directly.

Actually users can use a totally different file directory structure using this importing method, as long as the module root can be located in `PYTHONPATH`.

## 3. Specify the optimizer in the config file

Then you can use `MyOptimizer` in `optimizer` field in `optim_wrapper` field of config files. In the configs, the optimizers are defined by the field `optimizer` like the following:

```
optim_wrapper = dict(
    type='OptimWrapper',
    optimizer=dict(type='SGD', lr=0.02, momentum=0.9, weight_decay=0.0001))
```

To use your own optimizer, the field can be changed to

```
optim_wrapper = dict(
    type='OptimWrapper',
    optimizer=dict(type='MyOptimizer', a=a_value, b=b_value, c=c_value))
```

## Customize optimizer wrapper constructor

Some models may have some parameter-specific settings for optimization, e.g. weight decay for BatchNorm layers. The users can do those fine-grained parameter tuning through customizing optimizer wrapper constructor.

```
from mmengine.optim import DefaultOptiWrapperConstructor

from mmdet.registry import OPTIM_WRAPPER_CONSTRUCTORS
from .my_optimizer import MyOptimizer

@OPTIM_WRAPPER_CONSTRUCTORS.register_module()
class MyOptimizerWrapperConstructor(DefaultOptiWrapperConstructor):

    def __init__(self,
                 optim_wrapper_cfg: dict,
                 paramwise_cfg: Optional[dict] = None):

    def __call__(self, model: nn.Module) -> OptimWrapper:

        return optim_wrapper
```

The default optimizer wrapper constructor is implemented [here](#), which could also serve as a template for the new optimizer wrapper constructor.

## Additional settings

Tricks not implemented by the optimizer should be implemented through optimizer wrapper constructor (e.g., set parameter-wise learning rates) or hooks. We list some common settings that could stabilize the training or accelerate the training. Feel free to create PR, issue for more settings.

- **Use gradient clip to stabilize training:** Some models need gradient clip to clip the gradients to stabilize the training process. An example is as below:

```
optim_wrapper = dict(
    _delete_=True, clip_grad=dict(max_norm=35, norm_type=2))
```

If your config inherits the base config which already sets the `optim_wrapper`, you might need `_delete_=True` to override the unnecessary settings. See the [config documentation](#) for more details.

- **Use momentum schedule to accelerate model convergence:** We support momentum scheduler to modify model's momentum according to learning rate, which could make the model converge in a faster way. Momentum scheduler is usually used with LR scheduler, for example, the following config is used in [3D detection](#) to accelerate convergence. For more details, please refer to the implementation of [CosineAnnealingLR](#) and [CosineAnnealingMomentum](#).

```
param_scheduler = [
    # learning rate scheduler
    # During the first 8 epochs, learning rate increases from 0 to lr * 10
    # during the next 12 epochs, learning rate decreases from lr * 10 to lr * 1e-4
    dict(
        type='CosineAnnealingLR',
        T_max=8,
```

(continues on next page)

(continued from previous page)

```

        eta_min=lr * 10,
        begin=0,
        end=8,
        by_epoch=True,
        convert_to_iter_based=True),
    dict(
        type='CosineAnnealingLR',
        T_max=12,
        eta_min=lr * 1e-4,
        begin=8,
        end=20,
        by_epoch=True,
        convert_to_iter_based=True),
    # momentum scheduler
    # During the first 8 epochs, momentum increases from 0 to 0.85 / 0.95
    # during the next 12 epochs, momentum increases from 0.85 / 0.95 to 1
    dict(
        type='CosineAnnealingMomentum',
        T_max=8,
        eta_min=0.85 / 0.95,
        begin=0,
        end=8,
        by_epoch=True,
        convert_to_iter_based=True),
    dict(
        type='CosineAnnealingMomentum',
        T_max=12,
        eta_min=1,
        begin=8,
        end=20,
        by_epoch=True,
        convert_to_iter_based=True)
]

```

## 6.5.2 Customize training schedules

By default we use step learning rate with 1x schedule, this calls `MultiStepLR` in MMEEngine. We support many other learning rate schedule [here](#), such as `CosineAnnealingLR` and `PolyLR` schedule. Here are some examples

- Poly schedule:

```

param_scheduler = [
    dict(
        type='PolyLR',
        power=0.9,
        eta_min=1e-4,
        begin=0,
        end=8,
        by_epoch=True)]

```

- ConsineAnnealing schedule:

```
param_scheduler = [
    dict(
        type='CosineAnnealingLR',
        T_max=8,
        eta_min=lr * 1e-5,
        begin=0,
        end=8,
        by_epoch=True)]
```

### 6.5.3 Customize train loop

By default, EpochBasedTrainLoop is used in train\_cfg and validation is done after every train epoch, as follows.

```
train_cfg = dict(type='EpochBasedTrainLoop', max_epochs=12, val_begin=1, val_interval=1)
```

Actually, both IterBasedTrainLoop and EpochBasedTrainLoop support dynamical interval, see the following example.

```
# Before 365001th iteration, we do evaluation every 5000 iterations.
# After 365000th iteration, we do evaluation every 368750 iterations,
# which means that we do evaluation at the end of training.

interval = 5000
max_iters = 368750
dynamic_intervals = [(max_iters // interval * interval + 1, max_iters)]
train_cfg = dict(
    type='IterBasedTrainLoop',
    max_iters=max_iters,
    val_interval=interval,
    dynamic_intervals=dynamic_intervals)
```

### 6.5.4 Customize hooks

#### Customize self-implemented hooks

##### 1. Implement a new hook

MMEngine provides many useful [hooks](#), but there are some occasions when the users might need to implement a new hook. MMDetection supports customized hooks in training in v3.0. Thus the users could implement a hook directly in mmdet or their mmdet-based codebases and use the hook by only modifying the config in training. Here we give an example of creating a new hook in mmdet and using it in training.

```
from mmengine.hooks import Hook
from mmdet.registry import HOOKS

@HOOKS.register_module()
class MyHook(Hook):
```

(continues on next page)

(continued from previous page)

```

def __init__(self, a, b):

def before_run(self, runner) -> None:

def after_run(self, runner) -> None:

def before_train(self, runner) -> None:

def after_train(self, runner) -> None:

def before_train_epoch(self, runner) -> None:

def after_train_epoch(self, runner) -> None:

def before_train_iter(self,
                        runner,
                        batch_idx: int,
                        data_batch: DATA_BATCH = None) -> None:

def after_train_iter(self,
                     runner,
                     batch_idx: int,
                     data_batch: DATA_BATCH = None,
                     outputs: Optional[dict] = None) -> None:

```

Depending on the functionality of the hook, the users need to specify what the hook will do at each stage of the training in `before_run`, `after_run`, `before_train`, `after_train`, `before_train_epoch`, `after_train_epoch`, `before_train_iter`, and `after_train_iter`. There are more points where hooks can be inserted, refer to [base hook class](#) for more detail.

## 2. Register the new hook

Then we need to make `MyHook` imported. Assuming the file is in `mmdet/engine/hooks/my_hook.py` there are two ways to do that:

- Modify `mmdet/engine/hooks/__init__.py` to import it.

The newly defined module should be imported in `mmdet/engine/hooks/__init__.py` so that the registry will find the new module and add it:

```
from .my_hook import MyHook
```

- Use `custom_imports` in the config to manually import it

```
custom_imports = dict(imports=['mmdet.engine.hooks.my_hook'], allow_failed_imports=False)
```

### 3. Modify the config

```
custom_hooks = [
    dict(type='MyHook', a=a_value, b=b_value)
]
```

You can also set the priority of the hook by adding key `priority` to 'NORMAL' or 'HIGHEST' as below

```
custom_hooks = [
    dict(type='MyHook', a=a_value, b=b_value, priority='NORMAL')
]
```

By default the hook's priority is set as NORMAL during registration.

### Use hooks implemented in MMDetection

If the hook is already implemented in MMDetection, you can directly modify the config to use the hook as below

#### Example: NumClassCheckHook

We implement a customized hook named NumClassCheckHook to check whether the `num_classes` in head matches the length of `classes` in the meta info of dataset.

We set it in `default_runtime.py`.

```
custom_hooks = [dict(type='NumClassCheckHook')]
```

### Modify default runtime hooks

There are some common hooks that are registered through `default_hooks`, they are

- **IterTimerHook**: A hook that logs 'data\_time' for loading data and 'time' for a model train step.
- **LoggerHook**: A hook that Collect logs from different components of Runner and write them to terminal, JSON file, tensorboard and wandb .etc.
- **ParamSchedulerHook**: A hook to update some hyper-parameters in optimizer, e.g., learning rate and momentum.
- **CheckpointHook**: A hook that saves checkpoints periodically.
- **DistSamplerSeedHook**: A hook that sets the seed for sampler and batch\_sampler.
- **DetVisualizationHook**: A hook used to visualize validation and testing process prediction results.

IterTimerHook, ParamSchedulerHook and DistSamplerSeedHook are simple and no need to be modified usually, so here we reveals how what we can do with LoggerHook, CheckpointHook and DetVisualizationHook.

## CheckpointHook

Except saving checkpoints periodically, `CheckpointHook` provides other options such as `max_keep_ckpts`, `save_optimizer` and etc. The users could set `max_keep_ckpts` to only save small number of checkpoints or decide whether to store state dict of optimizer by `save_optimizer`. More details of the arguments are [here](#)

```
default_hooks = dict(
    checkpoint=dict(
        type='CheckpointHook',
        interval=1,
        max_keep_ckpts=3,
        save_optimizer=True))
```

## LoggerHook

The `LoggerHook` enables to set intervals. And the detail usages can be found in the `docstring`.

```
default_hooks = dict(logger=dict(type='LoggerHook', interval=50))
```

## DetVisualizationHook

`DetVisualizationHook` use `DetLocalVisualizer` to visualize prediction results, and `DetLocalVisualizer` current supports different backends, e.g., `TensorboardVisBackend` and `WandbVisBackend` (see `docstring` for more detail). The users could add multi backends to do visualization, as follows.

```
default_hooks = dict(
    visualization=dict(type='DetVisualizationHook', draw=True))

vis_backends = [dict(type='LocalVisBackend'),
                dict(type='TensorboardVisBackend')]

visualizer = dict(
    type='DetLocalVisualizer', vis_backends=vis_backends, name='visualizer')
```

## HOW TO

This tutorial collects answers to any How to xxx with MMDetection. Feel free to update this doc if you meet new questions about How to and find the answers!

### 7.1 Use backbone network through MMClassification

The model registry in MMDet, MMCls, MMSeg all inherit from the root registry in MMEngine. This allows these repositories to directly use the modules already implemented by each other. Therefore, users can use backbone networks from MMClassification in MMDetection without implementing a network that already exists in MMClassification.

#### 7.1.1 Use backbone network implemented in MMClassification

Suppose you want to use MobileNetV3-small as the backbone network of RetinaNet, the example config is as the following.

```
_base_ = [
    '../_base_/models/retinanet_r50_fpn.py',
    '../_base_/datasets/coco_detection.py',
    '../_base_/schedules/schedule_1x.py', '../_base_/default_runtime.py'
]
# please install mmcls>=1.0.0rc0
# import mmcls.models to trigger register_module in mmcls
custom_imports = dict(imports=['mmcls.models'], allow_failed_imports=False)
pretrained = 'https://download.openmmlab.com/mmdetection/v2.0/mobilenet_v3/convert/
↳mobilenet_v3_small-8427ecf0.pth'
model = dict(
    backbone=dict(
        _delete_=True, # Delete the backbone field in _base_
        type='mmcls.MobileNetV3', # Using MobileNetV3 from mmcls
        arch='small',
        out_indices=(3, 8, 11), # Modify out_indices
        init_cfg=dict(
            type='Pretrained',
            checkpoint=pretrained,
            prefix='backbone.'), # The pre-trained weights of backbone network in MMCls.
↳have prefix='backbone.'. The prefix in the keys will be removed so that these weights.
↳can be normally loaded.
        # Modify in_channels
        neck=dict(in_channels=[24, 48, 96], start_level=0))
```

### 7.1.2 Use backbone network in TIMM through MMClassification

MMClassification also provides a wrapper for the PyTorch Image Models (timm) backbone network, users can directly use the backbone network in timm through MMClassification. Suppose you want to use EfficientNet-B1 as the backbone network of RetinaNet, the example config is as the following.

```
# https://github.com/open-mmlab/mmdetection/blob/main/configs/timm\_example/retinanet\_
↪ timm\_efficientnet-b1\_fpn\_1x\_coco.py

_base_ = [
    '../_base_/models/retinanet_r50_fpn.py',
    '../_base_/datasets/coco_detection.py',
    '../_base_/schedules/schedule_1x.py', '../_base_/default_runtime.py'
]

# please install mmcls>=1.0.0rc0
# import mmcls.models to trigger register_module in mmcls
custom_imports = dict(imports=['mmcls.models'], allow_failed_imports=False)
model = dict(
    backbone=dict(
        _delete_=True, # Delete the backbone field in _base_
        type='mmcls.TIMMBackbone', # Using timm from mmcls
        model_name='efficientnet_b1',
        features_only=True,
        pretrained=True,
        out_indices=(1, 2, 3, 4)), # Modify out_indices
    neck=dict(in_channels=[24, 40, 112, 320])) # Modify in_channels

optimizer = dict(type='SGD', lr=0.01, momentum=0.9, weight_decay=0.0001)
```

`type='mmcls.TIMMBackbone'` means use the TIMMBackbone class from MMClassification in MMDetection, and the model used is EfficientNet-B1, where `mmcls` means the MMClassification repo and TIMMBackbone means the TIMMBackbone wrapper implemented in MMClassification.

For the principle of the Hierarchy Registry, please refer to the [MMEngine document](#). For how to use other backbones in MMClassification, you can refer to the [MMClassification document](#).

## 7.2 Use Mosaic augmentation

If you want to use Mosaic in training, please make sure that you use MultiImageMixDataset at the same time. Taking the 'Faster R-CNN' algorithm as an example, you should modify the values of `train_pipeline` and `train_dataset` in the config as below:

```
# Open configs/faster_rcnn/faster-rcnn_r50_fpn_1x_coco.py directly and add the following.
↪ fields
data_root = 'data/coco/'
dataset_type = 'CocoDataset'
img_scale=(1333, 800)

train_pipeline = [
    dict(type='Mosaic', img_scale=img_scale, pad_val=114.0),
    dict(
```

(continues on next page)

(continued from previous page)

```

        type='RandomAffine',
        scaling_ratio_range=(0.1, 2),
        border=(-img_scale[0] // 2, -img_scale[1] // 2)), # The image will be enlarged
        ↪ by 4 times after Mosaic processing, so we use affine transformation to restore the
        ↪ image size.
        dict(type='RandomFlip', prob=0.5),
        dict(type='PackDetInputs')
    ]

train_dataset = dict(
    _delete_ = True, # remove unnecessary Settings
    type='MultiImageMixDataset',
    dataset=dict(
        type=dataset_type,
        ann_file=data_root + 'annotations/instances_train2017.json',
        img_prefix=data_root + 'train2017/',
        pipeline=[
            dict(type='LoadImageFromFile'),
            dict(type='LoadAnnotations', with_bbox=True)
        ],
        filter_empty_gt=False,
    ),
    pipeline=train_pipeline
)

data = dict(
    train=train_dataset
)

```

## 7.3 Unfreeze backbone network after freezing the backbone in the config

If you have frozen the backbone network in the config and want to unfreeze it after some epoches, you can write a hook function to do it. Taking the Faster R-CNN with the resnet backbone as an example, you can freeze one stage of the backbone network and add a custom\_hooks in the config as below:

```

_base_ = [
    '../_base_/models/faster-rcnn_r50_fpn.py',
    '../_base_/datasets/coco_detection.py',
    '../_base_/schedules/schedule_1x.py', '../_base_/default_runtime.py'
]
model = dict(
    # freeze one stage of the backbone network.
    backbone=dict(frozen_stages=1),
)
custom_hooks = [dict(type="UnfreezeBackboneEpochBasedHook", unfreeze_epoch=1)]

```

Meanwhile write the hook class `UnfreezeBackboneEpochBasedHook` in `mmdet/core/hook/unfreeze_backbone_epoch_based_hook.py`

```

from mmengine.model import is_model_wrapper
from mmengine.hooks import Hook
from mmdet.registry import HOOKS

@HOOKS.register_module()
class UnfreezeBackboneEpochBasedHook(Hook):
    """Unfreeze backbone network Hook.

    Args:
        unfreeze_epoch (int): The epoch unfreezing the backbone network.
    """

    def __init__(self, unfreeze_epoch=1):
        self.unfreeze_epoch = unfreeze_epoch

    def before_train_epoch(self, runner):
        # Unfreeze the backbone network.
        # Only valid for resnet.
        if runner.epoch == self.unfreeze_epoch:
            model = runner.model
            if is_model_wrapper(model):
                model = model.module
            backbone = model.backbone
            if backbone.frozen_stages >= 0:
                if backbone.deep_stem:
                    backbone.stem.train()
                    for param in backbone.stem.parameters():
                        param.requires_grad = True
                else:
                    backbone.norm1.train()
                    for m in [backbone.conv1, backbone.norm1]:
                        for param in m.parameters():
                            param.requires_grad = True

            for i in range(1, backbone.frozen_stages + 1):
                m = getattr(backbone, f'layer{i}')
                m.train()
                for param in m.parameters():
                    param.requires_grad = True

```

## 7.4 Get the channels of a new backbone

If you want to get the channels of a new backbone, you can build this backbone alone and input a pseudo image to get each stage output.

Take ResNet as an example:

```

from mmdet.models import ResNet
import torch
self = ResNet(depth=18)

```

(continues on next page)

(continued from previous page)

```

self.eval()
inputs = torch.rand(1, 3, 32, 32)
level_outputs = self.forward(inputs)
for level_out in level_outputs:
    print(tuple(level_out.shape))

```

Output of the above script is as below:

```

(1, 64, 8, 8)
(1, 128, 4, 4)
(1, 256, 2, 2)
(1, 512, 1, 1)

```

Users can get the channels of the new backbone by Replacing the ResNet(depth=18) in this script with their customized backbone.

## 7.5 Use Detectron2 Model in MMDetection

Users can use Detectron2Wrapper to run Detectron2's model in MMDetection. We provide examples of Faster R-CNN, Mask R-CNN, and RetinaNet in MMDetection.

The algorithm components in config file should be the same as those of in Detectron2. During setup, we will first initialize the default settings, which can be found in [Detectron2](#). Then, the settings in config file will overwrite the default settings and the model will be built with these settings. The input data will first convert to Detectron2's type and feed into Detectron2's model. During inference the results calculate from Detectron2's model will reconvert back to the MMDetection's type.

### 7.5.1 Use Detectron2's pre-trained weights

The weight initialization in Detectron2Wrapper will not use the logic of MMDetection. Users can set `model.d2_detector.weights=xxx` to load pre-trained weights. For example, we can use `model.d2_detector.weights='detectron2://ImageNetPretrained/MSRA/R-50.pkl'` to load the pre-trained ResNet-50 or use `model.d2_detector.weights='detectron2://COCO-InstanceSegmentation/mask_rcnn_R_50_FPN_1x/137260431/model_final_a54504.pkl'` to load the pre-trained Mask R-CNN weights proposed in Detectron2.

**Note:** Detectron2's pretrained model cannot be loaded directly by using `load_from`, it should be first converted via `tools/model_converters/detectron2_to_mmdet.py`

For inference of released detectron2 checkpoints, users should first use `tools/model_converters/detectron2_to_mmdet.py` to convert Detectron2 checkpoint to MMDetection.

```

python tools/model_converters/detectron2_to_mmdet.py ${Detectron2 ckpt path} $
↪ {MMDetection ckpt path}

```



## MIGRATING FROM MMDetection 2.X TO 3.X

MMDetection 3.x is a significant update that includes many changes to API and configuration files. This document aims to help users migrate from MMDetection 2.x to 3.x. We divided the migration guide into the following sections:

- Configuration file migration
- API and Registry migration
- Dataset migration
- Model migration
- Frequently Asked Questions

If you encounter any problems during the migration process, feel free to raise an issue. We also welcome contributions to this document.



**MMDET.APIS**



## MMDet.DATASETS

### 10.1 datasets

### 10.2 api\_wrappers

**class** `mmdet.datasets.api_wrappers.COCO(*args: Any, **kwargs: Any)`

This class is almost the same as official pycocotools package.

It implements some snake case function aliases. So that the COCO class has the same interface as LVIS class.

**class** `mmdet.datasets.api_wrappers.COCOPanoptic(*args: Any, **kwargs: Any)`

This wrapper is for loading the panoptic style annotation file.

The format is shown in the CocoPanopticDataset class.

**Parameters** `annotation_file` (*str*, *optional*) – Path of annotation file. Defaults to None.

**createIndex()** → None

Create index.

**load\_anns** (*ids: Union[List[int], int] = []*) → Optional[List[dict]]

Load anns with the specified ids.

`self.anns` is a list of annotation lists instead of a list of annotations.

**Parameters** `ids` (*Union[List[int], int]*) – Integer ids specifying anns.

**Returns** Loaded ann objects.

**Return type** anns (List[dict], optional)

### 10.3 samplers

**class** `mmdet.datasets.samplers.AspectRatioBatchSampler(sampler: torch.utils.data.sampler.Sampler, batch_size: int, drop_last: bool = False)`

A sampler wrapper for grouping images with similar aspect ratio (< 1 or

>= 1) into a same batch.

**Parameters**

- **sampler** (*Sampler*) – Base sampler.
- **batch\_size** (*int*) – Size of mini-batch.

- **drop\_last** (*bool*) – If *True*, the sampler will drop the last batch if its size would be less than *batch\_size*.

```
class mmdet.datasets.samplers.ClassAwareSampler(dataset: mmengine.dataset.base_dataset.BaseDataset,
                                                seed: Optional[int] = None, num_sample_class: int = 1)
```

Sampler that restricts data loading to the label of the dataset.

A class-aware sampling strategy to effectively tackle the non-uniform class distribution. The length of the training data is consistent with source data. Simple improvements based on [Relay Backpropagation for Effective Learning of Deep Convolutional Neural Networks](#)

The implementation logic is referred to [https://github.com/Sense-X/TSD/blob/master/mmdet/datasets/samplers/distributed\\_classaware\\_sampler.py](https://github.com/Sense-X/TSD/blob/master/mmdet/datasets/samplers/distributed_classaware_sampler.py)

#### Parameters

- **dataset** – Dataset used for sampling.
- **seed** (*int*, *optional*) – random seed used to shuffle the sampler. This number should be identical across all processes in the distributed group. Defaults to *None*.
- **num\_sample\_class** (*int*) – The number of samples taken from each per-label list. Defaults to 1.

**get\_cat2imgs()** → Dict[int, list]

Get a dict with class as key and *img\_ids* as values.

**Returns** A dict of per-label image list, the item of the dict indicates a label index, corresponds to the image index that contains the label.

**Return type** dict[int, list]

**set\_epoch**(*epoch: int*) → *None*

Sets the epoch for this sampler.

When *shuffle=True*, this ensures all replicas use a different random ordering for each epoch. Otherwise, the next iteration of this sampler will yield the same ordering.

**Parameters** **epoch** (*int*) – Epoch number.

```
class mmdet.datasets.samplers.GroupMultiSourceSampler(dataset:
                                                        mmengine.dataset.base_dataset.BaseDataset,
                                                        batch_size: int, source_ratio: List[Union[int,
                                                        float]], shuffle: bool = True, seed:
                                                        Optional[int] = None)
```

Group Multi-Source Infinite Sampler.

According to the sampling ratio, sample data from different datasets but the same group to form batches.

#### Parameters

- **dataset** (*Sized*) – The dataset.
- **batch\_size** (*int*) – Size of mini-batch.
- **source\_ratio** (*list[int | float]*) – The sampling ratio of different source datasets in a mini-batch.
- **shuffle** (*bool*) – Whether shuffle the dataset or not. Defaults to *True*.
- **seed** (*int*, *optional*) – Random seed. If *None*, set a random seed. Defaults to *None*.

```
class mmdet.datasets.samplers.MultiSourceSampler(dataset: Sized, batch_size: int, source_ratio:
                                                List[Union[int, float]], shuffle: bool = True, seed:
                                                Optional[int] = None)
```

Multi-Source Infinite Sampler.

According to the sampling ratio, sample data from different datasets to form batches.

#### Parameters

- **dataset** (*Sized*) – The dataset.
- **batch\_size** (*int*) – Size of mini-batch.
- **source\_ratio** (*list[int | float]*) – The sampling ratio of different source datasets in a mini-batch.
- **shuffle** (*bool*) – Whether shuffle the dataset or not. Defaults to True.
- **seed** (*int, optional*) – Random seed. If None, set a random seed. Defaults to None.

#### Examples

```
>>> dataset_type = 'ConcatDataset'
>>> sub_dataset_type = 'CocoDataset'
>>> data_root = 'data/coco/'
>>> sup_ann = '../coco_semi_annos/instances_train2017.1@10.json'
>>> unsup_ann = '../coco_semi_annos/' \
>>>             'instances_train2017.1@10-unlabeled.json'
>>> dataset = dict(type=dataset_type,
>>>                 datasets=[
>>>                     dict(
>>>                         type=sub_dataset_type,
>>>                         data_root=data_root,
>>>                         ann_file=sup_ann,
>>>                         data_prefix=dict(img='train2017/'),
>>>                         filter_cfg=dict(filter_empty_gt=True, min_size=32),
>>>                         pipeline=sup_pipeline),
>>>                     dict(
>>>                         type=sub_dataset_type,
>>>                         data_root=data_root,
>>>                         ann_file=unsup_ann,
>>>                         data_prefix=dict(img='train2017/'),
>>>                         filter_cfg=dict(filter_empty_gt=True, min_size=32),
>>>                         pipeline=unsup_pipeline),
>>>                 ])
>>> train_dataloader = dict(
>>>     batch_size=5,
>>>     num_workers=5,
>>>     persistent_workers=True,
>>>     sampler=dict(type='MultiSourceSampler',
>>>                  batch_size=5, source_ratio=[1, 4]),
>>>     batch_sampler=None,
>>>     dataset=dataset)
```

**set\_epoch**(*epoch: int*) → None

Not supported in epoch-based runner.

## 10.4 transforms

## MMDet.Engine

### 11.1 hooks

**class** `mmdet.engine.hooks.CheckInvalidLossHook`(*interval: int = 50*)  
Check invalid loss hook.

This hook will regularly check whether the loss is valid during training.

**Parameters** `interval (int)` – Checking interval (every k iterations). Default: 50.

**after\_train\_iter**(*runner: mmengine.runner.runner.Runner, batch\_idx: int, data\_batch: Optional[dict] = None, outputs: Optional[dict] = None*) → None  
Regularly check whether the loss is valid every n iterations.

**Parameters**

- **runner** (`Runner`) – The runner of the training process.
- **batch\_idx** (`int`) – The index of the current batch in the train loop.
- **data\_batch** (`dict, Optional`) – Data from dataloader. Defaults to None.
- **outputs** (`dict, Optional`) – Outputs from model. Defaults to None.

**class** `mmdet.engine.hooks.DetVisualizationHook`(*draw: bool = False, interval: int = 50, score\_thr: float = 0.3, show: bool = False, wait\_time: float = 0.0, test\_out\_dir: Optional[str] = None, backend\_args: Optional[dict] = None*)

Detection Visualization Hook. Used to visualize validation and testing process prediction results.

In the testing phase:

1. If **show** is **True**, it means that only the prediction results are visualized without storing data, so `vis_backends` needs to be excluded.
2. If **test\_out\_dir** is specified, it means that the prediction results need to be saved to `test_out_dir`. In order to avoid `vis_backends` also storing data, so `vis_backends` needs to be excluded.
3. **vis\_backends** takes effect if the user does not specify **show** and `test_out_dir`. You can set `vis_backends` to `WandbVisBackend` or `TensorboardVisBackend` to store the prediction result in `Wandb` or `Tensorboard`.

**Parameters**

- **draw** (`bool`) – whether to draw prediction results. If it is `False`, it means that no drawing will be done. Defaults to `False`.
- **interval** (`int`) – The interval of visualization. Defaults to 50.

- **score\_thr** (*float*) – The threshold to visualize the bboxes and masks. Defaults to 0.3.
- **show** (*bool*) – Whether to display the drawn image. Default to False.
- **wait\_time** (*float*) – The interval of show (s). Defaults to 0.
- **test\_out\_dir** (*str*, *optional*) – directory where painted images will be saved in testing process.
- **backend\_args** (*dict*, *optional*) – Arguments to instantiate the corresponding backend. Defaults to None.

**after\_test\_iter**(*runner: mmengine.runner.runner.Runner*, *batch\_idx: int*, *data\_batch: dict*, *outputs: Sequence[mmdet.structures.det\_data\_sample.DetDataSample]*) → None

Run after every testing iterations.

#### Parameters

- **runner** (*Runner*) – The runner of the testing process.
- **batch\_idx** (*int*) – The index of the current batch in the val loop.
- **data\_batch** (*dict*) – Data from dataloader.
- **outputs** (*Sequence[DetDataSample]*) – A batch of data samples that contain annotations and predictions.

**after\_val\_iter**(*runner: mmengine.runner.runner.Runner*, *batch\_idx: int*, *data\_batch: dict*, *outputs: Sequence[mmdet.structures.det\_data\_sample.DetDataSample]*) → None

Run after every `self.interval` validation iterations.

#### Parameters

- **runner** (*Runner*) – The runner of the validation process.
- **batch\_idx** (*int*) – The index of the current batch in the val loop.
- **data\_batch** (*dict*) – Data from dataloader.
- **outputs** (*Sequence[DetDataSample]*) – A batch of data samples that contain annotations and predictions.

**class** `mmdet.engine.hooks.MeanTeacherHook`(*momentum: float = 0.001*, *interval: int = 1*, *skip\_buffer=True*)  
Mean Teacher Hook.

Mean Teacher is an efficient semi-supervised learning method in [Mean Teacher](#). This method requires two models with exactly the same structure, as the student model and the teacher model, respectively. The student model updates the parameters through gradient descent, and the teacher model updates the parameters through exponential moving average of the student model. Compared with the student model, the teacher model is smoother and accumulates more knowledge.

#### Parameters

- **momentum** (*float*) –  
**The momentum used for updating teacher's parameter.** Teacher's parameter are updated with the formula:  
$$teacher = (1 - momentum) * teacher + momentum * student.$$
 Defaults to 0.001.
- **interval** (*int*) – Update teacher's parameter every interval iteration. Defaults to 1.
- **skip\_buffers** (*bool*) – Whether to skip the model buffers, such as batchnorm running stats (running\_mean, running\_var), it does not perform the ema operation. Default to True.

**after\_train\_iter**(runner: *mmengine.runner.runner.Runner*, batch\_idx: *int*, data\_batch: *Optional[dict] = None*, outputs: *Optional[dict] = None*) → *None*

Update teacher's parameter every self.interval iterations.

**before\_train**(runner: *mmengine.runner.runner.Runner*) → *None*

To check that teacher model and student model exist.

**momentum\_update**(model: *torch.nn.modules.module.Module*, momentum: *float*) → *None*

Compute the moving average of the parameters using exponential moving average.

**class** mmdet.engine.hooks.**MemoryProfilerHook**(interval: *int* = 50)

Memory profiler hook recording memory information including virtual memory, swap memory, and the memory of the current process.

**Parameters** **interval** (*int*) – Checking interval (every k iterations). Default: 50.

**after\_test\_iter**(runner: *mmengine.runner.runner.Runner*, batch\_idx: *int*, data\_batch: *Optional[dict] = None*, outputs: *Optional[Sequence[mmdet.structures.det\_data\_sample.DetDataSample]] = None*) → *None*

Regularly record memory information.

**Parameters**

- **runner** (*Runner*) – The runner of the testing process.
- **batch\_idx** (*int*) – The index of the current batch in the test loop.
- **data\_batch** (*dict*, *optional*) – Data from dataloader. Defaults to *None*.
- **outputs** (*Sequence[DetDataSample]*, *optional*) – Outputs from model. Defaults to *None*.

**after\_train\_iter**(runner: *mmengine.runner.runner.Runner*, batch\_idx: *int*, data\_batch: *Optional[dict] = None*, outputs: *Optional[dict] = None*) → *None*

Regularly record memory information.

**Parameters**

- **runner** (*Runner*) – The runner of the training process.
- **batch\_idx** (*int*) – The index of the current batch in the train loop.
- **data\_batch** (*dict*, *optional*) – Data from dataloader. Defaults to *None*.
- **outputs** (*dict*, *optional*) – Outputs from model. Defaults to *None*.

**after\_val\_iter**(runner: *mmengine.runner.runner.Runner*, batch\_idx: *int*, data\_batch: *Optional[dict] = None*, outputs: *Optional[Sequence[mmdet.structures.det\_data\_sample.DetDataSample]] = None*) → *None*

Regularly record memory information.

**Parameters**

- **runner** (*Runner*) – The runner of the validation process.
- **batch\_idx** (*int*) – The index of the current batch in the val loop.
- **data\_batch** (*dict*, *optional*) – Data from dataloader. Defaults to *None*.
- **outputs** (*Sequence[DetDataSample]*, *optional*) – Outputs from model. Defaults to *None*.

**class** mmdet.engine.hooks.**NumClassCheckHook**

Check whether the *num\_classes* in head matches the length of *classes* in *dataset.metainfo*.

**before\_train\_epoch**(runner: *mmengine.runner.runner.Runner*) → *None*

Check whether the training dataset is compatible with head.

**Parameters runner** (*Runner*) – The runner of the training or evaluation process.

**before\_val\_epoch**(*runner: mmengine.runner.runner.Runner*) → None  
Check whether the dataset in val epoch is compatible with head.

**Parameters runner** (*Runner*) – The runner of the training or evaluation process.

**class** `mmdet.engine.hooks.PipelineSwitchHook`(*switch\_epoch, switch\_pipeline*)  
Switch data pipeline at switch\_epoch.

**Parameters**

- **switch\_epoch** (*int*) – switch pipeline at this epoch.
- **switch\_pipeline** (*list[dict]*) – the pipeline to switch to.

**before\_train\_epoch**(*runner*)  
switch pipeline.

**class** `mmdet.engine.hooks.SetEpochInfoHook`  
Set runner's epoch information to the model.

**before\_train\_epoch**(*runner*)  
All subclasses should override this method, if they need any operations before each training epoch.

**Parameters runner** (*Runner*) – The runner of the training process.

**class** `mmdet.engine.hooks.SyncNormHook`  
Synchronize Norm states before validation, currently used in YOLOX.

**before\_val\_epoch**(*runner*)  
Synchronizing norm.

**class** `mmdet.engine.hooks.YOLOXModeSwitchHook`(*num\_last\_epochs: int = 15, skip\_type\_keys: Sequence[str] = ('Mosaic', 'RandomAffine', 'MixUp')*)

Switch the mode of YOLOX during training.

This hook turns off the mosaic and mixup data augmentation and switches to use L1 loss in bbox\_head.

**Parameters num\_last\_epochs** – The number of latter epochs in the end of the training to close the data augmentation and switch to L1 loss. Defaults to 15.

**before\_train\_epoch**(*runner*) → None  
Close mosaic and mixup augmentation and switches to use L1 loss.

## 11.2 optimizers

**class** `mmdet.engine.optimizers.LearningRateDecayOptimizerConstructor`(*optim\_wrapper\_cfg: dict, paramwise\_cfg: Optional[dict] = None*)

**add\_params**(*params: List[dict], module: torch.nn.modules.module.Module, \*\*kwargs*) → None  
Add all parameters of module to the params list.

The parameters of the given module will be added to the list of param groups, with specific rules defined by paramwise\_cfg.

**Parameters**

- **params** (*list[dict]*) – A list of param groups, it will be modified in place.
- **module** (*nn.Module*) – The module to be added.

## 11.3 runner

```
class mmdet.engine.runner.TeacherStudentValLoop(runner, dataloader:
    Union[torch.utils.data.dataloader.DataLoader, Dict],
    evaluator:
    Union[mmengine.evaluator.evaluator.Evaluator, Dict,
    List], fp16: bool = False)
    Loop for validation of model teacher and student.
    run()
        Launch validation for model teacher and student.
```

## 11.4 schedulers

```
class mmdet.engine.schedulers.QuadraticWarmupLR(optimizer, *args, **kwargs)
    Warm up the learning rate of each parameter group by quadratic formula.
```

### Parameters

- **optimizer** (*Optimizer*) – Wrapped optimizer.
- **begin** (*int*) – Step at which to start updating the parameters. Defaults to 0.
- **end** (*int*) – Step at which to stop updating the parameters. Defaults to INF.
- **last\_step** (*int*) – The index of last step. Used for resume without state dict. Defaults to -1.
- **by\_epoch** (*bool*) – Whether the scheduled parameters are updated by epochs. Defaults to True.
- **verbose** (*bool*) – Whether to print the value for each update. Defaults to False.

```
class mmdet.engine.schedulers.QuadraticWarmupMomentum(optimizer, *args, **kwargs)
    Warm up the momentum value of each parameter group by quadratic formula.
```

### Parameters

- **optimizer** (*Optimizer*) – Wrapped optimizer.
- **begin** (*int*) – Step at which to start updating the parameters. Defaults to 0.
- **end** (*int*) – Step at which to stop updating the parameters. Defaults to INF.
- **last\_step** (*int*) – The index of last step. Used for resume without state dict. Defaults to -1.
- **by\_epoch** (*bool*) – Whether the scheduled parameters are updated by epochs. Defaults to True.
- **verbose** (*bool*) – Whether to print the value for each update. Defaults to False.

```
class mmdet.engine.schedulers.QuadraticWarmupParamScheduler(optimizer:
    torch.optim.optimizer.Optimizer,
    param_name: str, begin: int = 0, end:
    int = 1000000000, last_step: int = - 1,
    by_epoch: bool = True, verbose: bool
    = False)
```

Warm up the parameter value of each parameter group by quadratic formula:

$$X_t = X_{t-1} + \frac{2t + 1}{(end - begin)^2} \times X_{base}$$

#### Parameters

- **optimizer** (*Optimizer*) – Wrapped optimizer.
- **param\_name** (*str*) – Name of the parameter to be adjusted, such as lr, momentum.
- **begin** (*int*) – Step at which to start updating the parameters. Defaults to 0.
- **end** (*int*) – Step at which to stop updating the parameters. Defaults to INF.
- **last\_step** (*int*) – The index of last step. Used for resume without state dict. Defaults to -1.
- **by\_epoch** (*bool*) – Whether the scheduled parameters are updated by epochs. Defaults to True.
- **verbose** (*bool*) – Whether to print the value for each update. Defaults to False.

```
classmethod build_iter_from_epoch(*args, begin=0, end=1000000000, by_epoch=True,
    epoch_length=None, **kwargs)
```

Build an iter-based instance of this scheduler from an epoch-based config.

## MMDet.EVALUATION

### 12.1 functional

`mmdet.evaluation.functional.average_precision(recalls, precisions, mode='area')`

Calculate average precision (for single or multiple scales).

**Parameters**

- **recalls** (*ndarray*) – shape (num\_scales, num\_dets) or (num\_dets, )
- **precisions** (*ndarray*) – shape (num\_scales, num\_dets) or (num\_dets, )
- **mode** (*str*) – ‘area’ or ‘11points’, ‘area’ means calculating the area under precision-recall curve, ‘11points’ means calculating the average precision of recalls at [0, 0.1, ..., 1]

**Returns** calculated average precision

**Return type** float or ndarray

`mmdet.evaluation.functional.bbox_overlaps(bboxes1, bboxes2, mode='iou', eps=1e-06, use_legacy_coordinate=False)`

Calculate the ious between each bbox of bboxes1 and bboxes2.

**Parameters**

- **bboxes1** (*ndarray*) – Shape (n, 4)
- **bboxes2** (*ndarray*) – Shape (k, 4)
- **mode** (*str*) – IOU (intersection over union) or IOF (intersection over foreground)
- **use\_legacy\_coordinate** (*bool*) – Whether to use coordinate system in mmdet v1.x. which means width, height should be calculated as ‘x2 - x1 + 1’ and ‘y2 - y1 + 1’ respectively. Note when function is used in *VOCDataset*, it should be True to align with the official implementation [http://host.robots.ox.ac.uk/pascal/VOC/voc2012/VOCdevkit\\_18-May-2011.tar](http://host.robots.ox.ac.uk/pascal/VOC/voc2012/VOCdevkit_18-May-2011.tar) Default: False.

**Returns** Shape (n, k)

**Return type** ious (ndarray)

`mmdet.evaluation.functional.cityscapes_classes()` → list  
Class names of Cityscapes.

`mmdet.evaluation.functional.coco_classes()` → list  
Class names of COCO.

`mmdet.evaluation.functional.coco_panoptic_classes()` → list  
Class names of COCO panoptic.

```
mmdet.evaluation.functional.eval_map(det_results, annotations, scale_ranges=None, iou_thr=0.5,  
                                     ioa_thr=None, dataset=None, logger=None, tpfp_fn=None,  
                                     nproc=4, use_legacy_coordinate=False, use_group_of=False,  
                                     eval_mode='area')
```

Evaluate mAP of a dataset.

#### Parameters

- **det\_results** (*list[list]*) – [[cls1\_det, cls2\_det, ...], ...]. The outer list indicates images, and the inner list indicates per-class detected bboxes.
- **annotations** (*list[dict]*) – Ground truth annotations where each item of the list indicates an image. Keys of annotations are:
  - *bboxes*: numpy array of shape (n, 4)
  - *labels*: numpy array of shape (n, )
  - *bboxes\_ignore* (optional): numpy array of shape (k, 4)
  - *labels\_ignore* (optional): numpy array of shape (k, )
- **scale\_ranges** (*list[tuple] | None*) – Range of scales to be evaluated, in the format [(min1, max1), (min2, max2), ...]. A range of (32, 64) means the area range between (32\*\*2, 64\*\*2). Defaults to None.
- **iou\_thr** (*float*) – IoU threshold to be considered as matched. Defaults to 0.5.
- **ioa\_thr** (*float | None*) – IoA threshold to be considered as matched, which only used in OpenImages evaluation. Defaults to None.
- **dataset** (*list[str] | str | None*) – Dataset name or dataset classes, there are minor differences in metrics for different datasets, e.g. “voc”, “imagenet\_det”, etc. Defaults to None.
- **logger** (*logging.Logger | str | None*) – The way to print the mAP summary. See *mmengine.logging.print\_log()* for details. Defaults to None.
- **tpfp\_fn** (*callable | None*) – The function used to determine true/ false positives. If None, *tpfp\_default()* is used as default unless dataset is ‘det’ or ‘vid’ (*tpfp\_imagenet()* in this case). If it is given as a function, then this function is used to evaluate tp & fp. Default None.
- **nproc** (*int*) – Processes used for computing TP and FP. Defaults to 4.
- **use\_legacy\_coordinate** (*bool*) – Whether to use coordinate system in mmdet v1.x. which means width, height should be calculated as ‘x2 - x1 + 1’ and ‘y2 - y1 + 1’ respectively. Defaults to False.
- **use\_group\_of** (*bool*) – Whether to use group of when calculate TP and FP, which only used in OpenImages evaluation. Defaults to False.
- **eval\_mode** (*str*) – ‘area’ or ‘11points’, ‘area’ means calculating the area under precision-recall curve, ‘11points’ means calculating the average precision of recalls at [0, 0.1, ..., 1], PASCAL VOC2007 uses *11points* as default evaluate mode, while others are ‘area’. Defaults to ‘area’.

**Returns** (mAP, [dict, dict, ...])

**Return type** tuple

```
mmdet.evaluation.functional.eval_recalls(gts, proposals, proposal_nums=None, iou_thrs=0.5,  
                                         logger=None, use_legacy_coordinate=False)
```

Calculate recalls.

**Parameters**

- **gts** (*list[ndarray]*) – a list of arrays of shape (n, 4)
- **proposals** (*list[ndarray]*) – a list of arrays of shape (k, 4) or (k, 5)
- **proposal\_nums** (*int | Sequence[int]*) – Top N proposals to be evaluated.
- **iou\_thrs** (*float | Sequence[float]*) – IoU thresholds. Default: 0.5.
- **logger** (*logging.Logger | str | None*) – The way to print the recall summary. See *mmengine.logging.print\_log()* for details. Default: None.
- **use\_legacy\_coordinate** (*bool*) – Whether use coordinate system in mmdet v1.x. “1” was added to both height and width which means w, h should be computed as ‘x2 - x1 + 1’ and ‘y2 - y1 + 1’. Default: False.

**Returns** recalls of different ious and proposal nums

**Return type** ndarray

`mmdet.evaluation.functional.evaluateImgLists(prediction_list: list, groundtruth_list: list, args: object, backend_args: Optional[dict] = None, dump_matches: bool = False) → dict`

A wrapper of obj: `cityscapesscripts.evaluation`.

`evalInstanceLevelSemanticLabeling.evaluateImgLists`. Support loading groundtruth image from file backend.  
:param prediction\_list: A list of prediction txt file. :type prediction\_list: list :param groundtruth\_list: A list of groundtruth image file. :type groundtruth\_list: list :param args: A global object setting in

obj: `cityscapesscripts.evaluation.evalInstanceLevelSemanticLabeling`

**Parameters**

- **backend\_args** (*dict, optional*) – Arguments to instantiate the prefix of uri corresponding backend. Defaults to None.
- **dump\_matches** (*bool*) – whether dump matches.json. Defaults to False.

**Returns** The computed metric.

**Return type** dict

`mmdet.evaluation.functional.get_classes(dataset) → list`  
Get class names of a dataset.

`mmdet.evaluation.functional.imagenet_det_classes() → list`  
Class names of ImageNet Det.

`mmdet.evaluation.functional.imagenet_vid_classes() → list`  
Class names of ImageNet VID.

`mmdet.evaluation.functional.objects365v1_classes() → list`  
Class names of Objects365 V1.

`mmdet.evaluation.functional.objects365v2_classes() → list`  
Class names of Objects365 V2.

`mmdet.evaluation.functional.oid_challenge_classes() → list`  
Class names of Open Images Challenge.

`mmdet.evaluation.functional.oid_v6_classes() → list`  
Class names of Open Images V6.

`mmdet.evaluation.functional.plot_iou_recall(recalls, iou_thrs)`

Plot IoU-Recalls curve.

**Parameters**

- **recalls** (*ndarray or list*) – shape (k,)
- **iou\_thrs** (*ndarray or list*) – same shape as *recalls*

`mmdet.evaluation.functional.plot_num_recall(recalls, proposal_nums)`

Plot Proposal\_num-Recalls curve.

**Parameters**

- **recalls** (*ndarray or list*) – shape (k,)
- **proposal\_nums** (*ndarray or list*) – same shape as *recalls*

`mmdet.evaluation.functional.pq_compute_multi_core(matched_annotations_list, gt_folder, pred_folder, categories, backend_args=None, nproc=32)`

Evaluate the metrics of Panoptic Segmentation with multithreading.

Same as the function with the same name in *panopticapi*.

**Parameters**

- **matched\_annotations\_list** (*list*) – The matched annotation list. Each element is a tuple of annotations of the same image with the format (gt\_anns, pred\_anns).
- **gt\_folder** (*str*) – The path of the ground truth images.
- **pred\_folder** (*str*) – The path of the prediction images.
- **categories** (*str*) – The categories of the dataset.
- **backend\_args** (*object*) – The file client of the dataset. If None, the backend will be set to *local*.
- **nproc** (*int*) – Number of processes for panoptic quality computing. Defaults to 32. When *nproc* exceeds the number of cpu cores, the number of cpu cores is used.

`mmdet.evaluation.functional.pq_compute_single_core(proc_id, annotation_set, gt_folder, pred_folder, categories, backend_args=None, print_log=False)`

The single core function to evaluate the metric of Panoptic Segmentation.

Same as the function with the same name in *panopticapi*. Only the function to load the images is changed to use the file client.

**Parameters**

- **proc\_id** (*int*) – The id of the mini process.
- **gt\_folder** (*str*) – The path of the ground truth images.
- **pred\_folder** (*str*) – The path of the prediction images.
- **categories** (*str*) – The categories of the dataset.
- **backend\_args** (*object*) – The Backend of the dataset. If None, the backend will be set to *local*.
- **print\_log** (*bool*) – Whether to print the log. Defaults to False.

`mmdet.evaluation.functional.print_map_summary(mean_ap, results, dataset=None, scale_ranges=None, logger=None)`

Print mAP and results of each class.

A table will be printed to show the gts/dets/recall/AP of each class and the mAP.

#### Parameters

- **mean\_ap** (*float*) – Calculated from *eval\_map()*.
- **results** (*list[dict]*) – Calculated from *eval\_map()*.
- **dataset** (*list[str] | str | None*) – Dataset name or dataset classes.
- **scale\_ranges** (*list[tuple] | None*) – Range of scales to be evaluated.
- **logger** (*logging.Logger | str | None*) – The way to print the mAP summary. See *mmengine.logging.print\_log()* for details. Defaults to *None*.

`mmdet.evaluation.functional.print_recall_summary(recalls, proposal_nums, iou_thrs, row_idxs=None, col_idxs=None, logger=None)`

Print recalls in a table.

#### Parameters

- **recalls** (*ndarray*) – calculated from *bbox\_recalls*
- **proposal\_nums** (*ndarray or list*) – top N proposals
- **iou\_thrs** (*ndarray or list*) – iou thresholds
- **row\_idxs** (*ndarray*) – which rows(proposal nums) to print
- **col\_idxs** (*ndarray*) – which cols(iou thresholds) to print
- **logger** (*logging.Logger | str | None*) – The way to print the recall summary. See *mmengine.logging.print\_log()* for details. Default: *None*.

`mmdet.evaluation.functional.voc_classes()` → list  
Class names of PASCAL VOC.

## 12.2 metrics



**MMDet.MODELS**

- 13.1 backbones**
- 13.2 data\_preprocessors**
- 13.3 dense\_heads**
- 13.4 detectors**
- 13.5 layers**
- 13.6 losses**
- 13.7 necks**
- 13.8 roi\_heads**
- 13.9 seg\_heads**
- 13.10 task\_modules**
- 13.11 test\_time\_augs**
- 13.12 utils**



## MMDet.STRUCTURES

### 14.1 structures

`class mmdet.structures.DetDataSample(*, metainfo: Optional[dict] = None, **kwargs)`

A data structure interface of MMDetection. They are used as interfaces between different components.

The attributes in `DetDataSample` are divided into several parts:

- `proposals` (`InstanceData`): Region proposals used in two-stage detectors.
- `gt_instances` (`InstanceData`): Ground truth of instance annotations.
- `pred_instances` (`InstanceData`): Instances of model predictions.
- `ignored_instances` (`InstanceData`): Instances to be ignored during training/testing.
- `gt_panoptic_seg` (`PixelData`): Ground truth of panoptic segmentation.
- `pred_panoptic_seg` (`PixelData`): Prediction of panoptic segmentation.
- `gt_sem_seg` (`PixelData`): Ground truth of semantic segmentation.
- `pred_sem_seg` (`PixelData`): Prediction of semantic segmentation.

#### Examples

```
>>> import torch
>>> import numpy as np
>>> from mmengine.structures import InstanceData
>>> from mmdet.structures import DetDataSample
```

```
>>> data_sample = DetDataSample()
>>> img_meta = dict(img_shape=(800, 1196),
...                 pad_shape=(800, 1216))
>>> gt_instances = InstanceData(metainfo=img_meta)
>>> gt_instances.bboxes = torch.rand((5, 4))
>>> gt_instances.labels = torch.rand((5,))
>>> data_sample.gt_instances = gt_instances
>>> assert 'img_shape' in data_sample.gt_instances.metainfo_keys()
>>> len(data_sample.gt_instances)
5
>>> print(data_sample)
```

```
<DetDataSample(
```

## META INFORMATION

DATA FIELDS gt\_instances: &lt;InstanceData(

META INFORMATION pad\_shape: (800, 1216) img\_shape: (800, 1196)

DATA FIELDS labels: tensor([0.8533, 0.1550, 0.5433, 0.7294, 0.5098])

bboxes: tensor([[9.7725e-01, 5.8417e-01, 1.7269e-01, 6.5694e-01],  
 [1.7894e-01, 5.1780e-01, 7.0590e-01, 4.8589e-01], [7.0392e-01,  
 6.6770e-01, 1.7520e-01, 1.4267e-01], [2.2411e-01, 5.1962e-01,  
 9.6953e-01, 6.6994e-01], [4.1338e-01, 2.1165e-01, 2.7239e-04,  
 6.8477e-01]])

) at 0x7f21fb1b9190&gt;

) at 0x7f21fb1b9880&gt;

```
>>> pred_instances = InstanceData(metainfo=img_meta)
>>> pred_instances.bboxes = torch.rand((5, 4))
>>> pred_instances.scores = torch.rand((5,))
>>> data_sample = DetDataSample(pred_instances=pred_instances)
>>> assert 'pred_instances' in data_sample
```

```
>>> data_sample = DetDataSample()
>>> gt_instances_data = dict(
...     bboxes=torch.rand(2, 4),
...     labels=torch.rand(2),
...     masks=np.random.rand(2, 2, 2))
>>> gt_instances = InstanceData(**gt_instances_data)
>>> data_sample.gt_instances = gt_instances
>>> assert 'gt_instances' in data_sample
>>> assert 'masks' in data_sample.gt_instances
```

```
>>> data_sample = DetDataSample()
>>> gt_panoptic_seg_data = dict(panoptic_seg=torch.rand(2, 4))
>>> gt_panoptic_seg = PixelData(**gt_panoptic_seg_data)
>>> data_sample.gt_panoptic_seg = gt_panoptic_seg
>>> print(data_sample)
```

&lt;DetDataSample(

META INFORMATION

DATA FIELDS \_gt\_panoptic\_seg: &lt;BaseDataElement(

META INFORMATION

DATA FIELDS panoptic\_seg: tensor([[0.7586, 0.1262, 0.2892, 0.9341],  
 [0.3200, 0.7448, 0.1052, 0.5371]])

) at 0x7f66c2bb7730&gt;

gt\_panoptic\_seg: &lt;BaseDataElement(

META INFORMATION

DATA FIELDS panoptic\_seg: tensor([[0.7586, 0.1262, 0.2892, 0.9341],  
 [0.3200, 0.7448, 0.1052, 0.5371]])

```
) at 0x7f66c2bb7730>
) at 0x7f66c2bb7280> >>> data_sample = DetDataSample() >>> gt_segmask_data =
dict(segmask=torch.rand(2, 2, 2)) >>> gt_segmask = PixelData(**gt_segmask_data) >>>
data_sample.gt_segmask = gt_segmask >>> assert 'gt_segmask' in data_sample >>> assert
'segmask' in data_sample.gt_segmask
```

## 14.2 bbox

## 14.3 mask



**MMDET.TESTING**



## **MMDET.VISUALIZATION**



## MMDet.UTILS

**class** `mmdet.utils.AvoidOOM`(*to\_cpu=True, test=False*)

Try to convert inputs to FP16 and CPU if got a PyTorch's CUDA Out of Memory error. It will do the following steps:

1. First retry after calling `torch.cuda.empty_cache()`.
2. If that still fails, it will then retry by converting inputs to FP16.
3. If that still fails trying to convert inputs to CPUs.

In this case, it expects the function to dispatch to CPU implementation.

### Parameters

- **to\_cpu** (*bool*) – Whether to convert outputs to CPU if get an OOM error. This will slow down the code significantly. Defaults to True.
- **test** (*bool*) – Skip `_ignore_torch_cuda_oom` operate that can use lightweight data in unit test, only used in test unit. Defaults to False.

### Examples

```
>>> from mmdet.utils.memory import AvoidOOM
>>> AvoidCUDAOOM = AvoidOOM()
>>> output = AvoidOOM.retry_if_cuda_oom(
>>>     some_torch_function)(input1, input2)
>>> # To use as a decorator
>>> # from mmdet.utils import AvoidCUDAOOM
>>> @AvoidCUDAOOM.retry_if_cuda_oom
>>> def function(*args, **kwargs):
>>>     return None
```

...

---

### Note:

1. The output may be on CPU even if inputs are on GPU. Processing on CPU will slow down the code significantly.
2. When converting inputs to CPU, it will only look at each argument and check if it has `.device` and `.to` for conversion. Nested structures of tensors are not supported.

3. Since the function might be called more than once, it has to be stateless.

---

#### **retry\_if\_cuda\_oom**(*func*)

Makes a function retry itself after encountering pytorch's CUDA OOM error.

The implementation logic is referred to <https://github.com/facebookresearch/detectron2/blob/main/detectron2/utils/memory.py>

**Parameters** *func* – a stateless callable that takes tensor-like objects as arguments.

**Returns** a callable which retries *func* if OOM is encountered.

**Return type** *func*

`mmdet.utils.all_reduce_dict(py_dict, op='sum', group=None, to_float=True)`

Apply all reduce function for python dict object.

The code is modified from [https://github.com/Megvii-BaseDetection/YOLOX/blob/main/yolox/utils/allreduce\\_norm.py](https://github.com/Megvii-BaseDetection/YOLOX/blob/main/yolox/utils/allreduce_norm.py).

NOTE: make sure that *py\_dict* in different ranks has the same keys and the values should be in the same shape. Currently only supports nccl backend.

#### **Parameters**

- **py\_dict** (*dict*) – Dict to be applied all reduce op.
- **op** (*str*) – Operator, could be 'sum' or 'mean'. Default: 'sum'
- **group** (`torch.distributed.group`, optional) – Distributed group, Default: None.
- **to\_float** (*bool*) – Whether to convert all values of dict to float. Default: True.

**Returns** reduced python dict object.

**Return type** `OrderedDict`

`mmdet.utils.allreduce_grads(params, coalesce=True, bucket_size_mb=-1)`

Allreduce gradients.

#### **Parameters**

- **params** (`list[torch.Parameters]`) – List of parameters of a model
- **coalesce** (*bool*, optional) – Whether allreduce parameters as a whole. Defaults to True.
- **bucket\_size\_mb** (*int*, optional) – Size of bucket, the unit is MB. Defaults to -1.

`mmdet.utils.collect_env()`

Collect the information of the running environments.

`mmdet.utils.compat_cfg(cfg)`

This function would modify some filed to keep the compatibility of config.

For example, it will move some args which will be deprecated to the correct fields.

`mmdet.utils.find_latest_checkpoint(path, suffix='pth')`

Find the latest checkpoint from the working directory.

#### **Parameters**

- **path** (*str*) – The path to find checkpoints.
- **suffix** (*str*) – File extension. Defaults to pth.

**Returns** File path of the latest checkpoint.

**Return type** `latest_path(str | None)`

## References

`mmdet.utils.get_caller_name()`

Get name of caller method.

`mmdet.utils.get_test_pipeline_cfg(cfg: Union[str, mmengine.config.config.ConfigDict]) → mmengine.config.config.ConfigDict`

Get the test dataset pipeline from entire config.

**Parameters** `cfg` (str or ConfigDict) – the entire config. Can be a config file or a ConfigDict.

**Returns** the config of test dataset.

**Return type** ConfigDict

`mmdet.utils.log_img_scale(img_scale, shape_order='hw', skip_square=False)`

Log image size.

**Parameters**

- **img\_scale** (tuple) – Image size to be logged.
- **shape\_order** (str, optional) – The order of image shape. ‘hw’ for (height, width) and ‘wh’ for (width, height). Defaults to ‘hw’.
- **skip\_square** (bool, optional) – Whether to skip logging for square img\_scale. Defaults to False.

**Returns** Whether to have done logging.

**Return type** bool

`mmdet.utils.reduce_mean(tensor)`

“Obtain the mean of tensor on different GPUs.

`mmdet.utils.register_all_modules(init_default_scope: bool = True) → None`

Register all modules in mmdet into the registries.

**Parameters** `init_default_scope` (bool) – Whether initialize the mmdet default scope. When `init_default_scope=True`, the global default scope will be set to `mmdet`, and all registries will build modules from mmdet’s registry node. To understand more about the registry, please refer to <https://github.com/open-mmlab/mengine/blob/main/docs/en/tutorials/registry.md> Defaults to True.

`mmdet.utils.replace_cfg_vals(ori_cfg)`

Replace the string “\${key}” with the corresponding value.

Replace the “\${key}” with the value of `ori_cfg.key` in the config. And support replacing the chained \${key}. Such as, replace “\${key0.key1}” with the value of `cfg.key0.key1`. Code is modified from ``vars.py`` < <https://github.com/microsoft/SoftTeacher/blob/main/ssod/utils/vars.py> >`\_ # noqa: E501

**Parameters** `ori_cfg` (mmengine.config.Config) – The origin config with “\${key}” generated from a file.

**Returns** The config with “\${key}” replaced by the corresponding value.

**Return type** updated\_cfg [mmengine.config.Config]

`mmdet.utils.setup_cache_size_limit_of_dynamo()`

Setup cache size limit of dynamo.

Note: Due to the dynamic shape of the loss calculation and post-processing parts in the object detection algorithm, these functions must be compiled every time they are run. Setting a large value for

`torch._dynamo.config.cache_size_limit` may result in repeated compilation, which can slow down training and testing speed. Therefore, we need to set the default value of `cache_size_limit` smaller. An empirical value is 4.

`mmdet.utils.setup_multi_processes(cfg)`

Setup multi-processing environment variables.

`mmdet.utils.split_batch(img, img metas, kwargs)`

Split data\_batch by tags.

Code is modified from <[https://github.com/microsoft/SoftTeacher/blob/main/ssod/utils/structure\\_utils.py](https://github.com/microsoft/SoftTeacher/blob/main/ssod/utils/structure_utils.py)> # noqa: E501

#### Parameters

- **img** (*Tensor*) – of shape (N, C, H, W) encoding input images. Typically these should be mean centered and std scaled.
- **img\_metas** (*list[dict]*) – List of image info dict where each dict has: ‘img\_shape’, ‘scale\_factor’, ‘flip’, and may also contain ‘filename’, ‘ori\_shape’, ‘pad\_shape’, and ‘img\_norm\_cfg’. For details on the values of these keys, see `mmdet.datasets.pipelines.Collect`.
- **kwargs** (*dict*) – Specific to concrete implementation.

#### Returns

a dict that data\_batch splited by tags, such as ‘sup’, ‘unsup\_teacher’, and ‘unsup\_student’.

**Return type** data\_groups (dict)

`mmdet.utils.sync_random_seed(seed=None, device='cuda')`

Make sure different ranks share the same seed.

All workers must call this function, otherwise it will deadlock. This method is generally used in *Distributed-Sampler*, because the seed should be identical across all processes in the distributed group.

In distributed sampling, different ranks should sample non-overlapped data in the dataset. Therefore, this function is used to make sure that each rank shuffles the data indices in the same order based on the same seed. Then different ranks could use different indices to select non-overlapped data from the same data list.

#### Parameters

- **seed** (*int*, *Optional*) – The seed. Default to None.
- **device** (*str*) – The device where the seed will be put on. Default to ‘cuda’.

**Returns** Seed to be used.

**Return type** int

`mmdet.utils.update_data_root(cfg, logger=None)`

Update data root according to env MMDET\_DATASETS.

If set env MMDET\_DATASETS, update `cfg.data_root` according to MMDET\_DATASETS. Otherwise, using `cfg.data_root` as default.

#### Parameters

- **cfg** (*Config*) – The model config need to modify
- **logger** (*logging.Logger* | *str* | *None*) – the way to print msg

## BENCHMARK AND MODEL ZOO

### 18.1 Mirror sites

We only use aliyun to maintain the model zoo since MMDetection V2.0. The model zoo of V1.x has been deprecated.

### 18.2 Common settings

- All models were trained on `coco_2017_train`, and tested on the `coco_2017_val`.
- We use distributed training.
- All pytorch-style pretrained backbones on ImageNet are from PyTorch model zoo, caffe-style pretrained backbones are converted from the newly released model from detectron2.
- For fair comparison with other codebases, we report the GPU memory as the maximum value of `torch.cuda.max_memory_allocated()` for all 8 GPUs. Note that this value is usually less than what `nvidia-smi` shows.
- We report the inference time as the total time of network forwarding and post-processing, excluding the data loading time. Results are obtained with the script `benchmark.py` which computes the average time on 2000 images.

### 18.3 ImageNet Pretrained Models

It is common to initialize from backbone models pre-trained on ImageNet classification task. All pre-trained model links can be found at [open\\_mmlab](#). According to `img_norm_cfg` and source of weight, we can divide all the ImageNet pre-trained model weights into some cases:

- TorchVision: Corresponding to torchvision weight, including ResNet50, ResNet101. The `img_norm_cfg` is `dict(mean=[123.675, 116.28, 103.53], std=[58.395, 57.12, 57.375], to_rgb=True)`.
- Pycls: Corresponding to `pycls` weight, including RegNetX. The `img_norm_cfg` is `dict(mean=[103.530, 116.280, 123.675], std=[57.375, 57.12, 58.395], to_rgb=False)`.
- MSRA styles: Corresponding to `MSRA` weights, including ResNet50\_Caffe and ResNet101\_Caffe. The `img_norm_cfg` is `dict(mean=[103.530, 116.280, 123.675], std=[1.0, 1.0, 1.0], to_rgb=False)`.
- Caffe2 styles: Currently only contains ResNext101\_32x8d. The `img_norm_cfg` is `dict(mean=[103.530, 116.280, 123.675], std=[57.375, 57.120, 58.395], to_rgb=False)`.

- Other styles: E.g SSD which corresponds to `img_norm_cfg` is `dict(mean=[123.675, 116.28, 103.53], std=[1, 1, 1], to_rgb=True)` and YOLOv3 which corresponds to `img_norm_cfg` is `dict(mean=[0, 0, 0], std=[255., 255., 255.], to_rgb=True)`.

The detailed table of the commonly used backbone models in MMDetection is listed below :

## 18.4 Baselines

### 18.4.1 RPN

Please refer to [RPN](#) for details.

### 18.4.2 Faster R-CNN

Please refer to [Faster R-CNN](#) for details.

### 18.4.3 Mask R-CNN

Please refer to [Mask R-CNN](#) for details.

### 18.4.4 Fast R-CNN (with pre-computed proposals)

Please refer to [Fast R-CNN](#) for details.

### 18.4.5 RetinaNet

Please refer to [RetinaNet](#) for details.

### 18.4.6 Cascade R-CNN and Cascade Mask R-CNN

Please refer to [Cascade R-CNN](#) for details.

### 18.4.7 Hybrid Task Cascade (HTC)

Please refer to [HTC](#) for details.

### 18.4.8 SSD

Please refer to [SSD](#) for details.

### 18.4.9 Group Normalization (GN)

Please refer to [Group Normalization](#) for details.

### 18.4.10 Weight Standardization

Please refer to [Weight Standardization](#) for details.

### 18.4.11 Deformable Convolution v2

Please refer to [Deformable Convolutional Networks](#) for details.

### 18.4.12 CARAFE: Content-Aware ReAssembly of FEatures

Please refer to [CARAFE](#) for details.

### 18.4.13 Instaboost

Please refer to [Instaboost](#) for details.

### 18.4.14 Libra R-CNN

Please refer to [Libra R-CNN](#) for details.

### 18.4.15 Guided Anchoring

Please refer to [Guided Anchoring](#) for details.

### 18.4.16 FCOS

Please refer to [FCOS](#) for details.

### 18.4.17 FoveaBox

Please refer to [FoveaBox](#) for details.

### 18.4.18 RepPoints

Please refer to [RepPoints](#) for details.

#### 18.4.19 FreeAnchor

Please refer to [FreeAnchor](#) for details.

#### 18.4.20 Grid R-CNN (plus)

Please refer to [Grid R-CNN](#) for details.

#### 18.4.21 GHM

Please refer to [GHM](#) for details.

#### 18.4.22 GCNet

Please refer to [GCNet](#) for details.

#### 18.4.23 HRNet

Please refer to [HRNet](#) for details.

#### 18.4.24 Mask Scoring R-CNN

Please refer to [Mask Scoring R-CNN](#) for details.

#### 18.4.25 Train from Scratch

Please refer to [Rethinking ImageNet Pre-training](#) for details.

#### 18.4.26 NAS-FPN

Please refer to [NAS-FPN](#) for details.

#### 18.4.27 ATSS

Please refer to [ATSS](#) for details.

#### 18.4.28 FSAF

Please refer to [FSAF](#) for details.

### 18.4.29 RegNetX

Please refer to [RegNet](#) for details.

### 18.4.30 Res2Net

Please refer to [Res2Net](#) for details.

### 18.4.31 GRoIE

Please refer to [GRoIE](#) for details.

### 18.4.32 Dynamic R-CNN

Please refer to [Dynamic R-CNN](#) for details.

### 18.4.33 PointRend

Please refer to [PointRend](#) for details.

### 18.4.34 DetectoRS

Please refer to [DetectoRS](#) for details.

### 18.4.35 Generalized Focal Loss

Please refer to [Generalized Focal Loss](#) for details.

### 18.4.36 CornerNet

Please refer to [CornerNet](#) for details.

### 18.4.37 YOLOv3

Please refer to [YOLOv3](#) for details.

### 18.4.38 PAA

Please refer to [PAA](#) for details.

### 18.4.39 SABL

Please refer to [SABL](#) for details.

### 18.4.40 CentripetalNet

Please refer to [CentripetalNet](#) for details.

### 18.4.41 ResNeSt

Please refer to [ResNeSt](#) for details.

### 18.4.42 DETR

Please refer to [DETR](#) for details.

### 18.4.43 Deformable DETR

Please refer to [Deformable DETR](#) for details.

### 18.4.44 AutoAssign

Please refer to [AutoAssign](#) for details.

### 18.4.45 YOLOF

Please refer to [YOLOF](#) for details.

### 18.4.46 Seesaw Loss

Please refer to [Seesaw Loss](#) for details.

### 18.4.47 CenterNet

Please refer to [CenterNet](#) for details.

### 18.4.48 YOLOX

Please refer to [YOLOX](#) for details.

#### 18.4.49 PVT

Please refer to [PVT](#) for details.

#### 18.4.50 SOLO

Please refer to [SOLO](#) for details.

#### 18.4.51 QueryInst

Please refer to [QueryInst](#) for details.

#### 18.4.52 PanopticFPN

Please refer to [PanopticFPN](#) for details.

#### 18.4.53 MaskFormer

Please refer to [MaskFormer](#) for details.

#### 18.4.54 DyHead

Please refer to [DyHead](#) for details.

#### 18.4.55 Mask2Former

Please refer to [Mask2Former](#) for details.

#### 18.4.56 Efficientnet

Please refer to [Efficientnet](#) for details.

#### 18.4.57 Other datasets

We also benchmark some methods on [PASCAL VOC](#), [Cityscapes](#), [OpenImages](#) and [WIDER FACE](#).

#### 18.4.58 Pre-trained Models

We also train [Faster R-CNN](#) and [Mask R-CNN](#) using ResNet-50 and [RegNetX-3.2G](#) with multi-scale training and longer schedules. These models serve as strong pre-trained models for downstream tasks for convenience.

## 18.5 Speed benchmark

### 18.5.1 Training Speed benchmark

We provide `analyze_logs.py` to get average time of iteration in training. You can find examples in [Log Analysis](#).

We compare the training speed of Mask R-CNN with some other popular frameworks (The data is copied from [detectron2](#)). For mmdetection, we benchmark with `mask-rcnn_r50-caffe_fpn_poly-1x_coco_v1.py`, which should have the same setting with `mask_rcnn_R_50_FPN_noaug_1x.yaml` of detectron2. We also provide the [checkpoint](#) and [training log](#) for reference. The throughput is computed as the average throughput in iterations 100-500 to skip GPU warmup time.

### 18.5.2 Inference Speed Benchmark

We provide `benchmark.py` to benchmark the inference latency. The script benchmarks the model with 2000 images and calculates the average time ignoring first 5 times. You can change the output log interval (defaults: 50) by setting `LOG-INTERVAL`.

```
python tools/benchmark.py ${CONFIG} ${CHECKPOINT} [--log-interval ${LOG-INTERVAL}] [--  
↪fuse-conv-bn]
```

The latency of all models in our model zoo is benchmarked without setting `fuse-conv-bn`, you can get a lower latency by setting it.

## 18.6 Comparison with Detectron2

We compare mmdetection with [Detectron2](#) in terms of speed and performance. We use the commit id `185c27e(30/4/2020)` of detectron. For fair comparison, we install and run both frameworks on the same machine.

### 18.6.1 Hardware

- 8 NVIDIA Tesla V100 (32G) GPUs
- Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz

### 18.6.2 Software environment

- Python 3.7
- PyTorch 1.4
- CUDA 10.1
- CUDNN 7.6.03
- NCCL 2.4.08

### 18.6.3 Performance

### 18.6.4 Training Speed

The training speed is measure with s/iter. The lower, the better.

### 18.6.5 Inference Speed

The inference speed is measured with fps (img/s) on a single GPU, the higher, the better. To be consistent with Detectron2, we report the pure inference speed (without the time of data loading). For Mask R-CNN, we exclude the time of RLE encoding in post-processing. We also include the officially reported speed in the parentheses, which is slightly higher than the results tested on our server due to differences of hardwares.

### 18.6.6 Training memory



---

CHAPTER  
**NINETEEN**

---

**CONTRIBUTION**



## PROJECTS BASED ON MMDetection

There are many projects built upon MMDetection. We list some of them as examples of how to extend MMDetection for your own projects. As the page might not be completed, please feel free to create a PR to update this page.

### 20.1 Projects as an extension

Some projects extend the boundary of MMDetection for deployment or other research fields. They reveal the potential of what MMDetection can do. We list several of them as below.

- **OTEDetection**: OpenVINO training extensions for object detection.
- **MMDetection3d**: OpenMMLab's next-generation platform for general 3D object detection.

### 20.2 Projects of papers

There are also projects released with papers. Some of the papers are published in top-tier conferences (CVPR, ICCV, and ECCV), the others are also highly influential. To make this list also a reference for the community to develop and compare new object detection algorithms, we list them following the time order of top-tier conferences. Methods already supported and maintained by MMDetection are not listed.

- Involution: Inverting the Inherence of Convolution for Visual Recognition, CVPR21. [\[paper\]](#)[\[github\]](#)
- Multiple Instance Active Learning for Object Detection, CVPR 2021. [\[paper\]](#)[\[github\]](#)
- Adaptive Class Suppression Loss for Long-Tail Object Detection, CVPR 2021. [\[paper\]](#)[\[github\]](#)
- Generalizable Pedestrian Detection: The Elephant In The Room, CVPR2021. [\[paper\]](#)[\[github\]](#)
- Group Fisher Pruning for Practical Network Compression, ICML2021. [\[paper\]](#)[\[github\]](#)
- Overcoming Classifier Imbalance for Long-tail Object Detection with Balanced Group Softmax, CVPR2020. [\[paper\]](#)[\[github\]](#)
- Coherent Reconstruction of Multiple Humans from a Single Image, CVPR2020. [\[paper\]](#)[\[github\]](#)
- Look-into-Object: Self-supervised Structure Modeling for Object Recognition, CVPR 2020. [\[paper\]](#)[\[github\]](#)
- Video Panoptic Segmentation, CVPR2020. [\[paper\]](#)[\[github\]](#)
- D2Det: Towards High Quality Object Detection and Instance Segmentation, CVPR2020. [\[paper\]](#)[\[github\]](#)
- CentripetalNet: Pursuing High-quality Keypoint Pairs for Object Detection, CVPR2020. [\[paper\]](#)[\[github\]](#)
- Learning a Unified Sample Weighting Network for Object Detection, CVPR 2020. [\[paper\]](#)[\[github\]](#)
- Scale-equalizing Pyramid Convolution for Object Detection, CVPR2020. [\[paper\]](#)[\[github\]](#)

- Revisiting the Sibling Head in Object Detector, CVPR2020. [\[paper\]](#)[\[github\]](#)
- PolarMask: Single Shot Instance Segmentation with Polar Representation, CVPR2020. [\[paper\]](#)[\[github\]](#)
- Hit-Detector: Hierarchical Trinity Architecture Search for Object Detection, CVPR2020. [\[paper\]](#)[\[github\]](#)
- ZeroQ: A Novel Zero Shot Quantization Framework, CVPR2020. [\[paper\]](#)[\[github\]](#)
- CBNet: A Novel Composite Backbone Network Architecture for Object Detection, AAAI2020. [\[paper\]](#)[\[github\]](#)
- RDSNet: A New Deep Architecture for Reciprocal Object Detection and Instance Segmentation, AAAI2020. [\[paper\]](#)[\[github\]](#)
- Training-Time-Friendly Network for Real-Time Object Detection, AAAI2020. [\[paper\]](#)[\[github\]](#)
- Cascade RPN: Delving into High-Quality Region Proposal Network with Adaptive Convolution, NeurIPS 2019. [\[paper\]](#)[\[github\]](#)
- Reasoning R-CNN: Unifying Adaptive Global Reasoning into Large-scale Object Detection, CVPR2019. [\[paper\]](#)[\[github\]](#)
- Learning RoI Transformer for Oriented Object Detection in Aerial Images, CVPR2019. [\[paper\]](#)[\[github\]](#)
- SOLO: Segmenting Objects by Locations. [\[paper\]](#)[\[github\]](#)
- SOLOv2: Dynamic, Faster and Stronger. [\[paper\]](#)[\[github\]](#)
- Dense Peppoints: Representing Visual Objects with Dense Point Sets. [\[paper\]](#)[\[github\]](#)
- IterDet: Iterative Scheme for Object Detection in Crowded Environments. [\[paper\]](#)[\[github\]](#)
- Cross-Iteration Batch Normalization. [\[paper\]](#)[\[github\]](#)
- A Ranking-based, Balanced Loss Function Unifying Classification and Localisation in Object Detection, NeurIPS2020 [\[paper\]](#)[\[github\]](#)
- RelationNet++: Bridging Visual Representations for Object Detection via Transformer Decoder, NeurIPS2020 [\[paper\]](#)[\[github\]](#)
- Generalized Focal Loss V2: Learning Reliable Localization Quality Estimation for Dense Object Detection, CVPR2021[\[paper\]](#)[\[github\]](#)
- Swin Transformer: Hierarchical Vision Transformer using Shifted Windows, ICCV2021[\[paper\]](#)[\[github\]](#)
- Focal Transformer: Focal Self-attention for Local-Global Interactions in Vision Transformers, NeurIPS2021[\[paper\]](#)[\[github\]](#)
- End-to-End Semi-Supervised Object Detection with Soft Teacher, ICCV2021[\[paper\]](#)[\[github\]](#)
- CBNetV2: A Novel Composite Backbone Network Architecture for Object Detection [\[paper\]](#)[\[github\]](#)
- Instances as Queries, ICCV2021 [\[paper\]](#)[\[github\]](#)

## CHANGELOG OF V3.X

### 21.1 v3.0.0 (6/4/2023)

#### 21.1.1 Highlights

- Support Semi-automatic annotation Base Label-Studio (#10039)
- Support EfficientDet in projects (#9810)

#### 21.1.2 New Features

- File I/O migration and reconstruction (#9709)
- Release DINO Swin-L 36e model (#9927)

#### 21.1.3 Bug Fixes

- Fix benchmark script (#9865)
- Fix the crop method of PolygonMasks (#9858)
- Fix Albu augmentation with the mask shape (#9918)
- Fix RTMDetIns prior generator device error (#9964)
- Fix `img_shape` in data pipeline (#9966)
- Fix cityscapes import error (#9984)
- Fix `solov2_r50_fpn_ms-3x_coco.py` config error (#10030)
- Fix Conditional DETR AP and Log (#9889)
- Fix accepting an unexpected argument `local-rank` in PyTorch 2.0 (#10050)
- Fix `common/ms_3x_coco-instance.py` config error (#10056)
- Fix compute flops error (#10051)
- Delete `data_root` in `CocoOccludedSeparatedMetric` to fix bug (#9969)
- Unifying metafile.yml (#9849)

### 21.1.4 Improvements

- Added BoxInst r101 config (#9967)
- Added config migration guide (#9960)
- Added more social networking links (#10021)
- Added RTMDet config introduce (#10042)
- Added visualization docs (#9938, #10058)
- Refined data\_prepare docs (#9935)
- Added support for setting the cache\_size\_limit parameter of dynamo in PyTorch 2.0 (#10054)
- Updated coco\_metric.py (#10033)
- Update type hint (#10040)

### 21.1.5 Contributors

A total of 19 developers contributed to this release.

Thanks @IRONICBo, @vansin, @RangeKing, @Ghlerrix, @okotaku, @JosonChan1998, @zgzhengSE, @bobo0810, @yechenzh, @Zheng-LinXiao, @LYMDLUT, @yarkable, @xiejiajiannb, @chhluo, @BIGWangYuDong, @RangiLy, @zwhus, @hhaAndroid, @ZwwWayne

## 21.2 v3.0.0rc6 (24/2/2023)

### 21.2.1 Highlights

- Support Boxinst, Objects365 Dataset, and Separated and Occluded COCO metric
- Support ConvNeXt-V2, DiffusionDet, and inference of EfficientDet and Detic in Projects
- Refactor DETR series and support Conditional-DETR, DAB-DETR, and DINO
- Support DetInferencer for inference, Test Time Augmentation, and automatically importing modules from registry
- Support RTMDet-Ins ONNXRuntime and TensorRT deployment
- Support calculating FLOPs of detectors

### 21.2.2 New Features

- Support [Boxinst](#) (#9525)
- Support [Objects365 Dataset](#) (#9600)
- Support [ConvNeXt-V2](#) in Projects (#9619)
- Support [DiffusionDet](#) in Projects (#9639, #9768)
- Support [Detic](#) inference in Projects (#9645)
- Support [EfficientDet](#) inference in Projects (#9645)
- Support [Separated and Occluded COCO metric](#) (#9710)

- Support auto import modules from registry (#9143)
- Refactor DETR series and support Conditional-DETR, DAB-DETR and DINO (#9646)
- Support DetInferencer for inference (#9561)
- Support Test Time Augmentation (#9452)
- Support calculating FLOPs of detectors (#9777)

### 21.2.3 Bug Fixes

- Fix deprecating old type alias due to new version of numpy (#9625, #9537)
- Fix VOC metrics (#9784)
- Fix the wrong link of RTMDet-x log (#9549)
- Fix RTMDet link in README (#9575)
- Fix MMDet get flops error (#9589)
- Fix use\_depthwise in RTMDet (#9624)
- Fix albumentations augmentation post process with masks (#9551)
- Fix DETR series Unit Test (#9647)
- Fix LoadPanopticAnnotations bug (#9703)
- Fix isort CI (#9680)
- Fix amp pooling overflow (#9670)
- Fix docstring about noise in DINO (#9747)
- Fix potential bug in MultiImageMixDataset (#9764)

### 21.2.4 Improvements

- Replace NumPy transpose with PyTorch permute to speed-up (#9762)
- Deprecate sklearn (#9725)
- Add RTMDet-Ins deployment guide (#9823)
- Update RTMDet config and README (#9603)
- Replace the models used in the tutorial document with RTMDet (#9843)
- Adjust the minimum supported python version to 3.7 (#9602)
- Support modifying palette through configuration (#9445)
- Update README document in Project (#9599)
- Replace github with gitee in .pre-commit-config-zh-cn.yaml file (#9586)
- Use official isort in .pre-commit-config.yaml file (#9701)
- Change MMCV minimum version to 2.0.0rc4 for dev-3.x (#9695)
- Add Chinese version of single\_stage\_as\_rpn.md and test\_results\_submission.md (#9434)
- Add OpenDataLab download link (#9605, #9738)
- Add type hints of several layers (#9346)

- Add typehint for DarknetBottleneck (#9591)
- Add dockerfile (#9659)
- Add twitter, discord, medium, and youtube link (#9775)
- Prepare for merging refactor-detr (#9656)
- Add metafile to ConditionalDETR, DABDETR and DINO (#9715)
- Support to modify `non_blocking` parameters (#9723)
- Comment repeater visualizer register (#9740)
- Update user guide: `finetune.md` and `inference.md` (#9578)

### 21.2.5 New Contributors

- @NoFish-528 made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9346>
- @137208 made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9434>
- @lyviva made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9625>
- @zwhus made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9589>
- @zylo117 made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9670>
- @chg0901 made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9740>
- @DanShouzhu made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9578>

### 21.2.6 Contributors

A total of 27 developers contributed to this release.

Thanks @JosonChan1998, @RangeKing, @NoFish-528, @likyoo, @Xiangxu-0103, @137208, @PeterH0323, @tianleiSHI, @wufan-tb, @lyviva, @zwhus, @jshilong, @Li-Qingyun, @sanbuphy, @zylo117, @triple-Mu, @Ke-iChiTse, @LYMDLUT, @nijkah, @chg0901, @DanShouzhu, @zytx121, @vansin, @BIGWangYuDong, @hhaAndroid, @RangiLyu, @ZwwWayne

## 21.3 v3.0.0rc5 (26/12/2022)

### 21.3.1 Highlights

- Support **RTMDet** instance segmentation models. The technical report of RTMDet is on [arxiv](#)
- Support SSHContextModule in paper [SSH: Single Stage Headless Face Detector](#).

### 21.3.2 New Features

- Support [RTMDet](#) instance segmentation models and improve RTMDet test config (#9494)
- Support SSHContextModule in paper [SSH: Single Stage Headless Face Detector](#) (#8953)
- Release [CondInst](#) pre-trained model (#9406)

### 21.3.3 Bug Fixes

- Fix CondInst predict error when `batch_size` is greater than 1 in inference (#9400)
- Fix the bug of visualization when the dtype of the pipeline output image is not uint8 in browse dataset (#9401)
- Fix `analyze_logs.py` to plot mAP and calculate train time correctly (#9409)
- Fix backward inplace error with PAFPN (#9450)
- Fix config import links in model converters (#9441)
- Fix DeformableDETRHead object has no attribute `loss_single` (#9477)
- Fix the logic of pseudo bboxes predicted by teacher model in SemiBaseDetector (#9414)
- Fix demo API in instance segmentation tutorial (#9226)
- Fix `analyze_results` (#9380)
- Fix the error that Readthedocs API cannot be displayed (#9510)
- Fix the error when there are no prediction results and support visualize the groundtruth of TTA (#9840)

### 21.3.4 Improvements

- Remove legacy `builder.py` (#9479)
- Make sure the pipeline argument shape is in (`width`, `height`) order (#9324)
- Add `.pre-commit-config-zh-cn.yaml` file (#9388)
- Refactor dataset meta info to lowercase (#9469)
- Add PyTorch 1.13 checking in CI (#9478)
- Adjust FocalLoss and QualityFocalLoss to allow different kinds of targets (#9481)
- Refactor `setup.cfg` (#9370)
- Clip saturation value to valid range `[0, 1]` (#9391)
- Only keep meta and `state_dict` when publishing model (#9356)
- Add segm evaluator in `ms-poly_3x_coco_instance` config (#9524)
- Update deployment guide (#9527)
- Update `zh_cn_faq.md` (#9396)
- Update `get_started` (#9480)
- Update the `zh_cn` user guides of `useful_tools.md` and `useful_hooks.md` (#9453)
- Add type hints for `bfp` and `channel_mapper` (#9410)
- Add type hints of several losses (#9397)

- Add type hints and update docstring for task modules (#9468)

### 21.3.5 New Contributors

- @lihua199710 made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9388>
- @twmht made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9450>
- @tianleiSHI made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9453>
- @kitecats made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9481>
- @QJC123654 made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9468>

### 21.3.6 Contributors

A total of 20 developers contributed to this release.

Thanks @liuyanyi, @RangeKing, @lihua199710, @MambaWong, @sanbuphy, @Xiangxu-0103, @twmht, @Jun-yaoHu, @Chan-Sun, @tianleiSHI, @zytx121, @kitecats, @QJC123654, @JosonChan1998, @lvhan028, @Czm369, @BIGWangYuDong, @RangiLyu, @hhaAndroid, @ZwwWayne

## 21.4 v3.0.0rc4 (23/11/2022)

### 21.4.1 Highlights

- Support `CondInst`
- Add `projects/` folder, which will be a place for some experimental models/features.
- Support `SparseInst` in projects

### 21.4.2 New Features

- Support `CondInst` (#9223)
- Add `projects/` folder, which will be a place for some experimental models/features (#9341)
- Support `SparseInst` in projects (#9377)

### 21.4.3 Bug Fixes

- Fix `pixel_decoder_type` discrimination in MaskFormer Head. (#9176)
- Fix wrong padding value in cached MixUp (#9259)
- Rename `utils/typing.py` to `utils/typing_utils.py` to fix `collect_env` error (#9265)
- Fix resume arg conflict (#9287)
- Fix the configs of Faster R-CNN with caffe backbone (#9319)
- Fix torchserve and update related documentation (#9343)
- Fix bbox refine bug with sigmoid activation (#9538)

### 21.4.4 Improvements

- Update the docs of GIoU Loss in README (#8810)
- Handle dataset wrapper in `inference_detector` (#9144)
- Update the type of counts in COCO's compressed RLE (#9274)
- Support saving config file in `print_config` (#9276)
- Update docs about video inference (#9305)
- Update guide about model deployment (#9344)
- Fix doc typos of useful tools (#9177)
- Allow to resume from specific checkpoint in CLI (#9284)
- Update FAQ about windows installation issues of pycocotools (#9292)

### 21.4.5 New Contributors

- @Daa98 made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9274>
- @lvhan028 made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9344>

### 21.4.6 Contributors

A total of 12 developers contributed to this release.

Thanks @sanbuphy, @Czm369, @Daa98, @jbwang1997, @BIGWangYuDong, @JosonChan1998, @lvhan028, @RunningLeon, @RangiLyu, @Daa98, @ZwwWayne, @hhaAndroid

## 21.5 v3.0.0rc3 (4/11/2022)

Upgrade the minimum version requirement of MMEngine to 0.3.0 to use `ignore_key` of `ConcatDataset` for training VOC datasets (#9058)

### 21.5.1 Highlights

- Support [CrowdDet](#) and [EIoU Loss](#)
- Support training detection models in Detectron2
- Refactor Fast R-CNN

### 21.5.2 New Features

- Support [CrowdDet](#) (#8744)
- Support training detection models in Detectron2 with examples of Mask R-CNN, Faster R-CNN, and RetinaNet (#8672)
- Support [EIoU Loss](#) (#9086)

### 21.5.3 Bug Fixes

- Fix `XMLDataset` image size error (#9216)
- Fix bugs of `empty_instances` when predicting without nms in `roi_head` (#9015)
- Fix the config file of DETR (#9158)
- Fix SOLOv2 cannot dealing with empty gt image (#9192)
- Fix inference demo (#9153)
- Add `ignore_key` in `VOC ConcatDataset` (#9058)
- Fix dumping results issue in test scripts. (#9241)
- Fix configs of training coco subsets on MMDet 3.x (#9225)
- Fix `corner2hbox` of `HorizontalBoxes` for supporting empty bboxes (#9140)

### 21.5.4 Improvements

- Refactor Fast R-CNN (#9132)
- Clean requirements of `mmcv-full` due to SyncBN (#9207)
- Support training detection models in `detectron2` (#8672)
- Add `box_type` support for `DynamicSoftLabelAssigner` (#9179)
- Make `scipy` as a default dependency in runtime (#9187)
- Update `eval_metric` (#9062)
- Add `seg_map_suffix` in `BaseDetDataset` (#9088)

### 21.5.5 New Contributors

- @Wwupup made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9086>
- @sanbuphy made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9153>
- @cxiang26 made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9158>
- @JosonChan1998 made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9225>

## 21.5.6 Contributors

A total of 13 developers contributed to this release.

Thanks @wanghonglie, @Wwupup, @sanbuphy, @BIGWangYuDong, @liuyanyi, @cxiang26, @jbwang1997, @ZwwWayne, @yuyoujiang, @RangiLyu, @hhaAndroid, @JosonChan1998, @Czm369

## 21.6 v3.0.0rc2 (21/10/2022)

### 21.6.1 Highlights

- Support imagenet pre-training for RTMDet's backbone

### 21.6.2 New Features

- Support imagenet pre-training for RTMDet's backbone (#8887)
- Add CrowdHumanDataset and Metric (#8430)
- Add FixShapeResize to support resize of fixed shape (#8665)

### 21.6.3 Bug Fixes

- Fix ConcatDataset Import Error (#8909)
- Fix CircleCI and readthedoc build failed (#8980, #8963)
- Fix bitmap mask translate when out\_shape is different (#8993)
- Fix inconsistency in Conv2d weight channels (#8948)
- Fix bugs when plotting loss curve by analyze\_logs.py (#8944)
- Fix type change of labels in albumentations (#9074)
- Fix some docs and types error (#8818)
- Update memory occupation of RTMDet in metafile (#9098)
- Fix wrong arguments of OpenImageMetrics in the config (#9061)

### 21.6.4 Improvements

- Refactor standard roi head with box\_type (#8658)
- Support mask concatenation in BitmapMasks and PolygonMasks (#9006)
- Update PyTorch and dependencies' version in dockerfile (#8845)
- Update robustness\_eval.py and print\_config (#8452)
- Make compatible with ConfigDict and dict in dense\_heads (#8942)
- Support logging coco metric copypaste (#9012)
- Remove Normalize transform (#8913)
- Support jittering the color of different instances of the same class (#8988)

- Add assertion for missing key in PackDetInputs (#8982)

### 21.6.5 New Contributors

- @Chan-Sun made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/8909>
- @MambaWong made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/8913>
- @yuyoujiang made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/8437>
- @sltlis made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/8944>
- @Nioolek made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/8845>
- @wufan-tb made their first contribution in <https://github.com/open-mmlab/mmdetection/pull/9061>

### 21.6.6 Contributors

A total of 13 developers contributed to this release.

Thanks @RangiLyu, @jbwang1997, @wanghonglie, @Chan-Sun, @RangeKing, @chhluo, @MambaWong, @yuyoujiang, @hhaAndroid, @sltlis, @Nioolek, @ZwwWayne, @wufan-tb

## 21.7 v3.0.0rc1 (26/9/2022)

### 21.7.1 Highlights

- Release a high-precision, low-latency single-stage object detector RTMDet.

### 21.7.2 Bug Fixes

- Fix UT to be compatible with PyTorch 1.6 (#8707)
- Fix NumClassCheckHook bug when model is wrapped (#8794)
- Update the right URL of R-50-FPN with BoundedIoULoss (#8805)
- Fix potential bug of indices in RandAugment (#8826)
- Fix some types and links (#8839, #8820, #8793, #8868)
- Fix incorrect background fill values in FSAF and RepPoints Head (#8813)

### 21.7.3 Improvements

- Refactored anchor head and base head with `box_type` (#8625)
- Refactored SemiBaseDetector and SoftTeacher (#8786)
- Add list to dict keys to avoid modify loss dict (#8828)
- Update `analyze_results.py`, `analyze_logs.py` and `loading.py` (#8430, #8402, #8784)
- Support dump results in `test.py` (#8814)
- Check empty predictions in `DetLocalVisualizer._draw_instances` (#8830)

- Fix floordiv warning in SOLO (#8738)

## 21.7.4 Contributors

A total of 16 developers contributed to this release.

Thanks @ZwwWayne, @jbwang1997, @Czm369, @ice-tong, @Zheng-LinXiao, @chhluo, @RangiLyu, @liuyanyi, @wanghonglie, @levan92, @JiayuXu0, @nye0, @hhaAndroid, @xin-li-67, @shuxp, @zytx121

## 21.8 v3.0.0rc0 (31/8/2022)

We are excited to announce the release of MMDetection 3.0.0rc0. MMDet 3.0.0rc0 is the first version of MMDetection 3.x, a part of the OpenMMLab 2.0 projects. Built upon the new [training engine](#), MMDet 3.x unifies the interfaces of the dataset, models, evaluation, and visualization with faster training and testing speed. It also provides a general semi-supervised object detection framework and strong baselines.

### 21.8.1 Highlights

1. **New engine.** MMDet 3.x is based on [MMEEngine](#), which provides a universal and powerful runner that allows more flexible customizations and significantly simplifies the entry points of high-level interfaces.
2. **Unified interfaces.** As a part of the OpenMMLab 2.0 projects, MMDet 3.x unifies and refactors the interfaces and internal logic of training, testing, datasets, models, evaluation, and visualization. All the OpenMMLab 2.0 projects share the same design in those interfaces and logic to allow the emergence of multi-task/modality algorithms.
3. **Faster speed.** We optimize the training and inference speed for common models and configurations, achieving a faster or similar speed than [Detection2](#). Model details of benchmark will be updated in this note.
4. **General semi-supervised object detection.** Benefitting from the unified interfaces, we support a general semi-supervised learning framework that works with all the object detectors supported in MMDet 3.x. Please refer to [semi-supervised object detection](#) for details.
5. **Strong baselines.** We release strong baselines of many popular models to enable fair comparisons among state-of-the-art models.
6. **New features and algorithms:**
  - Enable all the single-stage detectors to serve as region proposal networks
  - [SoftTeacher](#)
  - [the updated CenterNet](#)
7. **More documentation and tutorials.** We add a bunch of documentation and tutorials to help users get started more smoothly. Read it [here](#).

## 21.8.2 Breaking Changes

MMDet 3.x has undergone significant changes for better design, higher efficiency, more flexibility, and more unified interfaces. Besides the changes in API, we briefly list the major breaking changes in this section. We will update the migration guide to provide complete details and migration instructions. Users can also refer to the [API doc](#) for more details.

### Dependencies

- MMDet 3.x runs on PyTorch $\geq$ 1.6. We have deprecated the support of PyTorch 1.5 to embrace mixed precision training and other new features since PyTorch 1.6. Some models can still run on PyTorch 1.5, but the full functionality of MMDet 3.x is not guaranteed.
- MMDet 3.x relies on MMEEngine to run. MMEEngine is a new foundational library for training deep learning models of OpenMMLab and is the core dependency of OpenMMLab 2.0 projects. The dependencies of file IO and training are migrated from MMCV 1.x to MMEEngine.
- MMDet 3.x relies on MMCV $\geq$ 2.0.0rc0. Although MMCV no longer maintains the training functionalities since 2.0.0rc0, MMDet 3.x relies on the data transforms, CUDA operators, and image processing interfaces in MMCV. Note that the package `mmcv` is the version that provides pre-built CUDA operators and `mmcv-lite` does not since MMCV 2.0.0rc0, while `mmcv-full` has been deprecated since 2.0.0rc0.

### Training and testing

- MMDet 3.x uses Runner in [MMEEngine](#) rather than that in MMCV. The new Runner implements and unifies the building logic of the dataset, model, evaluation, and visualizer. Therefore, MMDet 3.x no longer maintains the building logic of those modules in `mmdet.train.apis` and `tools/train.py`. Those codes have been migrated into [MMEEngine](#). Please refer to the [migration guide of Runner in MMEEngine](#) for more details.
- The Runner in MMEEngine also supports testing and validation. The testing scripts are also simplified, which has similar logic to that in training scripts to build the runner.
- The execution points of hooks in the new Runner have been enriched to allow more flexible customization. Please refer to the [migration guide of Hook in MMEEngine](#) for more details.
- Learning rate and momentum schedules have been migrated from Hook to [Parameter Scheduler in MMEEngine](#). Please refer to the [migration guide of Parameter Scheduler in MMEEngine](#) for more details.

### Configs

- The [Runner in MMEEngine](#) uses a different config structure to ease the understanding of the components in the runner. Users can read the [config example of MMDet 3.x](#) or refer to the [migration guide in MMEEngine](#) for migration details.
- The file names of configs and models are also refactored to follow the new rules unified across OpenMMLab 2.0 projects. The names of checkpoints are not updated for now as there is no BC-breaking of model weights between MMDet 3.x and 2.x. We will progressively replace all the model weights with those trained in MMDet 3.x. Please refer to the [user guides of config](#) for more details.

## Dataset

The Dataset classes implemented in MMDet 3.x all inherit from the `BaseDetDataset`, which inherits from the `BaseDataset` in `MMEngine`. In addition to the changes in interfaces, there are several changes in Dataset in MMDet 3.x.

- All the datasets support serializing the internal data list to reduce the memory when multiple workers are built for data loading.
- The internal data structure in the dataset is changed to be self-contained (without losing information like class names in MMDet 2.x) while keeping simplicity.
- The evaluation functionality of each dataset has been removed from the dataset so that some specific evaluation metrics like COCO AP can be used to evaluate the prediction on other datasets.

## Data Transforms

The data transforms in MMDet 3.x all inherits from `BaseTransform` in `MMCV>=2.0.0rc0`, which defines a new convention in OpenMMLab 2.0 projects. Besides the interface changes, there are several changes listed below:

- The functionality of some data transforms (e.g., `Resize`) are decomposed into several transforms to simplify and clarify the usages.
- The format of data dict processed by each data transform is changed according to the new data structure of dataset.
- Some inefficient data transforms (e.g., normalization and padding) are moved into data preprocessor of model to improve data loading and training speed.
- The same data transforms in different OpenMMLab 2.0 libraries have the same augmentation implementation and the logic given the same arguments, i.e., `Resize` in MMDet 3.x and `MMSeg 1.x` will resize the image in the exact same manner given the same arguments.

## Model

The models in MMDet 3.x all inherit from `BaseModel` in `MMEngine`, which defines a new convention of models in OpenMMLab 2.0 projects. Users can refer to [the tutorial of the model in MMEngine](#) for more details. Accordingly, there are several changes as the following:

- The model interfaces, including the input and output formats, are significantly simplified and unified following the new convention in MMDet 3.x. Specifically, all the input data in training and testing are packed into `inputs` and `data_samples`, where `inputs` contains model inputs like a list of image tensors, and `data_samples` contains other information of the current data sample such as ground truths, region proposals, and model predictions. In this way, different tasks in MMDet 3.x can share the same input arguments, which makes the models more general and suitable for multi-task learning and some flexible training paradigms like semi-supervised learning.
- The model has a data preprocessor module, which is used to pre-process the input data of the model. In MMDet 3.x, the data preprocessor usually does the necessary steps to form the input images into a batch, such as padding. It can also serve as a place for some special data augmentations or more efficient data transformations like normalization.
- The internal logic of the model has been changed. In MMDet 2.x, model uses `forward_train`, `forward_test`, `simple_test`, and `aug_test` to deal with different model forward logics. In MMDet 3.x and OpenMMLab 2.0, the forward function has three modes: 'loss', 'predict', and 'tensor' for training, inference, and tracing or other purposes, respectively. The forward function calls `self.loss`, `self.predict`, and `self._forward` given the modes 'loss', 'predict', and 'tensor', respectively.

## Evaluation

The evaluation in MMDet 2.x strictly binds with the dataset. In contrast, MMDet 3.x decomposes the evaluation from dataset so that all the detection datasets can evaluate with COCO AP and other metrics implemented in MMDet 3.x. MMDet 3.x mainly implements corresponding metrics for each dataset, which are manipulated by [Evaluator](#) to complete the evaluation. Users can build an evaluator in MMDet 3.x to conduct offline evaluation, i.e., evaluate predictions that may not produce in MMDet 3.x with the dataset as long as the dataset and the prediction follow the dataset conventions. More details can be found in the [tutorial in mmengine](#).

## Visualization

The functions of visualization in MMDet 2.x are removed. Instead, in OpenMMLab 2.0 projects, we use [Visualizer](#) to visualize data. MMDet 3.x implements `DetLocalVisualizer` to allow visualization of ground truths, model predictions, feature maps, etc., at any place. It also supports sending the visualization data to any external visualization backends such as Tensorboard.

### 21.8.3 Improvements

- Optimized training and testing speed of FCOS, RetinaNet, Faster R-CNN, Mask R-CNN, and Cascade R-CNN. The training speed of those models with some common training strategies is also optimized, including those with synchronized batch normalization and mixed precision training.
- Support mixed precision training of all the models. However, some models may get undesirable performance due to some numerical issues. We will update the documentation and list the results (accuracy of failure) of mixed precision training.
- Release strong baselines of some popular object detectors. Their accuracy and pre-trained checkpoints will be released.

### 21.8.4 Bug Fixes

- DeepFashion dataset: the config and results have been updated.

### 21.8.5 New Features

1. Support a general semi-supervised learning framework that works with all the object detectors supported in MMDet 3.x. Please refer to [semi-supervised object detection](#) for details.
2. Enable all the single-stage detectors to serve as region proposal networks. We give [an example of using FCOS as RPN](#).
3. Support a semi-supervised object detection algorithm: [SoftTeacher](#).
4. Support the updated [CenterNet](#).
5. Support data structures `HorizontalBoxes` and `BaseBoxes` to encapsulate different kinds of bounding boxes. We are migrating to use data structures of boxes to replace the use of pure tensor boxes. This will unify the usages of different kinds of bounding boxes in MMDet 3.x and MMRotate 1.x to simplify the implementation and reduce redundant codes.

### 21.8.6 Planned changes

We list several planned changes of MMDet 3.0.0rc0 so that the community could more comprehensively know the progress of MMDet 3.x. Feel free to create a PR, issue, or discussion if you are interested, have any suggestions and feedback, or want to participate.

1. Test-time augmentation: which is supported in MMDet 2.x, is not implemented in this version due to the limited time slot. We will support it in the following releases with a new and simplified design.
2. Inference interfaces: unified inference interfaces will be supported in the future to ease the use of released models.
3. Interfaces of useful tools that can be used in Jupyter Notebook or Colab: more useful tools that are implemented in the `tools` directory will have their python interfaces so that they can be used in Jupyter Notebook, Colab, and downstream libraries.
4. Documentation: we will add more design docs, tutorials, and migration guidance so that the community can deep dive into our new design, participate the future development, and smoothly migrate downstream libraries to MMDet 3.x.
5. Wandb visualization: MMDet 2.x supports data visualization since v2.25.0, which has not been migrated to MMDet 3.x for now. Since WandB provides strong visualization and experiment management capabilities, a `DetWandBVisualizer` and maybe a hook are planned to fully migrate those functionalities from MMDet 2.x.
6. Full support of WiderFace dataset (#8508) and Fast R-CNN: we are verifying their functionalities and will fix related issues soon.
7. Migrate DETR-series algorithms (#8655, #8533) and YOLOv3 on IPU (#8552) from MMDet 2.x.

### 21.8.7 Contributors

A total of 11 developers contributed to this release. Thanks @shuxp, @wanghonglie, @Czm369, @BIGWangYuDong, @zytx121, @jbwang1997, @chhluo, @jshilong, @RangiLyu, @hhaAndroid, @ZwwWayne



## CHANGELOG V2.X

### 22.1 v2.25.0 (31/5/2022)

#### 22.1.1 Highlights

- Support dedicated WandbLogger hook
- Support ConvNeXt, DDOD, SOLOv2
- Support Mask2Former for instance segmentation
- Rename config files of Mask2Former

#### 22.1.2 Backwards incompatible changes

- Rename config files of Mask2Former (#7571)
  - `mask2former_xxx_coco.py` represents config files for **panoptic segmentation**.
  - `mask2former_xxx_coco.py` represents config files for **instance segmentation**.
  - `mask2former_xxx_coco-panoptic.py` represents config files for **panoptic segmentation**.

#### 22.1.3 New Features

- Support ConvNeXt (#7281)
- Support DDOD (#7279)
- Support SOLOv2 (#7441)
- Support Mask2Former for instance segmentation (#7571, #8032)

#### 22.1.4 Bug Fixes

- Enable YOLOX training on different devices (#7912)
- Fix the log plot error when evaluation with `interval != 1` (#7784)
- Fix RuntimeError of HTC (#8083)

## 22.1.5 Improvements

- Support dedicated WandbLogger hook (#7459)

Users can set

```
cfg.log_config.hooks = [  
    dict(type='MMDetWandbHook',  
          init_kwargs={'project': 'MMDetection-tutorial'},  
          interval=10,  
          log_checkpoint=True,  
          log_checkpoint_metadata=True,  
          num_eval_images=10)]
```

in the config to use MMDetWandbHook. Example can be found in this [colab tutorial](#)

- Add AvoidOOM to avoid OOM (#7434, #8091)

Try to use AvoidCUDAOOM to avoid GPU out of memory. It will first retry after calling `torch.cuda.empty_cache()`. If it still fails, it will then retry by converting the type of inputs to FP16 format. If it still fails, it will try to copy inputs from GPUs to CPUs to continue computing. Try AvoidOOM in code to make the code continue to run when GPU memory runs out:

```
from mmdet.utils import AvoidCUDAOOM  
  
output = AvoidCUDAOOM.retry_if_cuda_oom(some_function)(input1, input2)
```

Users can also try AvoidCUDAOOM as a decorator to make the code continue to run when GPU memory runs out:

```
from mmdet.utils import AvoidCUDAOOM  
  
@AvoidCUDAOOM.retry_if_cuda_oom  
def function(*args, **kwargs):  
    ...  
    return xxx
```

- Support reading `gpu_collect` from `cfg.evaluation.gpu_collect` (#7672)
- Speedup the Video Inference by Accelerating data-loading Stage (#7832)
- Support replacing the `{key}` with the value of `cfg.key` (#7492)
- Accelerate result analysis in `analyze_result.py`. The evaluation time is speedup by 10 ~ 15 times and only tasks 10 ~ 15 minutes now. (#7891)
- Support to set `block_dilations` in DilatedEncoder (#7812)
- Support panoptic segmentation result analysis (#7922)
- Release DyHead with Swin-Large backbone (#7733)
- Documentations updating and adding
  - Fix wrong default type of `act_cfg` in SwinTransformer (#7794)
  - Fix text errors in the tutorials (#7959)
  - Rewrite the installation guide (#7897)
  - Useful hooks (#7810)
  - Fix heading anchor in documentation (#8006)

- Replace markdownlint with mdformat for avoiding installing ruby (#8009)

### 22.1.6 Contributors

A total of 20 developers contributed to this release.

Thanks @ZwwWayne, @DarthThomas, @solyaH, @LutingWang, @chenxinfeng4, @Czm369, @Chenastron, @chh-luo, @austinmw, @Shanyaliux @hellock, @Y-M-Y, @jbwang1997, @hhaAndroid, @Irvingao, @zhanggefan, @BIG-WangYuDong, @Keiku, @PeterVennerstrom, @ayulockin

## 22.2 v2.24.0 (26/4/2022)

### 22.2.1 Highlights

- Support [Simple Copy-Paste is a Strong Data Augmentation Method for Instance Segmentation](#)
- Support automatically scaling LR according to GPU number and samples per GPU
- Support Class Aware Sampler that improves performance on OpenImages Dataset

### 22.2.2 New Features

- Support [Simple Copy-Paste is a Strong Data Augmentation Method for Instance Segmentation](#), see example configs (#7501)
- Support Class Aware Sampler, users can set

```
data=dict(train_dataloader=dict(class_aware_sampler=dict(num_sample_class=1)))
```

in the config to use ClassAwareSampler. Examples can be found in [the configs of OpenImages Dataset](#). (#7436)

- Support automatically scaling LR according to GPU number and samples per GPU. (#7482) In each config, there is a corresponding config of auto-scaling LR as below,

```
auto_scale_lr = dict(enable=True, base_batch_size=N)
```

where N is the batch size used for the current learning rate in the config (also equals to `samples_per_gpu * gpu number` to train this config). By default, we set `enable=False` so that the original usages will not be affected. Users can set `enable=True` in each config or add `--auto-scale-lr` after the command line to enable this feature and should check the correctness of `base_batch_size` in customized configs.

- Support setting dataloader arguments in config and add functions to handle config compatibility. (#7668) The comparison between the old and new usages is as below.

```
data = dict(
    samples_per_gpu=64, workers_per_gpu=4,
    train=dict(type='xxx', ...),
    val=dict(type='xxx', samples_per_gpu=4, ...),
    test=dict(type='xxx', ...),
)
```

```
# A recommended config that is clear
data = dict(
    train=dict(type='xxx', ...),
    val=dict(type='xxx', ...),
    test=dict(type='xxx', ...),
    # Use different batch size during inference.
    train_dataloader=dict(samples_per_gpu=64, workers_per_gpu=4),
    val_dataloader=dict(samples_per_gpu=8, workers_per_gpu=2),
    test_dataloader=dict(samples_per_gpu=8, workers_per_gpu=2),
)

# Old style still works but allows to set more arguments about data loaders
data = dict(
    samples_per_gpu=64, # only works for train_dataloader
    workers_per_gpu=4, # only works for train_dataloader
    train=dict(type='xxx', ...),
    val=dict(type='xxx', ...),
    test=dict(type='xxx', ...),
    # Use different batch size during inference.
    val_dataloader=dict(samples_per_gpu=8, workers_per_gpu=2),
    test_dataloader=dict(samples_per_gpu=8, workers_per_gpu=2),
)
```

- Support memory profile hook. Users can use it to monitor the memory usages during training as below (#7560)

```
custom_hooks = [
    dict(type='MemoryProfilerHook', interval=50)
]
```

- Support to run on PyTorch with MLU chip (#7578)
- Support re-splitting data batch with tag (#7641)
- Support the DiceCost used by [K-Net](#) in [MaskHungarianAssigner](#) (#7716)
- Support splitting COCO data for Semi-supervised object detection (#7431)
- Support Pathlib for Config.fromfile (#7685)
- Support to use file client in OpenImages dataset (#7433)
- Add a probability parameter to Mosaic transformation (#7371)
- Support specifying interpolation mode in Resize pipeline (#7585)

### 22.2.3 Bug Fixes

- Avoid invalid bbox after deform\_sampling (#7567)
- Fix the issue that argument color\_theme does not take effect when exporting confusion matrix (#7701)
- Fix the end\_level in Necks, which should be the index of the end input backbone level (#7502)
- Fix the bug that mix\_results may be None in MultiImageMixDataset (#7530)
- Fix the bug in ResNet plugin when two plugins are used (#7797)

## 22.2.4 Improvements

- Enhance `load_json_logs` of `analyze_logs.py` for resumed training logs (#7732)
- Add argument `out_file` in `image_demo.py` (#7676)
- Allow mixed precision training with `SimOTAAssigner` (#7516)
- Updated INF to 100000.0 to be the same as that in the official YOLOX (#7778)
- Add documentations of:
  - how to get channels of a new backbone (#7642)
  - how to unfreeze the backbone network (#7570)
  - how to train `fast_rcnn` model (#7549)
  - proposals in Deformable DETR (#7690)
  - from-scratch install script in `get_started.md` (#7575)
- Release pre-trained models of
  - Mask2Former (#7595, #7709)
  - RetinaNet with ResNet-18 and release models (#7387)
  - RetinaNet with EfficientNet backbone (#7646)

## 22.2.5 Contributors

A total of 27 developers contributed to this release. Thanks @jovialio, @zhangsanfeng2022, @HarryZJ, @jamiechoi1995, @nestiank, @PeterH0323, @RangeKing, @Y-M-Y, @mattcasey02, @weiji14, @Yulvgit, @xiefeifeihu, @FANG-MING, @meng976537406, @nijkah, @sudz123, @CCODING04, @SheffieldCao, @Czm369, @BIGWangYuDong, @zytx121, @jbwang1997, @chhluo, @jshilong, @RangiLyu, @hhaAndroid, @ZwwWayne

## 22.3 v2.23.0 (28/3/2022)

### 22.3.1 Highlights

- Support Mask2Former: [Masked-attention Mask Transformer for Universal Image Segmentation](#)
- Support EfficientNet: [EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks](#)
- Support setting data root through environment variable `MMDet_DATASETS`, users don't have to modify the corresponding path in config files anymore.
- Find a good recipe for fine-tuning high precision ResNet backbone pre-trained by Torchvision.

### 22.3.2 New Features

- Support Mask2Former(#6938)(#7466)(#7471)
- Support EfficientNet (#7514)
- Support setting data root through environment variable `MMDET_DATASETS`, users don't have to modify the corresponding path in config files anymore. (#7386)
- Support setting different seeds to different ranks (#7432)
- Update the `dist_train.sh` so that the script can be used to support launching multi-node training on machines without slurm (#7415)
- Find a good recipe for fine-tuning high precision ResNet backbone pre-trained by Torchvision (#7489)

### 22.3.3 Bug Fixes

- Fix bug in VOC unit test which removes the data directory (#7270)
- Adjust the order of `get_classes` and `FileClient` (#7276)
- Force the inputs of `get_bboxes` in `yolox_head` to float32 (#7324)
- Fix misplaced arguments in `LoadPanopticAnnotations` (#7388)
- Fix `reduction=mean` in `CELoss`. (#7449)
- Update unit test of `CrossEntropyCost` (#7537)
- Fix memory leaking in panoptic segmentation evaluation (#7538)
- Fix the bug of shape broadcast in YOLOv3 (#7551)

### 22.3.4 Improvements

- Add Chinese version of `onnx2tensorrt.md` (#7219)
- Update colab tutorials (#7310)
- Update information about Localization Distillation (#7350)
- Add Chinese version of `finetune.md` (#7178)
- Update YOLOX log for non square input (#7235)
- Add `nproc` in `coco_panoptic.py` for panoptic quality computing (#7315)
- Allow to set `channel_order` in `LoadImageFromFile` (#7258)
- Take point sample related functions out of `mask_point_head` (#7353)
- Add instance evaluation for `coco_panoptic` (#7313)
- Enhance the robustness of `analyze_logs.py` (#7407)
- Supplementary notes of `sync_random_seed` (#7440)
- Update docstring of cross entropy loss (#7472)
- Update pascal voc result (#7503)
- We create How-to documentation to record any questions about How to xxx. In this version, we added
  - How to use Mosaic augmentation (#7507)

- How to use backbone in mmcls (#7438)
- How to produce and submit the prediction results of panoptic segmentation models on COCO test-dev set (#7430))

### 22.3.5 Contributors

A total of 27 developers contributed to this release. Thanks @ZwwWayne, @haofanwang, @shinya7y, @chh-luo, @yangrisheng, @triple-Mu, @jbwang1997, @HikariTJU, @imflash217, @274869388, @zytx121, @matrixgame2018, @jamiechoi1995, @BIGWangYuDong, @JingweiZhang12, @Xiangxu-0103, @hhaAndroid, @jshilong, @osbm, @ceroytres, @bunge-bedstraw-herb, @Youth-Got, @daavoo, @jiangyitong, @RangiLyu, @CCOD-ING04, @yarkable

## 22.4 v2.22.0 (24/2/2022)

### 22.4.1 Highlights

- Support MaskFormer: [Per-Pixel Classification is Not All You Need for Semantic Segmentation](#) (#7212)
- Support DyHead: [Dynamic Head: Unifying Object Detection Heads with Attentions](#) (#6823)
- Release a good recipe of using ResNet in object detectors pre-trained by [ResNet Strikes Back](#), which consistently brings about 3~4 mAP improvements over RetinaNet, Faster/Mask/Cascade Mask R-CNN (#7001)
- Support [Open Images Dataset](#) (#6331)
- Support TIMM backbone: [PyTorch Image Models](#) (#7020)

### 22.4.2 New Features

- Support MaskFormer (#7212)
- Support DyHead (#6823)
- Support ResNet Strikes Back (#7001)
- Support OpenImages Dataset (#6331)
- Support TIMM backbone (#7020)
- Support visualization for Panoptic Segmentation (#7041)

### 22.4.3 Breaking Changes

In order to support the visualization for Panoptic Segmentation, the `num_classes` can not be `None` when using the `get_palette` function to determine whether to use the panoptic palette.

### 22.4.4 Bug Fixes

- Fix bug for the best checkpoints can not be saved when the `key_score` is None (#7101)
- Fix MixUp transform filter boxes failing case (#7080)
- Add missing properties in SABLHead (#7091)
- Fix bug when NaNs exist in confusion matrix (#7147)
- Fix PALETTE AttributeError in downstream task (#7230)

### 22.4.5 Improvements

- Speed up SimOTA matching (#7098)
- Add Chinese translation of `docs_zh-CN/tutorials/init_cfg.md` (#7188)

### 22.4.6 Contributors

A total of 20 developers contributed to this release. Thanks @ZwwWayne, @hhaAndroid, @RangiLyu, @Aron-Lin, @BIGWangYuDong, @jbwang1997, @zytx121, @chhluo, @shinya7y, @LuooChen, @dvansa, @siatwang-min, @del-zhenwu, @vikashranjan26, @haofanwang, @jamiechoi1995, @HJoonKwon, @yarkable, @zhijian-liu, @RangeKing

## 22.5 v2.21.0 (8/2/2022)

## 22.6 Breaking Changes

To standardize the contents in config READMEs and meta files of OpenMMLab projects, the READMEs and meta files in each config directory have been significantly changed. The template will be released in the future, for now, you can refer to the examples of README for [algorithm](#), [dataset](#) and [backbone](#). To align with the standard, the configs in `dcn` are put into to two directories named `dcn` and `dcnv2`.

### 22.6.1 New Features

- Allow to customize colors of different classes during visualization (#6716)
- Support CPU training (#7016)
- Add download script of COCO, LVIS, and VOC dataset (#7015)

## 22.6.2 Bug Fixes

- Fix weight conversion issue of RetinaNet with Swin-S (#6973)
- Update `__repr__` of Compose (#6951)
- Fix BadZipFile Error when build docker (#6966)
- Fix bug in non-distributed multi-gpu training/testing (#7019)
- Fix bbox clamp in PyTorch 1.10 (#7074)
- Relax the requirement of PALETTE in dataset wrappers (#7085)
- Keep the same weights before reassign in the PAA head (#7032)
- Update code demo in doc (#7092)

## 22.6.3 Improvements

- Speed-up training by allow to set variables of multi-processing (#6974, #7036)
- Add links of Chinese tutorials in readme (#6897)
- Disable cv2 multiprocessing by default for acceleration (#6867)
- Deprecate the support for “python setup.py test” (#6998)
- Re-organize metafiles and config readmes (#7051)
- Fix None grad problem during training TOOD by adding SigmoidGeometricMean (#7090)

## 22.6.4 Contributors

A total of 26 developers contributed to this release. Thanks @del-zhenwu, @zimoqingfeng, @srishilesh, @imyhxy, @jenhaoyang, @jliu-ac, @kimnamu, @ShengliLiu, @garvan2021, @ciusji, @DIYer22, @kimnamu, @q3394101, @zhouzaida, @gaotongxiao, @topsy404, @AntoAndGar, @jbwang1997, @nijkah, @ZwwWayne, @Czm369, @jshilong, @RangiLyu, @BIGWangYuDong, @hhaAndroid, @AronLin

## 22.7 v2.20.0 (27/12/2021)

### 22.7.1 New Features

- Support TOOD: Task-aligned One-stage Object Detection (ICCV 2021 Oral) (#6746)
- Support resuming from the latest checkpoint automatically (#6727)

### 22.7.2 Bug Fixes

- Fix wrong bbox loss\_weight of the PAA head (#6744)
- Fix the padding value of gt\_semantic\_seg in batch collating (#6837)
- Fix test error of lvis when using classwise (#6845)
- Avoid BC-breaking of get\_local\_path (#6719)
- Fix bug in sync\_norm\_hook when the BN layer does not exist (#6852)
- Use pycocotools directly no matter what platform it is (#6838)

### 22.7.3 Improvements

- Add unit test for SimOTA with no valid bbox (#6770)
- Use precommit to check readme (#6802)
- Support selecting GPU-ids in non-distributed testing time (#6781)

### 22.7.4 Contributors

A total of 16 developers contributed to this release. Thanks @ZwwWayne, @Czm369, @jshilong, @RangiLyu, @BIG-WangYuDong, @hhaAndroid, @jamiechoi1995, @AronLin, @Keiku, @gkagkos, @fcakyon, @www516717402, @vansin, @zactodd, @kimnamu, @jenhaoyang

## 22.8 v2.19.1 (14/12/2021)

### 22.8.1 New Features

- Release YOLOX COCO pretrained models (#6698)

### 22.8.2 Bug Fixes

- Fix DCN initialization in DenseHead (#6625)
- Fix initialization of ConvFCHead (#6624)
- Fix PseudoSampler in RCNN (#6622)
- Fix weight initialization in Swin and PVT (#6663)
- Fix dtype bug in BaseDenseHead (#6767)
- Fix SimOTA with no valid bbox (#6733)

### 22.8.3 Improvements

- Add an example of combining swin and one-stage models (#6621)
- Add `get_ann_info` to `dataset_wrappers` (#6526)
- Support keeping image ratio in the multi-scale training of YOLOX (#6732)
- Support `bbox_clip_border` for the augmentations of YOLOX (#6730)

### 22.8.4 Documents

- Update metafile (#6717)
- Add `mmhuman3d` in readme (#6699)
- Update FAQ docs (#6587)
- Add doc for `detect_anomalous_params` (#6697)

### 22.8.5 Contributors

A total of 11 developers contributed to this release. Thanks @ZwwWayne, @LJoson, @Czm369, @jshilong, @ZC-Max, @RangiLyu, @BIGWangYuDong, @hhaAndroid, @zhaoxin111, @GT9505, @shinya7y

## 22.9 v2.19.0 (29/11/2021)

### 22.9.1 Highlights

- Support [Label Assignment Distillation](#)
- Support `persistent_workers` for Pytorch  $\geq 1.7$
- Align accuracy to the updated official YOLOX

### 22.9.2 New Features

- Support [Label Assignment Distillation](#) (#6342)
- Support `persistent_workers` for Pytorch  $\geq 1.7$  (#6435)

### 22.9.3 Bug Fixes

- Fix repeatedly output warning message (#6584)
- Avoid infinite GPU waiting in dist training (#6501)
- Fix SSD512 config error (#6574)
- Fix MMDetection model to ONNX command (#6558)

## 22.9.4 Improvements

- Refactor configs of FP16 models (#6592)
- Align accuracy to the updated official YOLOX (#6443)
- Speed up training and reduce memory cost when using PhotoMetricDistortion. (#6442)
- Make OHEM work with seesaw loss (#6514)

## 22.9.5 Documents

- Update README.md (#6567)

## 22.9.6 Contributors

A total of 11 developers contributed to this release. Thanks @FloydHsiu, @RangiLyu, @ZwwWayne, @AndreaPi, @st9007a, @hachreak, @BIGWangYuDong, @hhaAndroid, @AronLin, @chhluo, @vealocia, @HarborYuan, @st9007a, @jshilong

## 22.10 v2.18.1 (15/11/2021)

### 22.10.1 Highlights

- Release [QueryInst](#) pre-trained weights (#6460)
- Support plot confusion matrix (#6344)

### 22.10.2 New Features

- Release [QueryInst](#) pre-trained weights (#6460)
- Support plot confusion matrix (#6344)

### 22.10.3 Bug Fixes

- Fix aug test error when the number of prediction bboxes is 0 (#6398)
- Fix SpatialReductionAttention in PVT (#6488)
- Fix wrong use of `trunc_normal_init` in PVT and Swin-Transformer (#6432)

## 22.10.4 Improvements

- Save the printed AP information of COCO API to logger (#6505)
- Always map location to cpu when load checkpoint (#6405)
- Set a random seed when the user does not set a seed (#6457)

## 22.10.5 Documents

- Chinese version of Corruption Benchmarking (#6375)
- Fix config path in docs (#6396)
- Update GROIE readme (#6401)

## 22.10.6 Contributors

A total of 11 developers contributed to this release. Thanks @st9007a, @hachreak, @HarborYuan, @vealocia, @chh-luo, @AndreaPi, @AronLin, @BIGWangYuDong, @hhaAndroid, @RangiLyu, @ZwwWayne

# 22.11 v2.18.0 (27/10/2021)

## 22.11.1 Highlights

- Support `QueryInst` (#6050)
- Refactor dense heads to decouple onnx export logics from `get_bboxes` and speed up inference (#5317, #6003, #6369, #6268, #6315)

## 22.11.2 New Features

- Support `QueryInst` (#6050)
- Support infinite sampler (#5996)

## 22.11.3 Bug Fixes

- Fix `init_weight` in `fcn_mask_head` (#6378)
- Fix type error in `imshow_bboxes` of RPN (#6386)
- Fix broken colab link in MMDetection Tutorial (#6382)
- Make sure the device and dtype of `scale_factor` are the same as `bboxes` (#6374)
- Remove sampling hardcoded (#6317)
- Fix RandomAffine bbox coordinate recorection (#6293)
- Fix init bug of final cls/reg layer in convfc head (#6279)
- Fix `img_shape` broken in `auto_augment` (#6259)
- Fix kwargs parameter missing error in `two_stage` (#6256)

### 22.11.4 Improvements

- Unify the interface of stuff head and panoptic head (#6308)
- Polish readme (#6243)
- Add code-spell pre-commit hook and fix a typo (#6306)
- Fix typo (#6245, #6190)
- Fix sampler unit test (#6284)
- Fix `forward_dummy` of YOLACT to enable `get_flops` (#6079)
- Fix link error in the config documentation (#6252)
- Adjust the order to beautify the document (#6195)

### 22.11.5 Refactors

- Refactor one-stage `get_bboxes` logic (#5317)
- Refactor ONNX export of One-Stage models (#6003, #6369)
- Refactor `dense_head` and speedup (#6268)
- Migrate to use `prior_generator` in training of dense heads (#6315)

### 22.11.6 Contributors

A total of 18 developers contributed to this release. Thanks @Boyden, @onnkeat, @st9007a, @vealocia, @yhcao6, @DapangpangX, @yellowdolphin, @cclauss, @kennymckormick, @pingguokiller, @collinzrj, @AndreaPi, @Aron-Lin, @BIGWangYuDong, @hhaAndroid, @jshilong, @RangiLyu, @ZwwWayne

## 22.12 v2.17.0 (28/9/2021)

### 22.12.1 Highlights

- Support [PVT](#) and [PVTv2](#)
- Support [SOLO](#)
- Support large scale jittering and New Mask R-CNN baselines
- Speed up YOLOv3 inference

### 22.12.2 New Features

- Support [PVT](#) and [PVTv2](#) (#5780)
- Support [SOLO](#) (#5832)
- Support large scale jittering and New Mask R-CNN baselines (#6132)
- Add a general data structure for the results of models (#5508)
- Added a base class for one-stage instance segmentation (#5904)

- Speed up YOLOv3 inference (#5991)
- Release Swin Transformer pre-trained models (#6100)
- Support mixed precision training in YOLOX (#5983)
- Support val workflow in YOLACT (#5986)
- Add script to test torchserve (#5936)
- Support onnxsim with dynamic input shape (#6117)

### 22.12.3 Bug Fixes

- Fix the function naming errors in `model_wrappers` (#5975)
- Fix regression loss bug when the input is an empty tensor (#5976)
- Fix scores not contiguous error in `centernet_head` (#6016)
- Fix missing parameters bug in `imshow_bboxes` (#6034)
- Fix bug in `aug_test` of HTC when the length of `det_bboxes` is 0 (#6088)
- Fix empty proposal errors in the training of some two-stage models (#5941)
- Fix `dynamic_axes` parameter error in ONNX dynamic shape export (#6104)
- Fix `dynamic_shape` bug of `SyncRandomSizeHook` (#6144)
- Fix the Swin Transformer config link error in the configuration (#6172)

### 22.12.4 Improvements

- Add filter rules in Mosaic transform (#5897)
- Add size divisor in get flops to avoid some potential bugs (#6076)
- Add Chinese translation of `docs_zh-CN/tutorials/customize_dataset.md` (#5915)
- Add Chinese translation of `conventions.md` (#5825)
- Add description of the output of data pipeline (#5886)
- Add dataset information in the README file for PanopticFPN (#5996)
- Add `extra_repr` for DropBlock layer to get details in the model printing (#6140)
- Fix CI out of memory and add PyTorch1.9 Python3.9 unit tests (#5862)
- Fix download links error of some model (#6069)
- Improve the generalization of XML dataset (#5943)
- Polish assertion error messages (#6017)
- Remove `opencv-python-headless` dependency by `albumentations` (#5868)
- Check dtype in transform unit tests (#5969)
- Replace the default theme of documentation with PyTorch Sphinx Theme (#6146)
- Update the paper and code fields in the metafile (#6043)
- Support to customize padding value of segmentation map (#6152)
- Support to resize multiple segmentation maps (#5747)

## 22.12.5 Contributors

A total of 24 developers contributed to this release. Thanks @morkovka1337, @HarborYuan, @guillaumefrd, @guigarfr, @www516717402, @gaotongxiao, @ypwhs, @MartaYang, @shinya7y, @justiceeem, @zhaojinjian0000, @VVsssssk, @aravind-anantha, @wangbo-zhao, @zczup, @whai362, @zczup, @marijnl, @AronLin, @BIG-WangYuDong, @hhaAndroid, @jshilong, @RangiLyu, @ZwwWayne

## 22.13 v2.16.0 (30/8/2021)

### 22.13.1 Highlights

- Support [Panoptic FPN](#) and [Swin Transformer](#)

### 22.13.2 New Features

- Support [Panoptic FPN](#) and release models (#5577, #5902)
- Support Swin Transformer backbone (#5748)
- Release RetinaNet models pre-trained with multi-scale 3x schedule (#5636)
- Add script to convert unlabeled image list to coco format (#5643)
- Add hook to check whether the loss value is valid (#5674)
- Add YOLO anchor optimizing tool (#5644)
- Support export onnx models without post process. (#5851)
- Support classwise evaluation in CocoPanopticDataset (#5896)
- Adapt browse\_dataset for concatenated datasets. (#5935)
- Add PatchEmbed and PatchMerging with AdaptivePadding (#5952)

### 22.13.3 Bug Fixes

- Fix unit tests of YOLOX (#5859)
- Fix lose randomness in imshow\_det\_bboxes (#5845)
- Make output result of ImageToTensor contiguous (#5756)
- Fix inference bug when calling regress\_by\_class in RoIHead in some cases (#5884)
- Fix bug in CIoU loss where alpha should not have gradient. (#5835)
- Fix the bug that multiscale\_output is defined but not used in HRNet (#5887)
- Set the priority of EvalHook to LOW. (#5882)
- Fix a YOLOX bug when applying bbox rescaling in test mode (#5899)
- Fix mosaic coordinate error (#5947)
- Fix dtype of bbox in RandomAffine. (#5930)

### 22.13.4 Improvements

- Add Chinese version of `data_pipeline` and (#5662)
- Support to remove state dicts of EMA when publishing models. (#5858)
- Refactor the loss function in HTC and SCNet (#5881)
- Use warnings instead of `logger.warning` (#5540)
- Use legacy coordinate in metric of VOC (#5627)
- Add Chinese version of `customize_losses` (#5826)
- Add Chinese version of `model_zoo` (#5827)

### 22.13.5 Contributors

A total of 19 developers contributed to this release. Thanks @ypwhs, @zywvvd, @collinzrj, @OceanPang, @ddo-natien, @@haotian-liu, @viibridges, @Muyun99, @guigarfr, @zhaojinjian0000, @jbwang1997, @wangbo-zhao, @xvjiarui, @RangiLyu, @jshilong, @AronLin, @BIGWangYuDong, @hhaAndroid, @ZwwWayne

## 22.14 v2.15.1 (11/8/2021)

### 22.14.1 Highlights

- Support YOLOX

### 22.14.2 New Features

- Support YOLOX(#5756, #5758, #5760, #5767, #5770, #5774, #5777, #5808, #5828, #5848)

### 22.14.3 Bug Fixes

- Update correct SSD models. (#5789)
- Fix casting error in mask structure (#5820)
- Fix MMCV deployment documentation links. (#5790)

### 22.14.4 Improvements

- Use dynamic MMCV download link in TorchServe dockerfile (#5779)
- Rename the function `upsample_like` to `interpolate_as` for more general usage (#5788)

### 22.14.5 Contributors

A total of 14 developers contributed to this release. Thanks @HAOCHENYE, @xiaohu2015, @HsLOL, @zhiqwang, @Adamdad, @shinya7y, @Johnson-Wang, @RangiLyu, @jshilong, @mmeendez8, @AronLin, @BIGWangYuDong, @hhaAndroid, @ZwwWayne

## 22.15 v2.15.0 (02/8/2021)

### 22.15.1 Highlights

- Support adding **MIM** dependencies during pip installation
- Support MobileNetV2 for SSD-Lite and YOLOv3
- Support Chinese Documentation

### 22.15.2 New Features

- Add function `upsample_like` (#5732)
- Support to output pdf and epub format documentation (#5738)
- Support and release Cascade Mask R-CNN 3x pre-trained models (#5645)
- Add `ignore_index` to `CrossEntropyLoss` (#5646)
- Support adding **MIM** dependencies during pip installation (#5676)
- Add MobileNetV2 config and models for YOLOv3 (#5510)
- Support COCO Panoptic Dataset (#5231)
- Support ONNX export of cascade models (#5486)
- Support DropBlock with RetinaNet (#5544)
- Support MobileNetV2 SSD-Lite (#5526)

### 22.15.3 Bug Fixes

- Fix the device of label in `multiclass_nms` (#5673)
- Fix error of backbone initialization from pre-trained checkpoint in config file (#5603, #5550)
- Fix download links of RegNet pretrained weights (#5655)
- Fix two-stage runtime error given empty proposal (#5559)
- Fix flops count error in DETR (#5654)
- Fix unittest for `NumClassCheckHook` when it is not used. (#5626)
- Fix description bug of using custom dataset (#5546)
- Fix bug of `multiclass_nms` that returns the global indices (#5592)
- Fix `valid_mask` logic error in `RPNHead` (#5562)
- Fix unit test error of pretrained configs (#5561)
- Fix typo error in `anchor_head.py` (#5555)

- Fix bug when using dataset wrappers (#5552)
- Fix a typo error in demo/MMDet\_Tutorial.ipynb (#5511)
- Fixing crash in `get_root_logger` when `cfg.log_level` is not None (#5521)
- Fix docker version (#5502)
- Fix optimizer parameter error when using `IterBasedRunner` (#5490)

## 22.15.4 Improvements

- Add unit tests for `MMTracking` (#5620)
- Add Chinese translation of documentation (#5718, #5618, #5558, #5423, #5593, #5421, #5408, #5369, #5419, #5530, #5531)
- Update resource limit (#5697)
- Update docstring for `InstaBoost` (#5640)
- Support key `reduction_override` in all loss functions (#5515)
- Use `repeatdataset` to accelerate CenterNet training (#5509)
- Remove unnecessary code in `autoassign` (#5519)
- Add documentation about `init_cfg` (#5273)

## 22.15.5 Contributors

A total of 18 developers contributed to this release. Thanks @OceanPang, @AronLin, @hellock, @Outsider565, @RangiLyu, @ElectronicElephant, @likyoo, @BIGWangYuDong, @hhaAndroid, @noobyng, @yyz561, @likyoo, @zeakey, @ZwwWayne, @ChenyangLiu, @johnson-magic, @qingswu, @BuxianChen

## 22.16 v2.14.0 (29/6/2021)

### 22.16.1 Highlights

- Add `simple_test` to dense heads to improve the consistency of single-stage and two-stage detectors
- Revert the `test_mixins` to single image test to improve efficiency and readability
- Add Faster R-CNN and Mask R-CNN config using multi-scale training with 3x schedule

### 22.16.2 New Features

- Support pretrained models from MoCo v2 and SwAV (#5286)
- Add Faster R-CNN and Mask R-CNN config using multi-scale training with 3x schedule (#5179, #5233)
- Add `reduction_override` in `MSELoss` (#5437)
- Stable support of exporting DETR to ONNX with dynamic shapes and batch inference (#5168)
- Stable support of exporting PointRend to ONNX with dynamic shapes and batch inference (#5440)

### 22.16.3 Bug Fixes

- Fix size mismatch bug in `multiclass_nms` (#4980)
- Fix the import path of `MultiScaleDeformableAttention` (#5338)
- Fix errors in config of GCNet ResNext101 models (#5360)
- Fix Grid-RCNN error when there is no bbox result (#5357)
- Fix errors in `onnx_export` of `bbox_head` when setting `reg_class_agnostic` (#5468)
- Fix type error of `AutoAssign` in the document (#5478)
- Fix web links ending with `.md` (#5315)

### 22.16.4 Improvements

- Add `simple_test` to dense heads to improve the consistency of single-stage and two-stage detectors (#5264)
- Add support for mask diagonal flip in TTA (#5403)
- Revert the `test_mixins` to single image test to improve efficiency and readability (#5249)
- Make YOLOv3 Neck more flexible (#5218)
- Refactor SSD to make it more general (#5291)
- Refactor `anchor_generator` and `point_generator` (#5349)
- Allow to configure out the `mask_head` of the HTC algorithm (#5389)
- Delete deprecated warning in FPN (#5311)
- Move `model.pretrained` to `model.backbone.init_cfg` (#5370)
- Make deployment tools more friendly to use (#5280)
- Clarify installation documentation (#5316)
- Add ImageNet Pretrained Models docs (#5268)
- Add FAQ about training loss=nan solution and COCO AP or AR =-1 (# 5312, #5313)
- Change all weight links of http to https (#5328)

## 22.17 v2.13.0 (01/6/2021)

### 22.17.1 Highlights

- Support new methods: [CenterNet](#), [Seesaw Loss](#), [MobileNetV2](#)

### 22.17.2 New Features

- Support paper [Objects as Points](#) (#4602)
- Support paper [Seesaw Loss for Long-Tailed Instance Segmentation \(CVPR 2021\)](#) (#5128)
- Support [MobileNetV2](#) backbone and inverted residual block (#5122)
- Support [MIM](#) (#5143)
- ONNX exportation with dynamic shapes of CornerNet (#5136)
- Add `mask_soft` config option to allow non-binary masks (#4615)
- Add PWC metafile (#5135)

### 22.17.3 Bug Fixes

- Fix YOLOv3 FP16 training error (#5172)
- Fix Cascade R-CNN TTA test error when `det_bboxes` length is 0 (#5221)
- Fix `iou_thr` variable naming errors in VOC recall calculation function (#5195)
- Fix Faster R-CNN performance dropped in ONNX Runtime (#5197)
- Fix DETR dict changed error when using python 3.8 during iteration (#5226)

### 22.17.4 Improvements

- Refactor ONNX export of two stage detector (#5205)
- Replace MMDetection's EvalHook with MMCV's EvalHook for consistency (#4806)
- Update RoI extractor for ONNX (#5194)
- Use better parameter initialization in YOLOv3 head for higher performance (#5181)
- Release new DCN models of Mask R-CNN by mixed-precision training (#5201)
- Update YOLOv3 model weights (#5229)
- Add DetectoRS ResNet-101 model weights (#4960)
- Discard bboxes with sizes equals to `min_bbox_size` (#5011)
- Remove duplicated code in DETR head (#5129)
- Remove unnecessary object in class definition (#5180)
- Fix doc link (#5192)

## 22.18 v2.12.0 (01/5/2021)

### 22.18.1 Highlights

- Support new methods: [AutoAssign](#), [YOLOF](#), and [Deformable DETR](#)
- Stable support of exporting models to ONNX with batched images and dynamic shape (#5039)

### 22.18.2 Backwards Incompatible Changes

MMDetection is going through big refactoring for more general and convenient usages during the releases from v2.12.0 to v2.15.0 (maybe longer). In v2.12.0 MMDetection inevitably brings some BC-breakings, including the MMCV dependency, model initialization, model registry, and mask AP evaluation.

- MMCV version. MMDetection v2.12.0 relies on the newest features in MMCV 1.3.3, including `BaseModule` for unified parameter initialization, model registry, and the CUDA operator `MultiScaleDeformableAttn` for [Deformable DETR](#). Note that MMCV 1.3.2 already contains all the features used by MMDet but has known issues. Therefore, we recommend users skip MMCV v1.3.2 and use v1.3.3, though v1.3.2 might work for most cases.
- Unified model initialization (#4750). To unify the parameter initialization in OpenMMLab projects, MMCV supports `BaseModule` that accepts `init_cfg` to allow the modules' parameters initialized in a flexible and unified manner. Now the users need to explicitly call `model.init_weights()` in the training script to initialize the model (as in [here](#), previously this was handled by the detector. The models in MMDetection have been re-benchmarked to ensure accuracy based on PR #4750. **The downstream projects should update their code accordingly to use MMDetection v2.12.0.**
- Unified model registry (#5059). To easily use backbones implemented in other OpenMMLab projects, MMDetection migrates to inherit the model registry created in MMCV (#760). In this way, as long as the backbone is supported in an OpenMMLab project and that project also uses the registry in MMCV, users can use that backbone in MMDetection by simply modifying the config without copying the code of that backbone into MMDetection.
- Mask AP evaluation (#4898). Previous versions calculate the areas of masks through the bounding boxes when calculating the mask AP of small, medium, and large instances. To indeed use the areas of masks, we pop the key `bbox` during mask AP calculation. This change does not affect the overall mask AP evaluation and aligns the mask AP of similar models in other projects like Detectron2.

### 22.18.3 New Features

- Support paper [AutoAssign: Differentiable Label Assignment for Dense Object Detection](#) (#4295)
- Support paper [You Only Look One-level Feature](#) (#4295)
- Support paper [Deformable DETR: Deformable Transformers for End-to-End Object Detection](#) (#4778)
- Support calculating IoU with FP16 tensor in `bbox_overlaps` to save memory and keep speed (#4889)
- Add `__repr__` in custom dataset to count the number of instances (#4756)
- Add windows support by updating `requirements.txt` (#5052)
- Stable support of exporting models to ONNX with batched images and dynamic shape, including SSD, FSAF, FCOS, YOLOv3, RetinaNet, Faster R-CNN, and Mask R-CNN (#5039)

## 22.18.4 Improvements

- Use MMCV MODEL\_REGISTRY (#5059)
- Unified parameter initialization for more flexible usage (#4750)
- Rename variable names and fix docstring in anchor head (#4883)
- Support training with empty GT in Cascade RPN (#4928)
- Add more details of usage of `test_robustness` in documentation (#4917)
- Changing to use `pycocotools` instead of `mmpycocotools` to fully support Detectron2 and MMDetection in one environment (#4939)
- Update torch serve dockerfile to support dockers of more versions (#4954)
- Add check for training with single class dataset (#4973)
- Refactor transformer and DETR Head (#4763)
- Update FPG model zoo (#5079)
- More accurate mask AP of small/medium/large instances (#4898)

## 22.18.5 Bug Fixes

- Fix bug in `mean_ap.py` when calculating mAP by 11 points (#4875)
- Fix error when key `meta` is not in old checkpoints (#4936)
- Fix hanging bug when training with empty GT in VFNet, GFL, and FCOS by changing the place of `reduce_mean` (#4923, #4978, #5058)
- Fix asynchronized inference error and provide related demo (#4941)
- Fix IoU losses dimensionality unmatched error (#4982)
- Fix `torch.randperm` when using PyTorch 1.8 (#5014)
- Fix empty bbox error in `mask_head` when using CARAFE (#5062)
- Fix `supplement_mask` bug when there are zero-size RoIs (#5065)
- Fix testing with empty rois in RoI Heads (#5081)

## 22.19 v2.11.0 (01/4/2021)

### Highlights

- Support new method: [Localization Distillation for Object Detection](#)
- Support Pytorch2ONNX with batch inference and dynamic shape

### New Features

- Support [Localization Distillation for Object Detection](#) (#4758)
- Support Pytorch2ONNX with batch inference and dynamic shape for Faster-RCNN and mainstream one-stage detectors (#4796)

### Improvements

- Support batch inference in head of RetinaNet (#4699)

- Add batch dimension in second stage of Faster-RCNN (#4785)
- Support batch inference in bbox coder (#4721)
- Add check for `ann_ids` in `COCODataset` to ensure it is unique (#4789)
- support for showing the FPN results (#4716)
- support dynamic shape for `grid_anchor` (#4684)
- Move `pycocotools` version check to when it is used (#4880)

**Bug Fixes**

- Fix a bug of TridentNet when doing the batch inference (#4717)
- Fix a bug of Pytorch2ONNX in FASF (#4735)
- Fix a bug when show the image with float type (#4732)

## 22.20 v2.10.0 (01/03/2021)

### 22.20.1 Highlights

- Support new methods: [FPG](#)
- Support ONNX2TensorRT for SSD, FSAF, FCOS, YOLOv3, and Faster R-CNN.

### 22.20.2 New Features

- Support ONNX2TensorRT for SSD, FSAF, FCOS, YOLOv3, and Faster R-CNN (#4569)
- Support [Feature Pyramid Grids \(FPG\)](#) (#4645)
- Support video demo (#4420)
- Add seed option for sampler (#4665)
- Support to customize type of runner (#4570, #4669)
- Support synchronizing BN buffer in `EvalHook` (#4582)
- Add script for GIF demo (#4573)

### 22.20.3 Bug Fixes

- Fix `ConfigDict` `AttributeError` and add Colab link (#4643)
- Avoid crash in empty gt training of GFL head (#4631)
- Fix `iou_thrs` bug in RPN evaluation (#4581)
- Fix syntax error of config when upgrading model version (#4584)

## 22.20.4 Improvements

- Refactor unit test file structures (#4600)
- Refactor nms config (#4636)
- Get loading pipeline by checking the class directly rather than through config strings (#4619)
- Add doctests for mask target generation and mask structures (#4614)
- Use deep copy when copying pipeline arguments (#4621)
- Update documentations (#4642, #4650, #4620, #4630)
- Remove redundant code calling `import_modules_from_strings` (#4601)
- Clean deprecated FP16 API (#4571)
- Check whether CLASSES is correctly initialized in the initialization of `XMLDataset` (#4555)
- Support batch inference in the inference API (#4462, #4526)
- Clean deprecated warning and fix 'meta' error (#4695)

## 22.21 v2.9.0 (01/02/2021)

### 22.21.1 Highlights

- Support new methods: [SCNet](#), [Sparse R-CNN](#)
- Move `train_cfg` and `test_cfg` into model in configs
- Support to visualize results based on prediction quality

### 22.21.2 New Features

- Support [SCNet](#) (#4356)
- Support [Sparse R-CNN](#) (#4219)
- Support evaluate mAP by multiple IoUs (#4398)
- Support concatenate dataset for testing (#4452)
- Support to visualize results based on prediction quality (#4441)
- Add ONNX simplify option to Pytorch2ONNX script (#4468)
- Add hook for checking compatibility of class numbers in heads and datasets (#4508)

### 22.21.3 Bug Fixes

- Fix CPU inference bug of Cascade RPN (#4410)
- Fix NMS error of CornerNet when there is no prediction box (#4409)
- Fix TypeError in CornerNet inference (#4411)
- Fix bug of PAA when training with background images (#4391)
- Fix the error that the window data is not destroyed when `out_file is not None` and `show==False` (#4442)
- Fix order of NMS `score_factor` that will decrease the performance of YOLOv3 (#4473)
- Fix bug in HTC TTA when the number of detection boxes is 0 (#4516)
- Fix resize error in mask data structures (#4520)

### 22.21.4 Improvements

- Allow to customize classes in LVIS dataset (#4382)
- Add tutorials for building new models with existing datasets (#4396)
- Add CPU compatibility information in documentation (#4405)
- Add documentation of deprecated `ImageToTensor` for batch inference (#4408)
- Add more details in documentation for customizing dataset (#4430)
- Switch `imshow_det_bboxes` visualization backend from OpenCV to Matplotlib (#4389)
- Deprecate `ImageToTensor` in `image_demo.py` (#4400)
- Move `train_cfg/test_cfg` into model (#4347, #4489)
- Update docstring for `reg_decoded_bbox` option in bbox heads (#4467)
- Update dataset information in documentation (#4525)
- Release pre-trained R50 and R101 PAA detectors with multi-scale 3x training schedules (#4495)
- Add guidance for speed benchmark (#4537)

## 22.22 v2.8.0 (04/01/2021)

### 22.22.1 Highlights

- Support new methods: [Cascade RPN](#), [TridentNet](#)

### 22.22.2 New Features

- Support [Cascade RPN](#) (#1900)
- Support [TridentNet](#) (#3313)

### 22.22.3 Bug Fixes

- Fix bug of show result in `async_benchmark` (#4367)
- Fix scale factor in `MaskTestMixin` (#4366)
- Fix but when returning indices in `multiclass_nms` (#4362)
- Fix bug of empirical attention in resnext backbone error (#4300)
- Fix bug of `img_norm_cfg` in FCOS-HRNet models with updated performance and models (#4250)
- Fix invalid checkpoint and log in Mask R-CNN models on Cityscapes dataset (#4287)
- Fix bug in distributed sampler when dataset is too small (#4257)
- Fix bug of 'PAFPN has no attribute extra\_convs\_on\_inputs' (#4235)

### 22.22.4 Improvements

- Update model url from aws to aliyun (#4349)
- Update ATSS for PyTorch 1.6+ (#4359)
- Update script to install ruby in pre-commit installation (#4360)
- Delete deprecated `mmdet.ops` (#4325)
- Refactor hungarian assigner for more general usage in Sparse R-CNN (#4259)
- Handle scipy import in DETR to reduce package dependencies (#4339)
- Update documentation of usages for config options after MMCV (1.2.3) supports overriding list in config (#4326)
- Update pre-train models of faster rcnn trained on COCO subsets (#4307)
- Avoid zero or too small value for beta in Dynamic R-CNN (#4303)
- Add documentation for Pytorch2ONNX (#4271)
- Add deprecated warning FPN arguments (#4264)
- Support returning indices of kept bboxes when using nms (#4251)
- Update type and device requirements when creating tensors `GFLHead` (#4210)
- Update device requirements when creating tensors in `CrossEntropyLoss` (#4224)

## 22.23 v2.7.0 (30/11/2020)

- Support new method: DETR, ResNeSt, Faster R-CNN DC5.
- Support YOLO, Mask R-CNN, and Cascade R-CNN models exportable to ONNX.

### 22.23.1 New Features

- Support DETR (#4201, #4206)
- Support to link the best checkpoint in training (#3773)
- Support to override config through options in inference.py (#4175)
- Support YOLO, Mask R-CNN, and Cascade R-CNN models exportable to ONNX (#4087, #4083)
- Support ResNeSt backbone (#2959)
- Support unclip border bbox regression (#4076)
- Add tpf func in evaluating AP (#4069)
- Support mixed precision training of SSD detector with other backbones (#4081)
- Add Faster R-CNN DC5 models (#4043)

### 22.23.2 Bug Fixes

- Fix bug of gpu\_id in distributed training mode (#4163)
- Support Albumentations with version higher than 0.5 (#4032)
- Fix num\_classes bug in faster rcnn config (#4088)
- Update code in docs/2\_new\_data\_model.md (#4041)

### 22.23.3 Improvements

- Ensure DCN offset to have similar type as features in VFNet (#4198)
- Add config links in README files of models (#4190)
- Add tutorials for loss conventions (#3818)
- Add solution to installation issues in 30-series GPUs (#4176)
- Update docker version in get\_started.md (#4145)
- Add model statistics and polish some titles in configs README (#4140)
- Clamp neg probability in FreeAnchor (#4082)
- Speed up expanding large images (#4089)
- Fix Pytorch 1.7 incompatibility issues (#4103)
- Update trouble shooting page to resolve segmentation fault (#4055)
- Update aLRP-Loss in project page (#4078)
- Clean duplicated reduce\_mean function (#4056)
- Refactor Q&A (#4045)

## 22.24 v2.6.0 (1/11/2020)

- Support new method: [VarifocalNet](#).
- Refactored documentation with more tutorials.

### 22.24.1 New Features

- Support GIoU calculation in `BboxOverlaps2D`, and re-implement `giou_loss` using `bbox_overlaps` (#3936)
- Support random sampling in CPU mode (#3948)
- Support VarifocalNet (#3666, #4024)

### 22.24.2 Bug Fixes

- Fix SABL validating bug in Cascade R-CNN (#3913)
- Avoid division by zero in PAA head when `num_pos=0` (#3938)
- Fix temporary directory bug of multi-node testing error (#4034, #4017)
- Fix `--show-dir` option in test script (#4025)
- Fix GA-RetinaNet r50 model url (#3983)
- Update code in docs and fix broken urls (#3947)

### 22.24.3 Improvements

- Refactor `pytorch2onnx` API into `mmdet.core.export` and use `generate_inputs_and_wrap_model` for `pytorch2onnx` (#3857, #3912)
- Update RPN upgrade scripts for v2.5.0 compatibility (#3986)
- Use `mmcv.tensor2imgs` (#4010)
- Update test robustness (#4000)
- Update trouble shooting page (#3994)
- Accelerate PAA training speed (#3985)
- Support `batch_size > 1` in validation (#3966)
- Use RoIAlign implemented in MMCV for inference in CPU mode (#3930)
- Documentation refactoring (#4031)

## 22.25 v2.5.0 (5/10/2020)

### 22.25.1 Highlights

- Support new methods: [YOLACT](#), [CentripetalNet](#).
- Add more documentations for easier and more clear usage.

### 22.25.2 Backwards Incompatible Changes

**FP16 related methods are imported from mmcv instead of mmdet. (#3766, #3822)** Mixed precision training utils in `mmdet.core.fp16` are moved to `mmcv.runner`, including `force_fp32`, `auto_fp16`, `wrap_fp16_model`, and `Fp16OptimizerHook`. A deprecation warning will be raised if users attempt to import those methods from `mmdet.core.fp16`, and will be finally removed in V2.10.0.

**[0, N-1] represents foreground classes and N indicates background classes for all models. (#3221)** Before v2.5.0, the background label for RPN is 0, and N for other heads. Now the behavior is consistent for all models. Thus `self.background_labels` in `dense_heads` is removed and all heads use `self.num_classes` to indicate the class index of background labels. This change has no effect on the pre-trained models in the v2.x model zoo, but will affect the training of all models with RPN heads. Two-stage detectors whose RPN head uses softmax will be affected because the order of categories is changed.

**Only call `get_subset_by_classes` when `test_mode=True` and `self.filter_empty_gt=True` (#3695)** Function `get_subset_by_classes` in dataset is refactored and only filters out images when `test_mode=True` and `self.filter_empty_gt=True`. In the original implementation, `get_subset_by_classes` is not related to the flag `self.filter_empty_gt` and will only be called when the classes is set during initialization no matter `test_mode` is True or False. This brings ambiguous behavior and potential bugs in many cases. After v2.5.0, if `filter_empty_gt=False`, no matter whether the classes are specified in a dataset, the dataset will use all the images in the annotations. If `filter_empty_gt=True` and `test_mode=True`, no matter whether the classes are specified, the dataset will call `get_subset_by_classes` to check the images and filter out images containing no GT boxes. Therefore, the users should be responsible for the data filtering/cleaning process for the test dataset.

### 22.25.3 New Features

- Test time augmentation for single stage detectors (#3844, #3638)
- Support to show the name of experiments during training (#3764)
- Add Shear, Rotate, Translate Augmentation (#3656, #3619, #3687)
- Add image-only transformations including Contrast, Equalize, Color, and Brightness. (#3643)
- Support [YOLACT](#) (#3456)
- Support [CentripetalNet](#) (#3390)
- Support PyTorch 1.6 in docker (#3905)

## 22.25.4 Bug Fixes

- Fix the bug of training ATSS when there is no ground truth boxes (#3702)
- Fix the bug of using Focal Loss when there is `num_pos` is 0 (#3702)
- Fix the label index mapping in dataset browser (#3708)
- Fix Mask R-CNN training stuck problem when there is no positive rois (#3713)
- Fix the bug of `self.rpn_head.test_cfg` in `RPNTTestMixin` by using `self.rpn_head` in `rpn head` (#3808)
- Fix deprecated `Conv2d` from `mmcv.ops` (#3791)
- Fix device bug in `RepPoints` (#3836)
- Fix SABL validating bug (#3849)
- Use <https://download.openmmlab.com/mmcv/dist/index.html> for installing MMCV (#3840)
- Fix `nonzero` in `NMS` for PyTorch 1.6.0 (#3867)
- Fix the API change bug of `PAA` (#3883)
- Fix typo in `bbox_flip` (#3886)
- Fix `cv2` import error of `ligGL.so.1` in `Dockerfile` (#3891)

## 22.25.5 Improvements

- Change to use `mmcv.utils.collect_env` for collecting environment information to avoid duplicate codes (#3779)
- Update checkpoint file names to v2.0 models in documentation (#3795)
- Update tutorials for changing runtime settings (#3778), modifying loss (#3777)
- Improve the function of `simple_test_bboxes` in `SABL` (#3853)
- Convert mask to bool before using it as `img's index` for robustness and speedup (#3870)
- Improve documentation of modules and dataset customization (#3821)

## 22.26 v2.4.0 (5/9/2020)

### Highlights

- Fix lots of issues/bugs and reorganize the trouble shooting page
- Support new methods [SABL](#), [YOLOv3](#), and [PAA Assign](#)
- Support Batch Inference
- Start to publish `mmdet` package to PyPI since v2.3.0
- Switch model zoo to [download.openmmlab.com](https://download.openmmlab.com)

### Backwards Incompatible Changes

- Support Batch Inference (#3564, #3686, #3705): Since v2.4.0, MMDetection could inference model with multiple images in a single GPU. This change influences all the test APIs in MMDetection and downstream codebases. To help the users migrate their code, we use `replace_ImageToTensor` (#3686) to convert legacy test data pipelines during dataset initialization.

- Support RandomFlip with horizontal/vertical/diagonal direction (#3608): Since v2.4.0, MMDetection supports horizontal/vertical/diagonal flip in the data augmentation. This influences bounding box, mask, and image transformations in data augmentation process and the process that will map those data back to the original format.
- Migrate to use `mmlvis` and `mmpycocotools` for COCO and LVIS dataset (#3727). The APIs are fully compatible with the original `lvis` and `pycocotools`. Users need to uninstall the existing `pycocotools` and `lvis` packages in their environment first and install `mmlvis` & `mmpycocotools`.

### Bug Fixes

- Fix default mean/std for onnx (#3491)
- Fix coco evaluation and add metric items (#3497)
- Fix typo for install.md (#3516)
- Fix atss when sampler per gpu is 1 (#3528)
- Fix import of fuse\_conv\_bn (#3529)
- Fix bug of gaussian\_target, update unittest of heatmap (#3543)
- Fixed VOC2012 evaluate (#3553)
- Fix scale factor bug of rescale (#3566)
- Fix with\_XXX\_attributes in base detector (#3567)
- Fix boxes scaling when number is 0 (#3575)
- Fix rfp check when neck config is a list (#3591)
- Fix import of fuse\_conv\_bn in benchmark.py (#3606)
- Fix webcam demo (#3634)
- Fix typo and itemize issues in tutorial (#3658)
- Fix error in distributed training when some levels of FPN are not assigned with bounding boxes (#3670)
- Fix the width and height orders of stride in valid flag generation (#3685)
- Fix weight initialization bug in Res2Net DCN (#3714)
- Fix bug in OHEMSampler (#3677)

### New Features

- Support Cutout augmentation (#3521)
- Support evaluation on multiple datasets through ConcatDataset (#3522)
- Support PAA assign (#3547)
- Support eval metric with pickle results (#3607)
- Support YOLOv3 (#3083)
- Support SABL (#3603)
- Support to publish to Pypi in github-action (#3510)
- Support custom imports (#3641)

### Improvements

- Refactor common issues in documentation (#3530)
- Add pytorch 1.6 to CI config (#3532)

- Add config to runner meta (#3534)
- Add eval-option flag for testing (#3537)
- Add init\_eval to evaluation hook (#3550)
- Add include\_bkg in ClassBalancedDataset (#3577)
- Using config's loading in inference\_detector (#3611)
- Add ATSS ResNet-101 models in model zoo (#3639)
- Update urls to download.openmmlab.com (#3665)
- Support non-mask training for CocoDataset (#3711)

## 22.27 v2.3.0 (5/8/2020)

### Highlights

- The CUDA/C++ operators have been moved to `mmcv.ops`. For backward compatibility `mmdet.ops` is kept as wrappers of `mmcv.ops`.
- Support new methods [CornerNet](#), [DIOU/CIIOU](#) loss, and new dataset: [LVIS V1](#)
- Provide more detailed colab training tutorials and more complete documentation.
- Support to convert RetinaNet from Pytorch to ONNX.

### Bug Fixes

- Fix the model initialization bug of DetectoRS (#3187)
- Fix the bug of module names in NASFCOSHead (#3205)
- Fix the filename bug in publish\_model.py (#3237)
- Fix the dimensionality bug when `inside_flags.any()` is False in dense heads (#3242)
- Fix the bug of forgetting to pass flip directions in MultiScaleFlipAug (#3262)
- Fixed the bug caused by default value of `stem_channels` (#3333)
- Fix the bug of model checkpoint loading for CPU inference (#3318, #3316)
- Fix topk bug when box number is smaller than the expected topk number in ATSSAssigner (#3361)
- Fix the gt priority bug in center\_region\_assigner.py (#3208)
- Fix NaN issue of iou calculation in iou\_loss.py (#3394)
- Fix the bug that `iou_thrs` is not actually used during evaluation in coco.py (#3407)
- Fix test-time augmentation of RepPoints (#3435)
- Fix runtimeError caused by incontinuous tensor in Res2Net+DCN (#3412)

### New Features

- Support [CornerNet](#) (#3036)
- Support [DIOU/CIIOU](#) loss (#3151)
- Support [LVIS V1](#) dataset (#)
- Support customized hooks in training (#3395)
- Support fp16 training of generalized focal loss (#3410)

- Support to convert RetinaNet from Pytorch to ONNX (#3075)

**Improvements**

- Support to process ignore boxes in ATSS assigner (#3082)
- Allow to crop images without ground truth in RandomCrop (#3153)
- Enable the the Accuracy module to set threshold (#3155)
- Refactoring unit tests (#3206)
- Unify the training settings of `to_float32` and `norm_cfg` in RegNets configs (#3210)
- Add colab training tutorials for beginners (#3213, #3273)
- Move CUDA/C++ operators into `mmcv.ops` and keep `mmdet.ops` as warppers for backward compatibility (#3232)(#3457)
- Update installation scripts in documentation (#3290) and dockerfile (#3320)
- Support to set image resize backend (#3392)
- Remove git hash in version file (#3466)
- Check mmcv version to force version compatibility (#3460)

## 22.28 v2.2.0 (1/7/2020)

**Highlights**

- Support new methods: [DetectoRS](#), [PointRend](#), [Generalized Focal Loss](#), [Dynamic R-CNN](#)

**Bug Fixes**

- Fix FreeAnchor when no gt in image (#3176)
- Clean up deprecated usage of `register_module()` (#3092, #3161)
- Fix pretrain bug in NAS FCOS (#3145)
- Fix `num_classes` in SSD (#3142)
- Fix FCOS warmup (#3119)
- Fix `rstrip` in `tools/publish_model.py`
- Fix `flip_ratio` default value in RandomFLip pipeline (#3106)
- Fix cityscapes eval with `ms_rcnn` (#3112)
- Fix RPN softmax (#3056)
- Fix filename of LVIS@v0.5 (#2998)
- Fix nan loss by filtering out-of-frame `gt_bboxes` in COCO (#2999)
- Fix bug in FSAF (#3018)
- Add FocalLoss `num_classes` check (#2964)
- Fix PISA Loss when there are no gts (#2992)
- Avoid nan in `iou_calculator` (#2975)
- Prevent possible bugs in loading and transforms caused by shallow copy (#2967)

**New Features**

- Add DetectoRS (#3064)
- Support Generalize Focal Loss (#3097)
- Support PointRend (#2752)
- Support Dynamic R-CNN (#3040)
- Add DeepFashion dataset (#2968)
- Implement FCOS training tricks (#2935)
- Use BaseDenseHead as base class for anchor-base heads (#2963)
- Add with\_cp for BasicBlock (#2891)
- Add stem\_channels argument for ResNet (#2954)

### Improvements

- Add anchor free base head (#2867)
- Migrate to github action (#3137)
- Add docstring for datasets, pipelines, core modules and methods (#3130, #3125, #3120)
- Add VOC benchmark (#3060)
- Add concat mode in GRoI (#3098)
- Remove cmd arg autore-scale-lr (#3080)
- Use len(data['img\_metas']) to indicate num\_samples (#3073, #3053)
- Switch to EpochBasedRunner (#2976)

## 22.29 v2.1.0 (8/6/2020)

### Highlights

- Support new backbones: [RegNetX](#), [Res2Net](#)
- Support new methods: [NASFCOS](#), [PISA](#), [GRoIE](#)
- Support new dataset: [LVIS](#)

### Bug Fixes

- Change the CLI argument --validate to --no-validate to enable validation after training epochs by default. (#2651)
- Add missing cython to docker file (#2713)
- Fix bug in nms cpu implementation (#2754)
- Fix bug when showing mask results (#2763)
- Fix gcc requirement (#2806)
- Fix bug in async test (#2820)
- Fix mask encoding-decoding bugs in test API (#2824)
- Fix bug in test time augmentation (#2858, #2921, #2944)
- Fix a typo in comment of apis/train (#2877)

- Fix the bug of returning None when no gt bboxes are in the original image in RandomCrop. Fix the bug that misses to handle gt\_bboxes\_ignore, gt\_label\_ignore, and gt\_masks\_ignore in RandomCrop, MinIoURandomCrop and Expand modules. (#2810)
- Fix bug of base\_channels of regnet (#2917)
- Fix the bug of logger when loading pre-trained weights in base detector (#2936)

### **New Features**

- Add IoU models (#2666)
- Add colab demo for inference
- Support class agnostic nms (#2553)
- Add benchmark gathering scripts for development only (#2676)
- Add mmdet-based project links (#2736, #2767, #2895)
- Add config dump in training (#2779)
- Add ClassBalancedDataset (#2721)
- Add res2net backbone (#2237)
- Support RegNetX models (#2710)
- Use `mmcv.FileClient` to support different storage backends (#2712)
- Add ClassBalancedDataset (#2721)
- Code Release: Prime Sample Attention in Object Detection (CVPR 2020) (#2626)
- Implement NASFCOS (#2682)
- Add class weight in CrossEntropyLoss (#2797)
- Support LVIS dataset (#2088)
- Support GRoIE (#2584)

### **Improvements**

- Allow different x and y strides in anchor heads. (#2629)
- Make FSAF loss more robust to no gt (#2680)
- Compute pure inference time instead (#2657) and update inference speed (#2730)
- Avoided the possibility that a patch with 0 area is cropped. (#2704)
- Add warnings when deprecated `imgs_per_gpu` is used. (#2700)
- Add a mask rcnn example for config (#2645)
- Update model zoo (#2762, #2866, #2876, #2879, #2831)
- Add `ori_filename` to `img metas` and use it in test show-dir (#2612)
- Use `img_fields` to handle multiple images during image transform (#2800)
- Add `upsample_cfg` support in FPN (#2787)
- Add `['img']` as default `img_fields` for back compatibility (#2809)
- Rename the pretrained model from `open-mmlab://resnet50_caffe` and `open-mmlab://resnet50_caffe_bgr` to `open-mmlab://detectron/resnet50_caffe` and `open-mmlab://detectron2/resnet50_caffe`. (#2832)

- Added `sleep(2)` in `test.py` to reduce hanging problem (#2847)
- Support `c10::half` in CARAFE (#2890)
- Improve documentations (#2918, #2714)
- Use optimizer constructor in `mmdet` and clean the original implementation in `mmdet.core.optimizer` (#2947)

## 22.30 v2.0.0 (6/5/2020)

In this release, we made lots of major refactoring and modifications.

1. **Faster speed.** We optimize the training and inference speed for common models, achieving up to 30% speedup for training and 25% for inference. Please refer to [model zoo](#) for details.
2. **Higher performance.** We change some default hyperparameters with no additional cost, which leads to a gain of performance for most models. Please refer to [compatibility](#) for details.
3. **More documentation and tutorials.** We add a bunch of documentation and tutorials to help users get started more smoothly. Read it [here](#).
4. **Support PyTorch 1.5.** The support for 1.1 and 1.2 is dropped, and we switch to some new APIs.
5. **Better configuration system.** Inheritance is supported to reduce the redundancy of configs.
6. **Better modular design.** Towards the goal of simplicity and flexibility, we simplify some encapsulation while add more other configurable modules like BBoxCoder, IoUCalculator, OptimizerConstructor, RoIHead. Target computation is also included in heads and the call hierarchy is simpler.
7. Support new methods: [FSAF](#) and PAFPN (part of [PAFPN](#)).

**Breaking Changes** Models training with MMDetection 1.x are not fully compatible with 2.0, please refer to the [compatibility doc](#) for the details and how to migrate to the new version.

### Improvements

- Unify cuda and cpp API for custom ops. (#2277)
- New config files with inheritance. (#2216)
- Encapsulate the second stage into RoI heads. (#1999)
- Refactor GCNet/EmpericalAttention into plugins. (#2345)
- Set low quality match as an option in IoU-based bbox assigners. (#2375)
- Change the codebase's coordinate system. (#2380)
- Refactor the category order in heads. 0 means the first positive class instead of background now. (#2374)
- Add bbox sampler and assigner registry. (#2419)
- Speed up the inference of RPN. (#2420)
- Add `train_cfg` and `test_cfg` as class members in all anchor heads. (#2422)
- Merge target computation methods into heads. (#2429)
- Add bbox coder to support different bbox encoding and losses. (#2480)
- Unify the API for regression loss. (#2156)
- Refactor Anchor Generator. (#2474)
- Make `lr` an optional argument for optimizers. (#2509)

- Migrate to modules and methods in MMCV. (#2502, #2511, #2569, #2572)
- Support PyTorch 1.5. (#2524)
- Drop the support for Python 3.5 and use F-string in the codebase. (#2531)

**Bug Fixes**

- Fix the scale factors for resized images without keep the aspect ratio. (#2039)
- Check if max\_num > 0 before slicing in NMS. (#2486)
- Fix Deformable RoIPool when there is no instance. (#2490)
- Fix the default value of assigned labels. (#2536)
- Fix the evaluation of Cityscapes. (#2578)

**New Features**

- Add deep\_stem and avg\_down option to ResNet, i.e., support ResNetV1d. (#2252)
- Add L1 loss. (#2376)
- Support both polygon and bitmap for instance masks. (#2353, #2540)
- Support CPU mode for inference. (#2385)
- Add optimizer constructor for complicated configuration of optimizers. (#2397, #2488)
- Implement PAFPN. (#2392)
- Support empty tensor input for some modules. (#2280)
- Support for custom dataset classes without overriding it. (#2408, #2443)
- Support to train subsets of coco dataset. (#2340)
- Add iou\_calculator to potentially support more IoU calculation methods. (2405)
- Support class wise mean AP (was removed in the last version). (#2459)
- Add option to save the testing result images. (#2414)
- Support MomentumUpdaterHook. (#2571)
- Add a demo to inference a single image. (#2605)

## 22.31 v1.1.0 (24/2/2020)

**Highlights**

- Dataset evaluation is rewritten with a unified api, which is used by both evaluation hooks and test scripts.
- Support new methods: [CARAFE](#).

**Breaking Changes**

- The new MMDDP inherits from the official DDP, thus the `__init__` api is changed to be the same as official DDP.
- The `mask_head` field in HTC config files is modified.
- The evaluation and testing script is updated.
- In all transforms, instance masks are stored as a numpy array shaped (n, h, w) instead of a list of (h, w) arrays, where n is the number of instances.

**Bug Fixes**

- Fix IOU assigners when `ignore_iof_thr > 0` and there is no pred boxes. (#2135)
- Fix mAP evaluation when there are no ignored boxes. (#2116)
- Fix the empty RoI input for Deformable RoI Pooling. (#2099)
- Fix the dataset settings for multiple workflows. (#2103)
- Fix the warning related to `torch.uint8` in PyTorch 1.4. (#2105)
- Fix the inference demo on devices other than `gpu:0`. (#2098)
- Fix Dockerfile. (#2097)
- Fix the bug that `pad_val` is unused in Pad transform. (#2093)
- Fix the albuumentation transform when there is no ground truth bbox. (#2032)

**Improvements**

- Use torch instead of numpy for random sampling. (#2094)
- Migrate to the new MMDDP implementation in MMCV v0.3. (#2090)
- Add meta information in logs. (#2086)
- Rewrite Soft NMS with pytorch extension and remove cython as a dependency. (#2056)
- Rewrite dataset evaluation. (#2042, #2087, #2114, #2128)
- Use numpy array for masks in transforms. (#2030)

**New Features**

- Implement “CARAFE: Content-Aware ReAssembly of FEatures”. (#1583)
- Add `worker_init_fn()` in `data_loader` when seed is set. (#2066, #2111)
- Add logging utils. (#2035)

## 22.32 v1.0.0 (30/1/2020)

This release mainly improves the code quality and add more docstrings.

**Highlights**

- Documentation is online now: <https://mmdetection.readthedocs.io>.
- Support new models: [ATSS](#).
- DCN is now available with the api `build_conv_layer` and `ConvModule` like the normal conv layer.
- A tool to collect environment information is available for trouble shooting.

**Bug Fixes**

- Fix the incompatibility of the latest numpy and pycocotools. (#2024)
- Fix the case when distributed package is unavailable, e.g., on Windows. (#1985)
- Fix the dimension issue for `refine_bboxes()`. (#1962)
- Fix the typo when `seg_prefix` is a list. (#1906)
- Add segmentation map cropping to `RandomCrop`. (#1880)

- Fix the return value of `ga_shape_target_single()`. (#1853)
- Fix the loaded shape of empty proposals. (#1819)
- Fix the mask data type when using albumentation. (#1818)

### Improvements

- Enhance `AssignResult` and `SamplingResult`. (#1995)
- Add ability to overwrite existing module in Registry. (#1982)
- Reorganize requirements and make albumentations and imagecorruptions optional. (#1969)
- Check NaN in `SSDHead`. (#1935)
- Encapsulate the DCN in `ResNe(X)t` into a `ConvModule` & `Conv_layers`. (#1894)
- Refactoring for mAP evaluation and support multiprocessing and logging. (#1889)
- Init the root logger before constructing `Runner` to log more information. (#1865)
- Split `SegResizeFlipPadRescale` into different existing transforms. (#1852)
- Move `init_dist()` to `MMCV`. (#1851)
- Documentation and docstring improvements. (#1971, #1938, #1869, #1838)
- Fix the color of the same class for mask visualization. (#1834)
- Remove the option `keep_all_stages` in HTC and Cascade R-CNN. (#1806)

### New Features

- Add two test-time options `crop_mask` and `rle_mask_encode` for mask heads. (#2013)
- Support loading grayscale images as single channel. (#1975)
- Implement “Bridging the Gap Between Anchor-based and Anchor-free Detection via Adaptive Training Sample Selection”. (#1872)
- Add sphinx generated docs. (#1859, #1864)
- Add GN support for flops computation. (#1850)
- Collect env info for trouble shooting. (#1812)

## 22.33 v1.0rc1 (13/12/2019)

The RC1 release mainly focuses on improving the user experience, and fixing bugs.

### Highlights

- Support new models: [FoveaBox](#), [RepPoints](#) and [FreeAnchor](#).
- Add a Dockerfile.
- Add a jupyter notebook demo and a webcam demo.
- Setup the code style and CI.
- Add lots of docstrings and unit tests.
- Fix lots of bugs.

### Breaking Changes

- There was a bug for computing COCO-style mAP w.r.t different scales (AP\_s, AP\_m, AP\_l), introduced by #621. (#1679)

### Bug Fixes

- Fix a sampling interval bug in Libra R-CNN. (#1800)
- Fix the learning rate in SSD300 WIDER FACE. (#1781)
- Fix the scaling issue when `keep_ratio=False`. (#1730)
- Fix typos. (#1721, #1492, #1242, #1108, #1107)
- Fix the shuffle argument in `build_data_loader`. (#1693)
- Clip the proposal when computing mask targets. (#1688)
- Fix the “index out of range” bug for samplers in some corner cases. (#1610, #1404)
- Fix the NMS issue on devices other than GPU:0. (#1603)
- Fix SSD Head and GHM Loss on CPU. (#1578)
- Fix the OOM error when there are too many gt bboxes. (#1575)
- Fix the wrong keyword argument `nms_cfg` in HTC. (#1573)
- Process masks and semantic segmentation in Expand and MinIoUCrop transforms. (#1550, #1361)
- Fix a scale bug in the Non Local op. (#1528)
- Fix a bug in transforms when `gt_bboxes_ignore` is None. (#1498)
- Fix a bug when `img_prefix` is None. (#1497)
- Pass the device argument to `grid_anchors` and `valid_flags`. (#1478)
- Fix the data pipeline for `test_robustness`. (#1476)
- Fix the argument type of deformable pooling. (#1390)
- Fix the `coco_eval` when there are only two classes. (#1376)
- Fix a bug in Modulated DeformableConv when `deformable_group>1`. (#1359)
- Fix the mask cropping in RandomCrop. (#1333)
- Fix zero outputs in DeformConv when not running on cuda:0. (#1326)
- Fix the type issue in Expand. (#1288)
- Fix the inference API. (#1255)
- Fix the inplace operation in Expand. (#1249)
- Fix the from-scratch training config. (#1196)
- Fix inplace add in RoIExtractor which cause an error in PyTorch 1.2. (#1160)
- Fix FCOS when input images has no positive sample. (#1136)
- Fix recursive imports. (#1099)

### Improvements

- Print the config file and mmdet version in the log. (#1721)
- Lint the code before compiling in travis CI. (#1715)
- Add a probability argument for the Expand transform. (#1651)

- Update the PyTorch and CUDA version in the docker file. (#1615)
- Raise a warning when specifying `--validate` in non-distributed training. (#1624, #1651)
- Beautify the mAP printing. (#1614)
- Add pre-commit hook. (#1536)
- Add the argument `in_channels` to backbones. (#1475)
- Add lots of docstrings and unit tests, thanks to [@Erotemic](#). (#1603, #1517, #1506, #1505, #1491, #1479, #1477, #1475, #1474)
- Add support for multi-node distributed test when there is no shared storage. (#1399)
- Optimize Dockerfile to reduce the image size. (#1306)
- Update new results of HRNet. (#1284, #1182)
- Add an argument `no_norm_on_lateral` in FPN. (#1240)
- Test the compiling in CI. (#1235)
- Move docs to a separate folder. (#1233)
- Add a jupyter notebook demo. (#1158)
- Support different type of dataset for training. (#1133)
- Use `int64_t` instead of `long` in cuda kernels. (#1131)
- Support unsquare RoIs for bbox and mask heads. (#1128)
- Manually add type promotion to make compatible to PyTorch 1.2. (#1114)
- Allowing validation dataset for computing validation loss. (#1093)
- Use `.scalar_type()` instead of `.type()` to suppress some warnings. (#1070)

### New Features

- Add an option `--with_ap` to compute the AP for each class. (#1549)
- Implement “FreeAnchor: Learning to Match Anchors for Visual Object Detection”. (#1391)
- Support [Albumentations](#) for augmentations in the data pipeline. (#1354)
- Implement “FoveaBox: Beyond Anchor-based Object Detector”. (#1339)
- Support horizontal and vertical flipping. (#1273, #1115)
- Implement “RepPoints: Point Set Representation for Object Detection”. (#1265)
- Add test-time augmentation to HTC and Cascade R-CNN. (#1251)
- Add a COCO result analysis tool. (#1228)
- Add Dockerfile. (#1168)
- Add a webcam demo. (#1155, #1150)
- Add FLOPs counter. (#1127)
- Allow arbitrary layer order for ConvModule. (#1078)

## 22.34 v1.0rc0 (27/07/2019)

- Implement lots of new methods and components (Mixed Precision Training, HTC, Libra R-CNN, Guided Anchoring, Empirical Attention, Mask Scoring R-CNN, Grid R-CNN (Plus), GHM, GCNet, FCOS, HRNet, Weight Standardization, etc.). Thank all collaborators!
- Support two additional datasets: WIDER FACE and Cityscapes.
- Refactoring for loss APIs and make it more flexible to adopt different losses and related hyper-parameters.
- Speed up multi-gpu testing.
- Integrate all compiling and installing in a single script.

## 22.35 v0.6.0 (14/04/2019)

- Up to 30% speedup compared to the model zoo.
- Support both PyTorch stable and nightly version.
- Replace NMS and SigmoidFocalLoss with Pytorch CUDA extensions.

## 22.36 v0.6rc0(06/02/2019)

- Migrate to PyTorch 1.0.

## 22.37 v0.5.7 (06/02/2019)

- Add support for Deformable ConvNet v2. (Many thanks to the authors and [@chengdazhi](#))
- This is the last release based on PyTorch 0.4.1.

## 22.38 v0.5.6 (17/01/2019)

- Add support for Group Normalization.
- Unify RPNHead and single stage heads (RetinaHead, SSDHead) with AnchorHead.

## 22.39 v0.5.5 (22/12/2018)

- Add SSD for COCO and PASCAL VOC.
- Add ResNeXt backbones and detection models.
- Refactoring for Samplers/Assigners and add OHEM.
- Add VOC dataset and evaluation scripts.

## 22.40 v0.5.4 (27/11/2018)

- Add SingleStageDetector and RetinaNet.

## 22.41 v0.5.3 (26/11/2018)

- Add Cascade R-CNN and Cascade Mask R-CNN.
- Add support for Soft-NMS in config files.

## 22.42 v0.5.2 (21/10/2018)

- Add support for custom datasets.
- Add a script to convert PASCAL VOC annotations to the expected format.

## 22.43 v0.5.1 (20/10/2018)

- Add BBoxAssigner and BBoxSampler, the `train_cfg` field in config files are restructured.
- `ConvFCRoIHead` / `SharedFCRoIHead` are renamed to `ConvFCBBoxHead` / `SharedFCBBoxHead` for consistency.

## FREQUENTLY ASKED QUESTIONS

We list some common troubles faced by many users and their corresponding solutions here. Feel free to enrich the list if you find any frequent issues and have ways to help others to solve them. If the contents here do not cover your issue, please create an issue using the [provided templates](#) and make sure you fill in all required information in the template.

### 23.1 PyTorch 2.0 Support

The vast majority of algorithms in MMDetection now support PyTorch 2.0 and its `torch.compile` function. Users only need to install MMDetection 3.0.0rc7 or later versions to enjoy this feature. If any unsupported algorithms are found during use, please feel free to give us feedback. We also welcome contributions from the community to benchmark the speed improvement brought by using the `torch.compile` function.

To enable the `torch.compile` function, simply add `--cfg-options compile=True` after `train.py` or `test.py`. For example, to enable `torch.compile` for RTMDet, you can use the following command:

```
# Single GPU
python tools/train.py configs/rtdet/rtdet_s_8xb32-300e_coco.py --cfg-options_
↪ compile=True

# Single node multiple GPUs
./tools/dist_train.sh configs/rtdet/rtdet_s_8xb32-300e_coco.py 8 --cfg-options_
↪ compile=True

# Single node multiple GPUs + AMP
./tools/dist_train.sh configs/rtdet/rtdet_s_8xb32-300e_coco.py 8 --cfg-options_
↪ compile=True --amp
```

It is important to note that PyTorch 2.0's support for dynamic shapes is not yet fully developed. In most object detection algorithms, not only are the input shapes dynamic, but the loss calculation and post-processing parts are also dynamic. This can lead to slower training speeds when using the `torch.compile` function. Therefore, if you wish to enable the `torch.compile` function, you should follow these principles:

1. Input images to the network are fixed shape, not multi-scale
2. set `torch._dynamo.config.cache_size_limit` parameter. TorchDynamo will convert and cache the Python bytecode, and the compiled functions will be stored in the cache. When the next check finds that the function needs to be recompiled, the function will be recompiled and cached. However, if the number of recompilations exceeds the maximum value set (64), the function will no longer be cached or recompiled. As mentioned above, the loss calculation and post-processing parts of the object detection algorithm are also dynamically calculated, and these functions need to be recompiled every time. Therefore, setting the `torch._dynamo.config.cache_size_limit` parameter to a smaller value can effectively reduce the compilation time

In MMDetection, you can set the `torch._dynamo.config.cache_size_limit` parameter through the environment variable `DYNAMO_CACHE_SIZE_LIMIT`. For example, the command is as follows:

```
# Single GPU
export DYNAMO_CACHE_SIZE_LIMIT = 4
python tools/train.py configs/rtdet/rtdet_s_8xb32-300e_coco.py --cfg-options_
↪ compile=True

# Single node multiple GPUs
export DYNAMO_CACHE_SIZE_LIMIT = 4
./tools/dist_train.sh configs/rtdet/rtdet_s_8xb32-300e_coco.py 8 --cfg-options_
↪ compile=True
```

About the common questions about PyTorch 2.0's dynamo, you can refer to [here](#)

## 23.2 Installation

Compatibility issue between MMCV and MMDetection; “ConvWS is already registered in conv layer”; “AssertionError: MMCV==xxx is used but incompatible. Please install mmcv>=xxx, <=xxx.”

Compatible MMDetection, MMEEngine, and MMCV versions are shown as below. Please choose the correct version of MMCV to avoid installation issues.

### Note:

1. If you want to install mmdet-v2.x, the compatible MMDetection and MMCV versions table can be found at [here](#). Please choose the correct version of MMCV to avoid installation issues.
2. In MMCV-v2.x, `mmcv-full` is rename to `mmcv`, if you want to install `mmcv` without CUDA ops, you can install `mmcv-lite`.
  - “No module named ‘mmcv.ops’”; “No module named ‘mmcv.\_ext’”.
    1. Uninstall existing `mmcv-lite` in the environment using `pip uninstall mmcv-lite`.
    2. Install `mmcv` following the [installation instruction](#).
  - “Microsoft Visual C++ 14.0 or greater is required” during installation on Windows.

This error happens when building the ‘pycocotools.\_mask’ extension of pycocotools and the environment lacks corresponding C++ compilation dependencies. You need to download it at Microsoft officials [visual-cpp-build-tools](#), select the “Use C++ Desktop Development” option to install the minimum dependencies, and then reinstall pycocotools.

- Using Albumentations

If you would like to use albumentations, we suggest using `pip install -r requirements/albu.txt` or `pip install -U albumentations --no-binary qudida,albumentations`. If you simply use `pip install albumentations>=0.3.2`, it will install `opencv-python-headless` simultaneously (even though you have already installed `opencv-python`). Please refer to the [official documentation](#) for details.

- `ModuleNotFoundError` is raised when using some algorithms

Some extra dependencies are required for Instaboost, Panoptic Segmentation, LVIS dataset, etc. Please note the error message and install corresponding packages, e.g.,

```
# for instaboost
pip install instaboostfast
```

(continues on next page)

(continued from previous page)

```
# for panoptic segmentation
pip install git+https://github.com/cocodataset/panopticapi.git
# for LVIS dataset
pip install git+https://github.com/lvis-dataset/lvis-api.git
```

## 23.3 Coding

- Do I need to reinstall mmdet after some code modifications

If you follow the best practice and install mmdet with `pip install -e .`, any local modifications made to the code will take effect without reinstallation.

- How to develop with multiple MMDetection versions

You can have multiple folders like mmdet-3.0, mmdet-3.1. When you run the train or test script, it will adopt the mmdet package in the current folder.

To use the default MMDetection installed in the environment rather than the one you are working with, you can remove the following line in those scripts:

```
PYTHONPATH="$(dirname $0)/..":$PYTHONPATH
```

## 23.4 PyTorch/CUDA Environment

- “RTX 30 series card fails when building MMCV or MMDet”

1. Temporary work-around: `do MMCV_WITH_OPS=1 MMCV_CUDA_ARGS='-gencode=arch=compute_80,code=sm_80' pip install -e .`. The common issue is `nvcc fatal : Unsupported gpu architecture 'compute_86'`. This means that the compiler should optimize for sm\_86, i.e., Nvidia 30 series card, but such optimizations have not been supported by CUDA toolkit 11.0. This work-around modifies the compile flag by adding `MMCV_CUDA_ARGS='-gencode=arch=compute_80,code=sm_80'`, which tells `nvcc` to optimize for **sm\_80**, i.e., Nvidia A100. Although A100 is different from the 30 series card, they use similar ampere architecture. This may hurt the performance but it works.

2. PyTorch developers have updated that the default compiler flags should be fixed by [pytorch/pytorch#47585](#). So using PyTorch-nightly may also be able to solve the problem, though we have not tested it yet.

- “invalid device function” or “no kernel image is available for execution”.

1. Check if your cuda runtime version (under `/usr/local/`), `nvcc --version` and `conda list cudatoolkit` version match.
2. Run `python mmdet/utils/collect_env.py` to check whether PyTorch, torchvision, and MMCV are built for the correct GPU architecture. You may need to set `TORCH_CUDA_ARCH_LIST` to reinstall MMCV. The GPU arch table could be found [here](#), i.e. run `TORCH_CUDA_ARCH_LIST=7.0 pip install mmcv` to build MMCV for Volta GPUs. The compatibility issue could happen when using old GPUS, e.g., Tesla K80 (3.7) on colab.
3. Check whether the running environment is the same as that when mmcv/mmdet has compiled. For example, you may compile mmcv using CUDA 10.0 but run it on CUDA 9.0 environments.

- “undefined symbol” or “cannot open xxx.so”.

1. If those symbols are CUDA/C++ symbols (e.g., libcuda.so or GLIBCXX), check whether the CUDA/GCC runtimes are the same as those used for compiling mmcv, i.e. run `python mmdet/utils/collect_env.py` to see if "MMCV Compiler"/"MMCV CUDA Compiler" is the same as "GCC"/"CUDA\_HOME".
  2. If those symbols are PyTorch symbols (e.g., symbols containing caffe, aten, and TH), check whether the PyTorch version is the same as that used for compiling mmcv.
  3. Run `python mmdet/utils/collect_env.py` to check whether PyTorch, torchvision, and MMCV are built by and running on the same environment.
- `setuptools.sandbox.UnpickleableException: DistutilsSetupError("each element of 'ext_modules' option must be an Extension instance or 2-tuple")`
    1. If you are using miniconda rather than anaconda, check whether Cython is installed as indicated in [#3379](#). You need to manually install Cython first and then run command `pip install -r requirements.txt`.
    2. You may also need to check the compatibility between the `setuptools`, `Cython`, and `PyTorch` in your environment.
  - "Segmentation fault".
    1. Check your GCC version and use GCC 5.4. This usually caused by the incompatibility between PyTorch and the environment (e.g., GCC < 4.9 for PyTorch). We also recommend the users to avoid using GCC 5.5 because many feedbacks report that GCC 5.5 will cause "segmentation fault" and simply changing it to GCC 5.4 could solve the problem.
    2. Check whether PyTorch is correctly installed and could use CUDA op, e.g. type the following command in your terminal.

```
python -c 'import torch; print(torch.cuda.is_available())'
```

And see whether they could correctly output results.

3. If Pytorch is correctly installed, check whether MMCV is correctly installed.

```
python -c 'import mmcv; import mmcv.ops'
```

If MMCV is correctly installed, then there will be no issue of the above two commands.

4. If MMCV and Pytorch is correctly installed, you can use `ipdb`, `pdb` to set breakpoints or directly add 'print' in mmdetection code and see which part leads the segmentation fault.

## 23.5 Training

- "Loss goes Nan"
  1. Check if the dataset annotations are valid: zero-size bounding boxes will cause the regression loss to be Nan due to the commonly used transformation for box regression. Some small size (width or height are smaller than 1) boxes will also cause this problem after data augmentation (e.g., instaboost). So check the data and try to filter out those zero-size boxes and skip some risky augmentations on the small-size boxes when you face the problem.
  2. Reduce the learning rate: the learning rate might be too large due to some reasons, e.g., change of batch size. You can rescale them to the value that could stably train the model.
  3. Extend the warmup iterations: some models are sensitive to the learning rate at the start of the training. You can extend the warmup iterations, e.g., change the `warmup_iters` from 500 to 1000 or 2000.

4. Add gradient clipping: some models requires gradient clipping to stabilize the training process. The default of `grad_clip` is `None`, you can add gradient clippint to avoid gradients that are too large, i.e., set `optim_wrapper=dict(clip_grad=dict(max_norm=35, norm_type=2))` in your config file.
- “GPU out of memory”
    1. There are some scenarios when there are large amount of ground truth boxes, which may cause OOM during target assignment. You can set `gpu_assign_thr=N` in the config of assigner thus the assigner will calculate box overlaps through CPU when there are more than N GT boxes.
    2. Set `with_cp=True` in the backbone. This uses the sublinear strategy in PyTorch to reduce GPU memory cost in the backbone.
    3. Try mixed precision training using following the examples in `config/fp16`. The `loss_scale` might need further tuning for different models.
    4. Try to use `AvoidCUDAOOM` to avoid GPU out of memory. It will first retry after calling `torch.cuda.empty_cache()`. If it still fails, it will then retry by converting the type of inputs to FP16 format. If it still fails, it will try to copy inputs from GPUs to CPUs to continue computing. Try `AvoidOOM` in you code to make the code continue to run when GPU memory runs out:

```
from mmdet.utils import AvoidCUDAOOM

output = AvoidCUDAOOM.retry_if_cuda_oom(some_function)(input1, input2)
```

You can also try `AvoidCUDAOOM` as a decorator to make the code continue to run when GPU memory runs out:

```
from mmdet.utils import AvoidCUDAOOM

@AvoidCUDAOOM.retry_if_cuda_oom
def function(*args, **kwargs):
    ...
    return xxx
```

- “RuntimeError: Expected to have finished reduction in the prior iteration before starting a new one”
  1. This error indicates that your module has parameters that were not used in producing loss. This phenomenon may be caused by running different branches in your code in DDP mode.
  2. You can set `find_unused_parameters = True` in the config to solve the above problems, but this will slow down the training speed.
  3. You can set `detect_anomalous_params = True` in the config or `model_wrapper_cfg = dict(type='MMDistributedDataParallel', detect_anomalous_params=True)` (More details please refer to [MMEEngine](#)) to get the name of those unused parameters. Note `detect_anomalous_params = True` will slow down the training speed, so it is recommended for debugging only.
- Save the best model

It can be turned on by configuring `default_hooks = dict(checkpoint=dict(type='CheckpointHook', interval=1, save_best='auto'))`. In the case of the `auto` parameter, the first key in the returned evaluation result will be used as the basis for selecting the best model. You can also directly set the key in the evaluation result to manually set it, for example, `save_best='coco/bbox_mAP'`.

## 23.6 Evaluation

- COCO Dataset, AP or AR = -1
  1. According to the definition of COCO dataset, the small and medium areas in an image are less than 1024 (32\*32), 9216 (96\*96), respectively.
  2. If the corresponding area has no object, the result of AP and AR will set to -1.

## 23.7 Model

- style in ResNet

The `style` parameter in ResNet allows either `pytorch` or `caffe` style. It indicates the difference in the Bottleneck module. Bottleneck is a stacking structure of 1x1-3x3-1x1 convolutional layers. In the case of `caffe` mode, the convolution layer with `stride=2` is the first 1x1 convolution, while in `pytorch` mode, it is the second 3x3 convolution has `stride=2`. A sample code is as below:

```
if self.style == 'pytorch':
    self.conv1_stride = 1
    self.conv2_stride = stride
else:
    self.conv1_stride = stride
    self.conv2_stride = 1
```

- ResNeXt parameter description

ResNeXt comes from the paper [Aggregated Residual Transformations for Deep Neural Networks](#). It introduces group and uses “cardinality” to control the number of groups to achieve a balance between accuracy and complexity. It controls the basic width and grouping parameters of the internal Bottleneck module through two hyperparameters `baseWidth` and `cardinality`. An example configuration name in MMDetection is `mask_rcnn_x101_64x4d_fpn_mstrain-poly_3x_coco.py`, where `mask_rcnn` represents the algorithm using Mask R-CNN, `x101` represents the backbone network using ResNeXt-101, and `64x4d` represents that the bottleneck block has 64 group and each group has basic width of 4.

- `norm_eval` in backbone

Since the detection model is usually large and the input image resolution is high, this will result in a small batch of the detection model, which will make the variance of the statistics calculated by BatchNorm during the training process very large and not as stable as the statistics obtained during the pre-training of the backbone network. Therefore, the `norm_eval=True` mode is generally used in training, and the BatchNorm statistics in the pre-trained backbone network are directly used. The few algorithms that use large batches are the `norm_eval=False` mode, such as NASFPN. For the backbone network without ImageNet pre-training and the batch is relatively small, you can consider using SyncBN.

## COMPATIBILITY OF MMDetection 2.X

### 24.1 MMDetection 2.25.0

In order to support Mask2Former for instance segmentation, the original config files of Mask2Former for panoptic segmentation need to be renamed [PR #7571](#).

`'mask2former_xxx_coco.py'` represents config files **for** `**panoptic segmentation**`.

`'mask2former_xxx_coco.py'` represents config files **for** `**instance segmentation**`.  
`'mask2former_xxx_coco-panoptic.py'` represents config files **for** `**panoptic segmentation**`.

### 24.2 MMDetection 2.21.0

In order to support CPU training, the logic of scatter in batch collating has been changed. We recommend to use MMCV v1.4.4 or higher. For more details, please refer to [MMCV PR #1621](#).

### 24.3 MMDetection 2.18.1

#### 24.3.1 MMCV compatibility

In order to fix the wrong weight reference bug in BaseTransformerLayer, the logic in batch first mode of MultiheadAttention has been changed. We recommend to use MMCV v1.3.17 or higher. For more details, please refer to [MMCV PR #1418](#).

### 24.4 MMDetection 2.18.0

#### 24.4.1 DIIHead compatibility

In order to support QueryInst, `attn_feats` is added into the returned tuple of DIIHead.

## 24.5 MMDetection 2.14.0

### 24.5.1 MMCV Version

In order to fix the problem that the priority of EvalHook is too low, all hook priorities have been re-adjusted in 1.3.8, so MMDetection 2.14.0 needs to rely on the latest MMCV 1.3.8 version. For related information, please refer to [#1120](#), for related issues, please refer to [#5343](#).

### 24.5.2 SSD compatibility

In v2.14.0, to make SSD more flexible to use, [PR5291](#) refactored its backbone, neck and head. The users can use the script `tools/model_converters/upgrade_ssd_version.py` to convert their models.

```
python tools/model_converters/upgrade_ssd_version.py ${OLD_MODEL_PATH} ${NEW_MODEL_PATH}
```

- OLD\_MODEL\_PATH: the path to load the old version SSD model.
- NEW\_MODEL\_PATH: the path to save the converted model weights.

## 24.6 MMDetection 2.12.0

MMDetection is going through big refactoring for more general and convenient usages during the releases from v2.12.0 to v2.18.0 (maybe longer). In v2.12.0 MMDetection inevitably brings some BC-breakings, including the MMCV dependency, model initialization, model registry, and mask AP evaluation.

### 24.6.1 MMCV Version

MMDetection v2.12.0 relies on the newest features in MMCV 1.3.3, including `BaseModule` for unified parameter initialization, model registry, and the CUDA operator `MultiScaleDeformableAttn` for [Deformable DETR](#). Note that MMCV 1.3.2 already contains all the features used by MMDet but has known issues. Therefore, we recommend users to skip MMCV v1.3.2 and use v1.3.2, though v1.3.2 might work for most of the cases.

### 24.6.2 Unified model initialization

To unify the parameter initialization in OpenMMLab projects, MMCV supports `BaseModule` that accepts `init_cfg` to allow the modules' parameters initialized in a flexible and unified manner. Now the users need to explicitly call `model.init_weights()` in the training script to initialize the model (as in [here](#), previously this was handled by the detector. **The downstream projects must update their model initialization accordingly to use MMDetection v2.12.0.** Please refer to PR [#4750](#) for details.

### 24.6.3 Unified model registry

To easily use backbones implemented in other OpenMMLab projects, MMDetection v2.12.0 inherits the model registry created in MMCV (#760). In this way, as long as the backbone is supported in an OpenMMLab project and that project also uses the registry in MMCV, users can use that backbone in MMDetection by simply modifying the config without copying the code of that backbone into MMDetection. Please refer to PR #5059 for more details.

### 24.6.4 Mask AP evaluation

Before PR 4898 and V2.12.0, the mask AP of small, medium, and large instances is calculated based on the bounding box area rather than the real mask area. This leads to higher APs and AP<sub>m</sub> but lower AP<sub>l</sub> but will not affect the overall mask AP. PR 4898 change it to use mask areas by deleting `bbox` in mask AP calculation. The new calculation does not affect the overall mask AP evaluation and is consistent with [Detec-tron2](#).

## 24.7 Compatibility with MMDetection 1.x

MMDetection 2.0 goes through a big refactoring and addresses many legacy issues. It is not compatible with the 1.x version, i.e., running inference with the same model weights in these two versions will produce different results. Thus, MMDetection 2.0 re-benchmarks all the models and provides their links and logs in the model zoo.

The major differences are in four folds: coordinate system, codebase conventions, training hyperparameters, and modular design.

### 24.7.1 Coordinate System

The new coordinate system is consistent with [Detec-tron2](#) and treats the center of the most left-top pixel as (0, 0) rather than the left-top corner of that pixel. Accordingly, the system interprets the coordinates in COCO bounding box and segmentation annotations as coordinates in range `[0, width]` or `[0, height]`. This modification affects all the computation related to the `bbox` and pixel selection, which is more natural and accurate.

- The height and width of a box with corners (x1, y1) and (x2, y2) in the new coordinate system is computed as `width = x2 - x1` and `height = y2 - y1`. In MMDetection 1.x and previous version, a “+ 1” was added both height and width. This modification are in three folds:
  1. Box transformation and encoding/decoding in regression.
  2. IoU calculation. This affects the matching process between ground truth and bounding box and the NMS process. The effect to compatibility is very negligible, though.
  3. The corners of bounding box is in float type and no longer quantized. This should provide more accurate bounding box results. This also makes the bounding box and RoIs not required to have minimum size of 1, whose effect is small, though.
- The anchors are center-aligned to feature grid points and in float type. In MMDetection 1.x and previous version, the anchors are in `int` type and not center-aligned. This affects the anchor generation in RPN and all the anchor-based methods.
- ROIAAlign is better aligned with the image coordinate system. The new implementation is adopted from [Detec-tron2](#). The RoIs are shifted by half a pixel by default when they are used to cropping RoI features, compared to MMDetection 1.x. The old behavior is still available by setting `aligned=False` instead of `aligned=True`.
- Mask cropping and pasting are more accurate.

1. We use the new RoIAlign to crop mask targets. In MMDetection 1.x, the bounding box is quantized before it is used to crop mask target, and the crop process is implemented by numpy. In new implementation, the bounding box for crop is not quantized and sent to RoIAlign. This implementation accelerates the training speed by a large margin (~0.1s per iter, ~2 hour when training Mask R50 for 1x schedule) and should be more accurate.
2. In MMDetection 2.0, the “paste\_mask()” function is different and should be more accurate than those in previous versions. This change follows the modification in [Detectron2](#) and can improve mask AP on COCO by ~0.5% absolute.

## 24.7.2 Codebase Conventions

- MMDetection 2.0 changes the order of class labels to reduce unused parameters in regression and mask branch more naturally (without +1 and -1). This effect all the classification layers of the model to have a different ordering of class labels. The final layers of regression branch and mask head no longer keep K+1 channels for K categories, and their class orders are consistent with the classification branch.
  - In MMDetection 2.0, label “K” means background, and labels [0, K-1] correspond to the K = num\_categories object categories.
  - In MMDetection 1.x and previous version, label “0” means background, and labels [1, K] correspond to the K categories.
  - **Note:** The class order of softmax RPN is still the same as that in 1.x in versions <=2.4.0 while sigmoid RPN is not affected. The class orders in all heads are unified since MMDetection v2.5.0.
- Low quality matching in R-CNN is not used. In MMDetection 1.x and previous versions, the max\_iou\_assigner will match low quality boxes for each ground truth box in both RPN and R-CNN training. We observe this sometimes does not assign the most perfect GT box to some bounding boxes, thus MMDetection 2.0 do not allow low quality matching by default in R-CNN training in the new system. This sometimes may slightly improve the box AP (~0.1% absolute).
- Separate scale factors for width and height. In MMDetection 1.x and previous versions, the scale factor is a single float in mode keep\_ratio=True. This is slightly inaccurate because the scale factors for width and height have slight difference. MMDetection 2.0 adopts separate scale factors for width and height, the improvement on AP ~0.1% absolute.
- Configs name conventions are changed. MMDetection V2.0 adopts the new name convention to maintain the gradually growing model zoo as the following:

```
[model]_(model_setting)_[backbone]_[neck]_(norm_setting)_(misc)_(gpu x batch)_  
↪ [schedule]_[dataset].py,
```

where the (misc) includes DCN and GCBlock, etc. More details are illustrated in the documentation for config

- MMDetection V2.0 uses new ResNet Caffe backbones to reduce warnings when loading pre-trained models. Most of the new backbones' weights are the same as the former ones but do not have conv.bias, except that they use a different img\_norm\_cfg. Thus, the new backbone will not cause warning of unexpected keys.

### 24.7.3 Training Hyperparameters

The change in training hyperparameters does not affect model-level compatibility but slightly improves the performance. The major ones are:

- The number of proposals after nms is changed from 2000 to 1000 by setting `nms_post=1000` and `max_num=1000`. This slightly improves both mask AP and bbox AP by  $\sim 0.2\%$  absolute.
- The default box regression losses for Mask R-CNN, Faster R-CNN and RetinaNet are changed from smooth L1 Loss to L1 loss. This leads to an overall improvement in box AP ( $\sim 0.6\%$  absolute). However, using L1-loss for other methods such as Cascade R-CNN and HTC does not improve the performance, so we keep the original settings for these methods.
- The sample num of RoIAlign layer is set to be 0 for simplicity. This leads to slightly improvement on mask AP ( $\sim 0.2\%$  absolute).
- The default setting does not use gradient clipping anymore during training for faster training speed. This does not degrade performance of the most of models. For some models such as RepPoints we keep using gradient clipping to stabilize the training process and to obtain better performance.
- The default warmup ratio is changed from 1/3 to 0.001 for a more smooth warming up process since the gradient clipping is usually not used. The effect is found negligible during our re-benchmarking, though.

### 24.7.4 Upgrade Models from 1.x to 2.0

To convert the models trained by MMDetection V1.x to MMDetection V2.0, the users can use the script `tools/model_converters/upgrade_model_version.py` to convert their models. The converted models can be run in MMDetection V2.0 with slightly dropped performance (less than 1% AP absolute). Details can be found in `configs/legacy`.

## 24.8 pycocotools compatibility

`mmpycocotools` is the OpenMMLab's fork of official `pycocotools`, which works for both MMDetection and Detectron2. Before [PR 4939](#), since `pycocotools` and `mmpycocotool` have the same package name, if users already installed `pycocotools` (installed Detectron2 first under the same environment), then the setup of MMDetection will skip installing `mmpycocotool`. Thus MMDetection fails due to the missing `mmpycocotools`. If MMDetection is installed before Detectron2, they could work under the same environment. [PR 4939](#) deprecates `mmpycocotools` in favor of official `pycocotools`. Users may install MMDetection and Detectron2 under the same environment after [PR 4939](#), no matter what the installation order is.



---

CHAPTER  
**TWENTYFIVE**

---

**ENGLISH**







## INDICES AND TABLES

- `genindex`
- `search`



## PYTHON MODULE INDEX

### m

- `mmdet.datasets.api_wrappers`, 147
- `mmdet.datasets.samplers`, 147
- `mmdet.engine.hooks`, 151
- `mmdet.engine.optimizers`, 154
- `mmdet.engine.runner`, 155
- `mmdet.engine.schedulers`, 155
- `mmdet.evaluation.functional`, 157
- `mmdet.structures`, 165
- `mmdet.utils`, 173



## A

[add\\_params\(\)](#) (*mmdet.engine.optimizers.LearningRateDecayOptimizerConstructor* method), 154  
[after\\_test\\_iter\(\)](#) (*mmdet.engine.hooks.DetVisualizationHook* method), 152  
[after\\_test\\_iter\(\)](#) (*mmdet.engine.hooks.MemoryProfilerHook* method), 153  
[after\\_train\\_iter\(\)](#) (*mmdet.engine.hooks.CheckInvalidLossHook* method), 151  
[after\\_train\\_iter\(\)](#) (*mmdet.engine.hooks.MeanTeacherHook* method), 152  
[after\\_train\\_iter\(\)](#) (*mmdet.engine.hooks.MemoryProfilerHook* method), 153  
[after\\_val\\_iter\(\)](#) (*mmdet.engine.hooks.DetVisualizationHook* method), 152  
[after\\_val\\_iter\(\)](#) (*mmdet.engine.hooks.MemoryProfilerHook* method), 153  
[all\\_reduce\\_dict\(\)](#) (in module *mmdet.utils*), 174  
[allreduce\\_grads\(\)](#) (in module *mmdet.utils*), 174  
[AspectRatioBatchSampler](#) (class in *mmdet.datasets.samplers*), 147  
[average\\_precision\(\)](#) (in module *mmdet.evaluation.functional*), 157  
[AvoidOOM](#) (class in *mmdet.utils*), 173

## B

[bbox\\_overlaps\(\)](#) (in module *mmdet.evaluation.functional*), 157  
[before\\_train\(\)](#) (*mmdet.engine.hooks.MeanTeacherHook* method), 153  
[before\\_train\\_epoch\(\)](#) (*mmdet.engine.hooks.NumClassCheckHook* method), 153  
[before\\_train\\_epoch\(\)](#) (*mmdet.engine.hooks.PipelineSwitchHook* method), 154  
[before\\_train\\_epoch\(\)](#) (*mmdet.engine.hooks.SetEpochInfoHook* method), 154  
[before\\_train\\_epoch\(\)](#) (*mmdet.engine.hooks.YOLOXModeSwitchHook* method), 154

[before\\_val\\_epoch\(\)](#) (*mmdet.engine.hooks.NumClassCheckHook* method), 154  
[before\\_val\\_epoch\(\)](#) (*mmdet.engine.hooks.SyncNormHook* method), 154  
[build\\_iter\\_from\\_epoch\(\)](#) (*mmdet.engine.schedulers.QuadraticWarmupParamScheduler* class method), 156  

## C

[CheckInvalidLossHook](#) (class in *mmdet.engine.hooks*), 151  
[cifar100\\_classes\(\)](#) (in module *mmdet.evaluation.functional*), 157  
[ClassAwareSampler](#) (class in *mmdet.datasets.samplers*), 148  
[COCO](#) (class in *mmdet.datasets.api\_wrappers*), 147  
[coco\\_classes\(\)](#) (in module *mmdet.evaluation.functional*), 157  
[coco\\_panoptic\\_classes\(\)](#) (in module *mmdet.evaluation.functional*), 157  
[COCOPanoptic](#) (class in *mmdet.datasets.api\_wrappers*), 147  
[collect\\_env\(\)](#) (in module *mmdet.utils*), 174  
[compat\\_cfg\(\)](#) (in module *mmdet.utils*), 174  
[createIndex\(\)](#) (*mmdet.datasets.api\_wrappers.COCOPanoptic* method), 147

## D

[DetDataSample](#) (class in *mmdet.structures*), 165  
[DetVisualizationHook](#) (class in *mmdet.engine.hooks*), 151

## E

[eval\\_map\(\)](#) (in module *mmdet.evaluation.functional*), 157  
[eval\\_recalls\(\)](#) (in module *mmdet.evaluation.functional*), 158  
[evaluateImgLists\(\)](#) (in module *mmdet.evaluation.functional*), 159

## F

[find\\_latest\\_checkpoint\(\)](#) (in module *mmdet.utils*),

174

## G

`get_caller_name()` (in module `mmdet.utils`), 175`get_cat2imgs()` (`mmdet.datasets.samplers.ClassAwareSampler` method), 148`get_classes()` (in module `mmdet.evaluation.functional`), 159`get_test_pipeline_cfg()` (in module `mmdet.utils`), 175`GroupMultiSourceSampler` (class in `mmdet.datasets.samplers`), 148

## I

`imagenet_det_classes()` (in module `mmdet.evaluation.functional`), 159`imagenet_vid_classes()` (in module `mmdet.evaluation.functional`), 159

## L

`LearningRateDecayOptimizerConstructor` (class in `mmdet.engine.optimizers`), 154`load_anns()` (`mmdet.datasets.api_wrappers.COCOPanoptic` method), 147`log_img_scale()` (in module `mmdet.utils`), 175

## M

`MeanTeacherHook` (class in `mmdet.engine.hooks`), 152`MemoryProfilerHook` (class in `mmdet.engine.hooks`), 153`mmdet.datasets.api_wrappers` module, 147`mmdet.datasets.samplers` module, 147`mmdet.engine.hooks` module, 151`mmdet.engine.optimizers` module, 154`mmdet.engine.runner` module, 155`mmdet.engine.schedulers` module, 155`mmdet.evaluation.functional` module, 157`mmdet.structures` module, 165`mmdet.utils` module, 173

module

`mmdet.datasets.api_wrappers`, 147`mmdet.datasets.samplers`, 147`mmdet.engine.hooks`, 151`mmdet.engine.optimizers`, 154`mmdet.engine.runner`, 155`mmdet.engine.schedulers`, 155`mmdet.evaluation.functional`, 157`mmdet.structures`, 165`mmdet.utils`, 173`momentum_update()` (`mmdet.engine.hooks.MeanTeacherHook` method), 153`MultiSourceSampler` (class in `mmdet.datasets.samplers`), 148

## N

`NumClassCheckHook` (class in `mmdet.engine.hooks`), 153

## O

`objects365v1_classes()` (in module `mmdet.evaluation.functional`), 159`objects365v2_classes()` (in module `mmdet.evaluation.functional`), 159`oid_challenge_classes()` (in module `mmdet.evaluation.functional`), 159`oid_v6_classes()` (in module `mmdet.evaluation.functional`), 159

## P

`PipelineSwitchHook` (class in `mmdet.engine.hooks`), 154`plot_iou_recall()` (in module `mmdet.evaluation.functional`), 159`plot_num_recall()` (in module `mmdet.evaluation.functional`), 160`pq_compute_multi_core()` (in module `mmdet.evaluation.functional`), 160`pq_compute_single_core()` (in module `mmdet.evaluation.functional`), 160`print_map_summary()` (in module `mmdet.evaluation.functional`), 160`print_recall_summary()` (in module `mmdet.evaluation.functional`), 161

## Q

`QuadraticWarmupLR` (class in `mmdet.engine.schedulers`), 155`QuadraticWarmupMomentum` (class in `mmdet.engine.schedulers`), 155`QuadraticWarmupParamScheduler` (class in `mmdet.engine.schedulers`), 155

## R

`reduce_mean()` (in module `mmdet.utils`), 175`register_all_modules()` (in module `mmdet.utils`), 175`replace_cfg_vals()` (in module `mmdet.utils`), 175

`retry_if_cuda_oom()` (*mmdet.utils.AvoidOOM*  
*method*), 174  
`run()` (*mmdet.engine.runner.TeacherStudentValLoop*  
*method*), 155

## S

`set_epoch()` (*mmdet.datasets.samplers.ClassAwareSampler*  
*method*), 148  
`set_epoch()` (*mmdet.datasets.samplers.MultiSourceSampler*  
*method*), 149  
`SetEpochInfoHook` (*class in mmdet.engine.hooks*), 154  
`setup_cache_size_limit_of_dynamo()` (*in module*  
*mmdet.utils*), 175  
`setup_multi_processes()` (*in module mmdet.utils*),  
176  
`split_batch()` (*in module mmdet.utils*), 176  
`sync_random_seed()` (*in module mmdet.utils*), 176  
`SyncNormHook` (*class in mmdet.engine.hooks*), 154

## T

`TeacherStudentValLoop` (*class in*  
*mmdet.engine.runner*), 155

## U

`update_data_root()` (*in module mmdet.utils*), 176

## V

`voc_classes()` (*in module*  
*mmdet.evaluation.functional*), 161

## Y

`YOLOXModeSwitchHook` (*class in mmdet.engine.hooks*),  
154